

- Designed specifically for ROV application.
- Forged Steel, Quenched & Tempered, with alloy pins.
- Handles are Carbon Steel.
- Individually stamped with the safe working load.
- Shackle Bows are painted yellow to ensure ease of sight in water.
- Convertible handles on ROV shackle bolts

ROV Anchor Shackle with D-handle and Safety Pin (ROV: Remote Operate Vehicle)

Item No.	Nominal Size	Working Load Limit	Dimensions (inch)									N.W. lbs
	inch	tonnes	A	B	C	D	E	G	H	I	J	
8-951-22	7/8	6.5	0.9	1.0	2.1	0.8	1.5	2.3	5.8	13.6	4.0	9.9
8-951-26	1	8.5	1.0	1.1	2.4	0.9	1.7	2.7	6.5	14.0	4.7	11.2
8-951-28	1-1/8	9.5	1.1	1.3	2.7	1.1	1.8	2.9	7.5	15.0	5.1	13.2
8-951-32	1-1/4	12.0	1.3	1.4	3.0	1.2	2.1	3.3	8.3	15.5	5.8	16.5
8-951-36	1-3/8	13.5	1.4	1.5	3.3	1.3	2.3	3.6	9.1	15.9	6.5	19.6
8-951-38	1-1/2	17.0	1.5	1.8	3.6	1.4	2.4	3.8	10.0	16.3	6.9	24.2
8-951-45	1-3/4	25.0	1.8	2.0	4.2	1.7	2.9	5.0	12.3	18.2	8.7	39.4
8-951-50	2	35.0	2.0	2.2	4.8	2.0	3.3	5.7	13.7	19.1	9.8	58.7

* Minimum Ultimate Load is 5 times the Working Load Limit.


Maximun Proof Load is 2 times the Working Load Limit.

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)									N.W. kg
	mm	tonnes	A	B	C	D	E	G	H	I	J	
8-951-22	22	6.5	22	26	53	21.5	38	58	148	346	102	4.5
8-951-26	26	8.5	26	28	61	23	44	68	166	355	120	5.1
8-951-28	28	9.5	28	32	68	27	46	74	190	380	130	6.0
8-951-32	32	12.0	32	36	76	29.5	54	84	210	393	148	7.5
8-951-36	36	13.5	36	38	84	32	59	92	232	403	164	8.9
8-951-38	38	17.0	38	45	92	35	60.5	97	254	415	175	11.0
8-951-45	45	25.0	45	50	106	44	73	127	313	462	221	17.9
8-951-50	50	35.0	50	57	122	50.8	83.5	146	347.5	486	247.7	26.7

* Minimum Ultimate Load is 5 times the Working Load Limit.

Maximun Proof Load is 2 times the Working Load Limit.



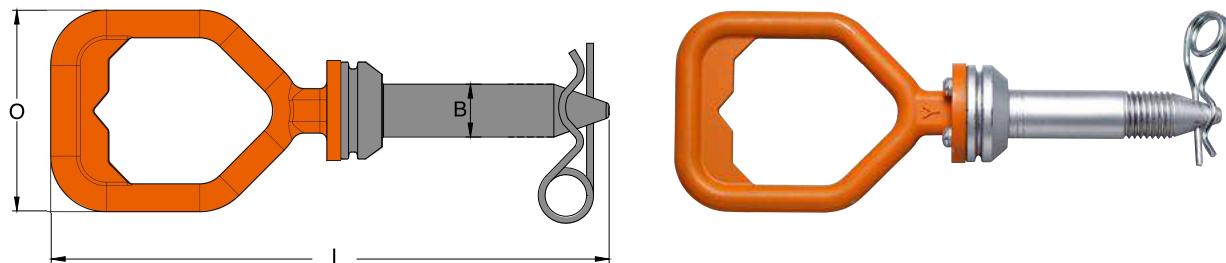

ROV Anchor Shackle D-handle

Item No.	Working Load Limit	Dimensions (inch)			N.W.
		B	I	O	
8-951DH-22	6.5 tonnes	1.02	16.54	5.71	5.1
8-951DH-26	8.5	1.10	16.89	5.71	5.5
8-951DH-28	9.5	1.26	17.87	5.71	6.4
8-951DH-32	12.0	1.42	18.39	5.71	6.8
8-951DH-36	13.5	1.50	18.78	5.71	7.5
8-951DH-38	17.0	1.77	19.25	5.71	9.0
8-951DH-45	25.0	1.97	21.10	5.71	11.7
8-951DH-50	35.0	2.24	22.05	5.71	14.3

Item No.	Working Load Limit	Dimensions (mm)			N.W.
		B	I	O	
8-951DH-22	6.5 tonnes	26	420	145	2.3
8-951DH-26	8.5	28	429	145	2.5
8-951DH-28	9.5	32	454	145	2.9
8-951DH-32	12.0	36	467	145	3.1
8-951DH-36	13.5	38	477	145	3.4
8-951DH-38	17.0	45	489	145	4.1
8-951DH-45	25.0	50	536	145	5.3
8-951DH-50	35.0	57	560	145	6.5