

YOKE®

Safety is our first priority™

2016



Safety Components For Fall Protection


Catalog # N-2016

YOKE

Catalog # N-2016



Worldwide Quality Type Approval And Certificate:

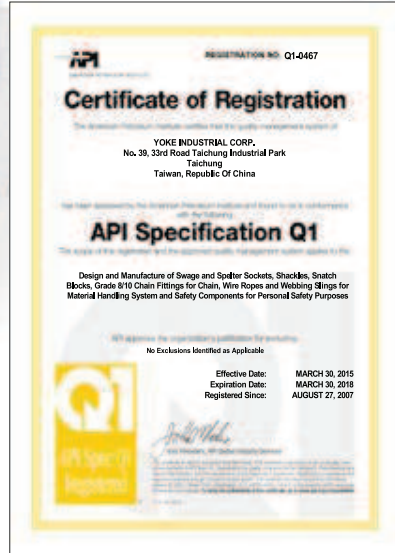

Safety is our first priority™
- Quality, Reliability, Innovation -

Rope Snaps
Rebar Hooks




D Rings
Buckles
Adjusters



Dielectric
Components



Aluminum alloy
& Stainless Steel
Components




Steel &
Aluminum alloy
Carabiners



Rope Grabs



Miscellaneous



Strict Manufacturing, Quality Control, and Testing



YOKE operates a consistent production facility with quality control at every manufacturing stage. From raw materials to the completed product, **YOKE's** quality meets or exceeds ANSI Z359.1/ Z359.12-2009, CSA Z 259.12-2011, EN 362 : 2004, EN 363 specifications.



YOKE is an ISO 9001 certified company and has Type Approval and audit program with CSA International (Canada).

Test Certificates are included with every shipment from **YOKE**. These certificates are your assurance of unsurpassed quality.



- **Spectrographic Analysis :**
Ensure proper metallurgy content of all raw materials.

- **Proof Load Testing :**
All safety harness connecting components are 100% proof loaded to 3600 lbs/ 16 kN.

- **Ultimate Breaking Load Test :**
Connecting and adjusting components are batch tested for ultimate breaking strength.
- connecting components - exceed 5000 lbs
- adjusting components - exceed 4000 lbs

Test Certificate



Year of manufacture & batch code links to Test Certificate

PT: proof load tested

Forged

Warning on the gate

Item Number

Y : Manufacturer (YOKE)
5M : 5000 lbs minimum tensile strength.



WARNING

YOKE HARDWARE IN THIS CATALOGUE IS DESIGNED FOR PERSONAL FALL PROTECTION AND IS NOT TO BE USED FOR MATERIAL HANDLING

YOKE






COMPLETE RANGE OF ANSI Z359.12-2009 CONNECTORS

The ANSI Z359.12-2009 standard requires connectors with an integral eye to have gate strength (side and face) of 3600 lbs.

It also requires connectors without an integral eye to have all around gate strength of 3600 lbs (side, face and minor axis).


YOKE offers a full range of these ANSI Z359.12-2009 connectors

- Snap Hooks
- Swivel Hooks
- Clevis Snap Hooks
- Indicator Swivel Hooks
- Rebar Hooks
- Swivel Rebar Hooks
- Pole Strap Snap Hooks
- Aluminum Rebar Hooks
- Aluminum Snap Hooks

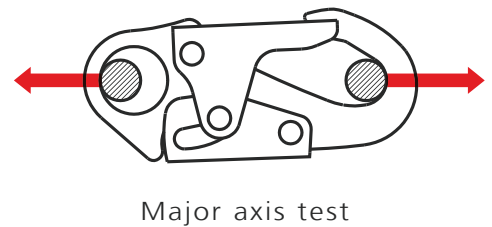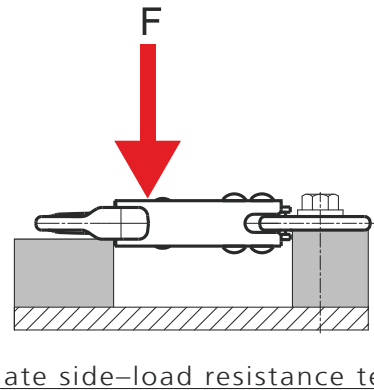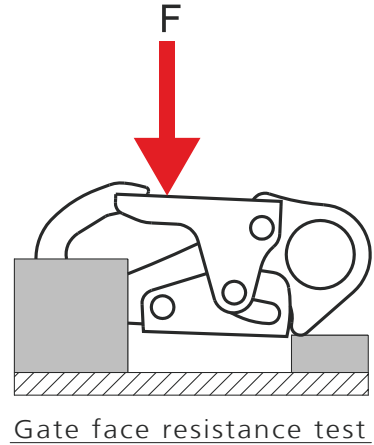

N-3610
Rope Snap Hook
3600 LBS gate strength



Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 13.6 oz. / 388 g.
 yellow zinc




mm (inch)

N-3672
Rope Snap Hook
3600 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 12.0 oz. / 340 g.
 yellow zinc




Patent Pend



mm (inch)

N-3710
Rope Snap Hook
3600 LBS gate strength


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 11.7 oz. / 332 g.
 yellow zinc



mm (inch)

N-3810
Stamped Rope Snap Hook
3600 LBS gate strength

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 12.7 oz. / 362 g.
 yellow zinc




mm (inch)

N-3810X
Stamped Rope Snap Hook
3600 LBS gate strength

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 10.6 oz. / 304 g

yellow zinc

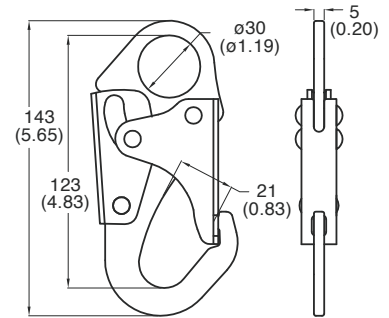


mm (inch)

N-3620
Ladder Hook
3600 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 19.1oz. / 543 g

yellow zinc

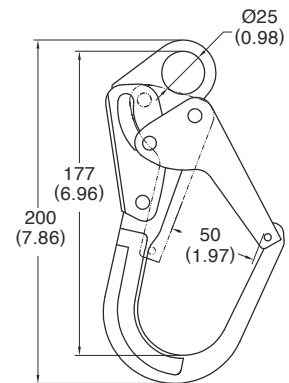


mm (inch)

N-3625
Indicator Swivel Ladder Hook
3600 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 22.5 oz. / 638 g

yellow zinc




mm (inch)

N-3625/0
Swivel Ladder Hook
3600 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets:
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 22.51 oz. / 643 g

yellow zinc

New

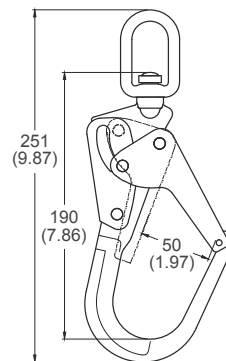


mm (inch)

N-3630
Rebar Hook
3600 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 27.9 oz. / 798 g.


yellow zinc

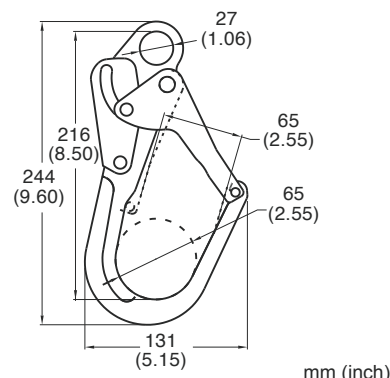

N-3633
Swivel Rebar Hook
3600 LBS gate strength
(non-indicator)

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 31.5 oz. / 900 g.


yellow zinc

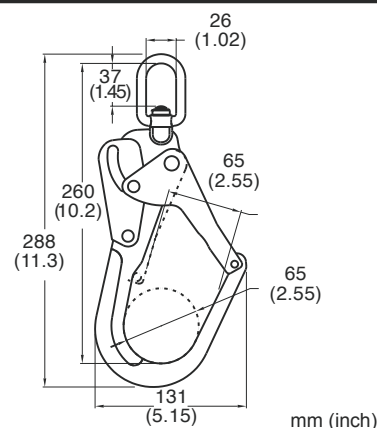

N-3678
Rebar Hook
3600 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 26.2 oz. / 756 g.


yellow zinc

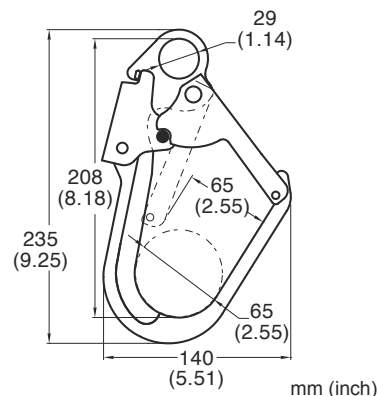

N-3830
Stamped Rebar Hook
3600 LBS gate strength

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 26.4 oz. / 753 g.

yellow zinc

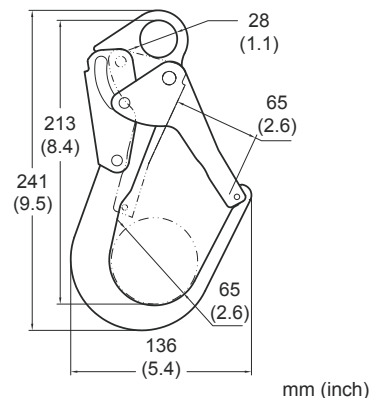

N-3630T
Rebar Hook
3600 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN

Meets :


- ANSI Z359.12-09
- CSA Z259.12-11
- EN 362 : 2004

Net weight : 28.5 oz. / 800 g

*Standard Publication Year TBA

yellow zinc

New

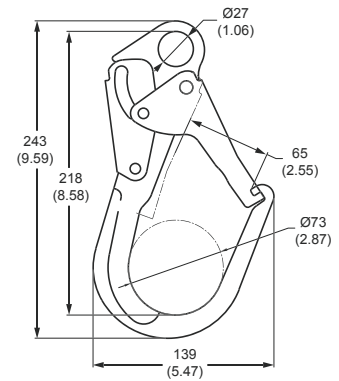

mm (inch)

N-3830T
Stamped Rebar Hook
3600 LBS gate strength

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN

Meets :


- ANSI Z359.12-09
- CSA Z259.12-11
- EN 362 : 2004

Net weight : 26.3 oz. / 752 g

*Standard Publication Year TBA

yellow zinc


New

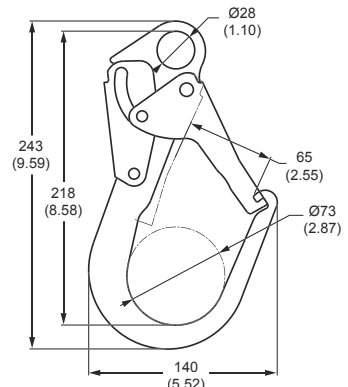

mm (inch)

TRANSVERSE BODY LOADING, both static & dynamic, would apply to hooks & carabiners with a gate opening larger than 1 inch.

Proposed testing is similar to current ANSI / CSA major axis testing (both static and dynamic), however transverse load directs forces along the minor axis (from nose of hook body to 'spine' of hook)

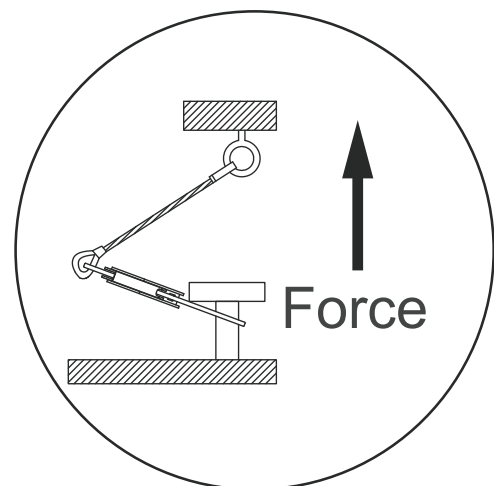


N-3615
Indicator Swivel Hook
3600 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 17.5 oz. / 501 g.

yellow zinc




Indicator activation

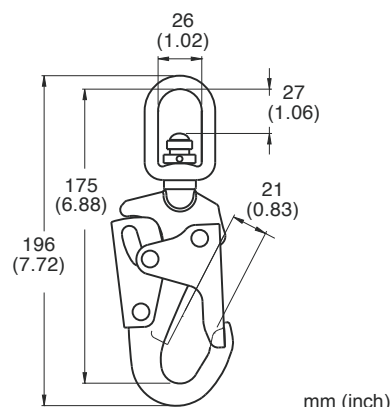

N-3616
Swivel Hook
3600 LBS gate strength
(non-indicator)

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 17.2 oz. / 490 g.


yellow zinc

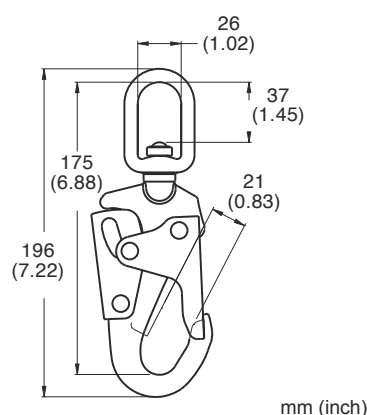

N-3617
Clevis Snap Hook
3600 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 14.0 oz. / 398 g.


yellow zinc

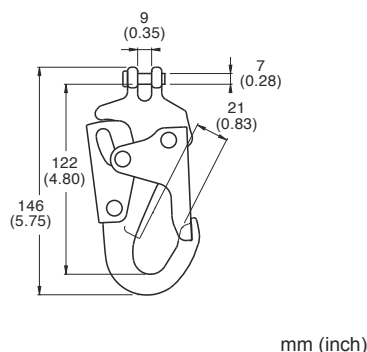

N-3618
Tie Back Snap Hook
5000 LBS gate strength


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 16.0 oz. / 454 g.

yellow zinc

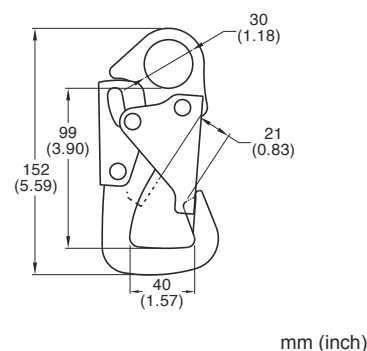

N-3658
Pole Strap Snap Hook
3600 LBS gate strength


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 17.8 oz. / 506 g
yellow zinc

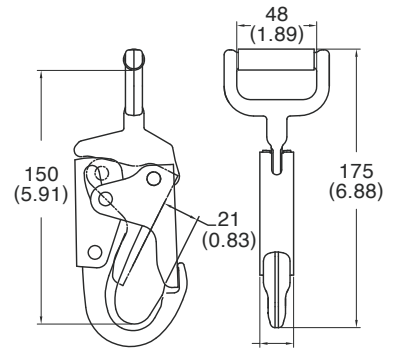

mm (inch)

N-3660
Spreader Snap Hook
3600 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 ● EN 362 : 2004
 Net weight : 25.4 oz. / 728 g
yellow zinc

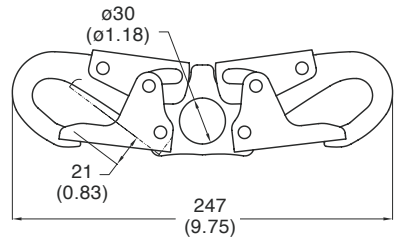


mm (inch)

**N-3032
Snap Hook**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 10.6 oz. / 303 g.

yellow zinc




mm (inch)

**N-3027
Snap Hook**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 9.4 oz. / 267 g.

yellow zinc

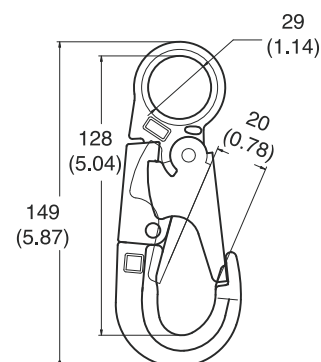


mm (inch)

**N-3029
Snap Hook**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 9.7 oz. / 275 g.

yellow zinc

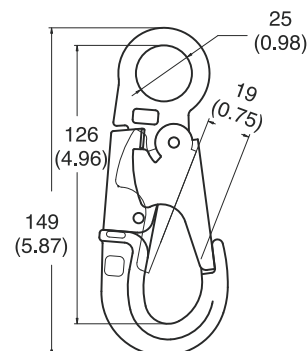


mm (inch)

**N-3033
Snap Hook**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 9.7 oz. / 276 g.

yellow zinc




mm (inch)

N-304
Stamped Rebar Hook

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 18.7 oz. / 530 g


yellow zinc

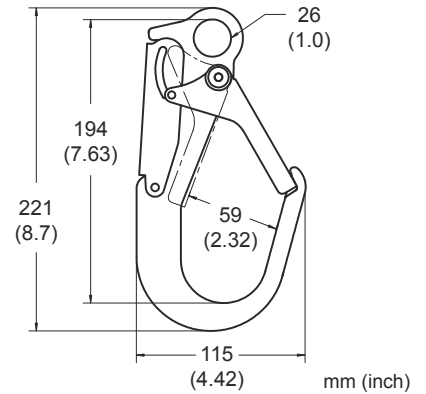

N-305
Stamped Snap Hook

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 5.9 oz. / 168 g.


yellow zinc

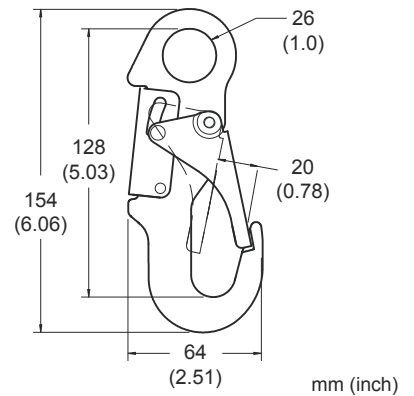

N-306
Stamped Snap Hook

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 9.7 oz. / 275 g.



yellow zinc

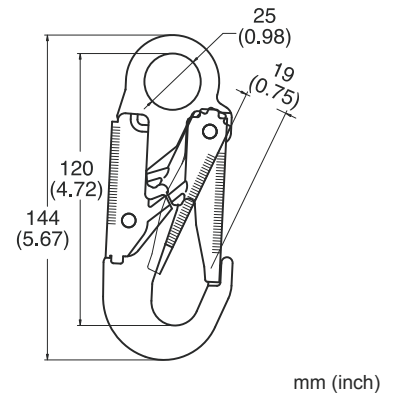

N-315
Stamped Snap Hook

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 8.4 oz. / 239 g.

yellow zinc

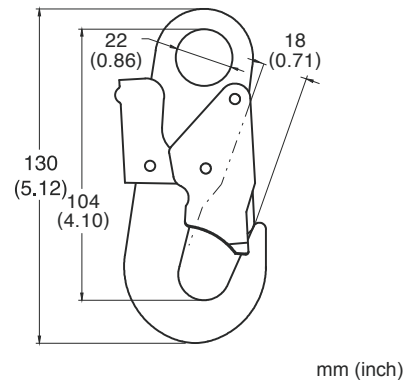


N-3167
Indicator Swivel Snap Hook


Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 13.2 oz. / 377 g

New

yellow zinc



Indicator activation

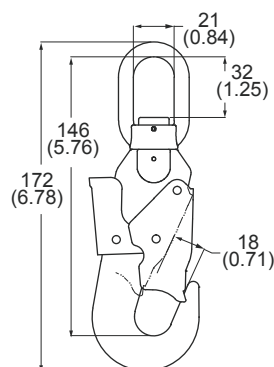


mm (inch)

N-3167/0
Swivel Snap Hook

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 12.9 oz. / 368 g

New

yellow zinc

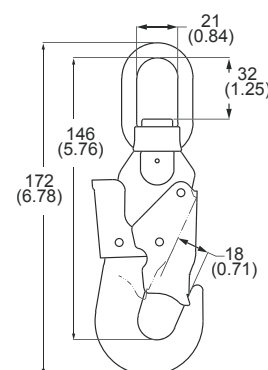


mm (inch)

N-3155
Stamped Snap Hook

Sheet steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN362 : 2004
Net weight : 8.8 oz. / 250 g

yellow zinc

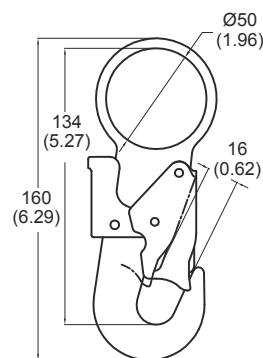


mm (inch)

N-315X
Stamped Snap Hook

Sheet steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN362 : 2004
Net weight : 7.1 oz. / 200 g


yellow zinc



mm (inch)

N-3056
Stamped Snap Hook

Sheet steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN362 : 2004
 Net weight : 9.0 oz. / 256 g




mm (inch)

yellow zinc

N-3161
Rope Snap Hook

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 9.4 oz. / 268 g



mm (inch)


yellow zinc

N-3035
Indicator Swivel Hook

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 13.9 oz. / 394 g



Indicator activation

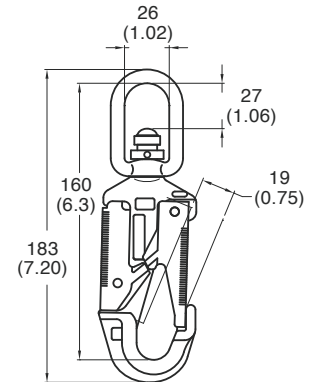


mm (inch)

yellow zinc

N-3035/0
Swivel Hook (non - Indicator)

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 12.9 oz. / 366 g

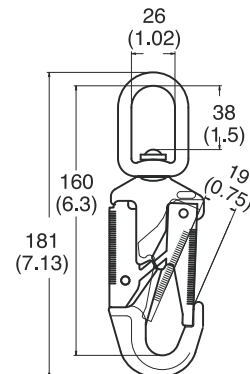


mm (inch)

yellow zinc

N-314-MX
Rebar Hook
Designed for 2" or small rebar

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN362 : 2004
 Net weight : 17.6 oz. / 500 g.

zinc plated, matt

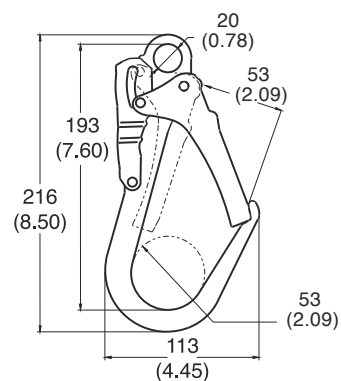

mm (inch)

Part Number

Finish

N-314-ZP


Zinc Plated, Polished

N-314-MX

Zinc Plated, Matte

N-314-YW

Yellow Zinc Plated, Matte

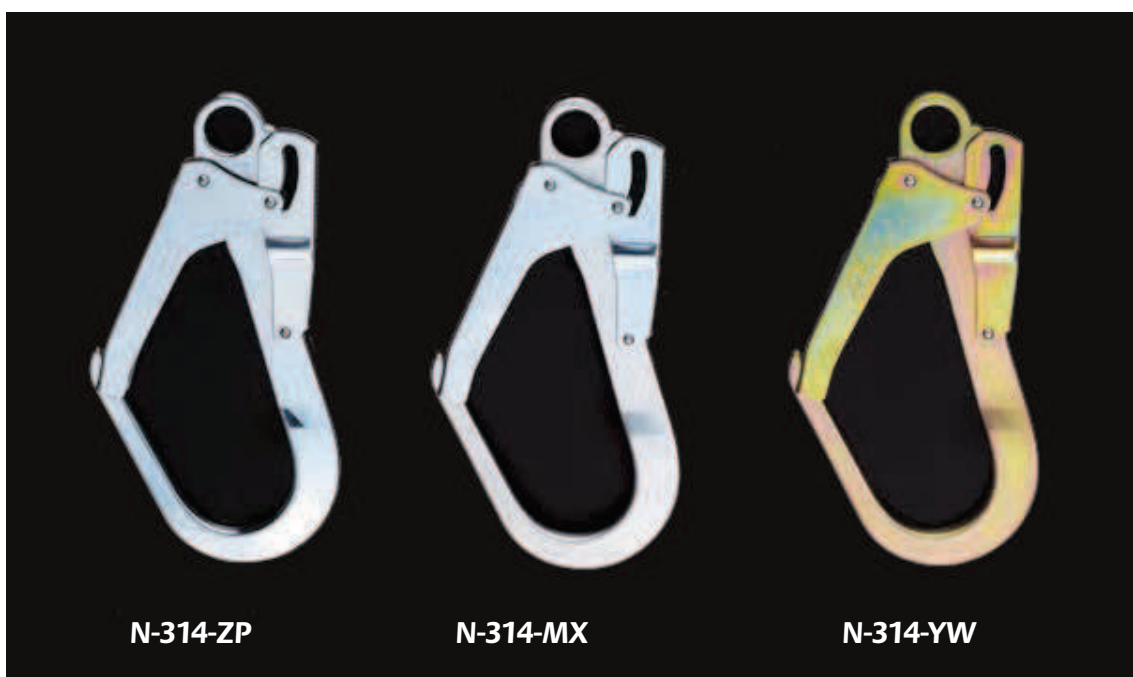

N-314-ZP


N-314-MX

N-314-YW

N-318
Rebar Hook
Designed for 1-3/4" rebar

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 17.5 oz. / 495 g.

yellow zinc




mm (inch)

N-326
Rebar Hook
Designed for 2-1/4" rebar

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 20.6 oz. / 594 g.

yellow zinc

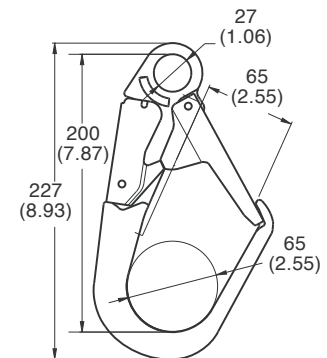


mm (inch)

N-325/0
Swivel Rebar Hook
Designed for 2-1/4" rebar
(non-indicator)

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 24.0 oz. / 680 g.



yellow zinc

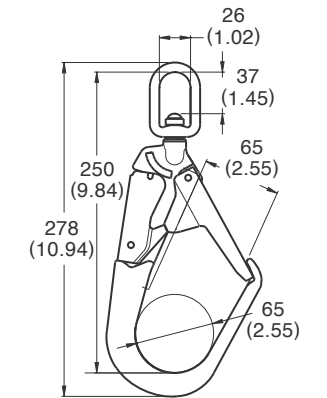

mm (inch)

N-360
Large Capacity Rebar Hook


Steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 29.8 oz. / 846 g

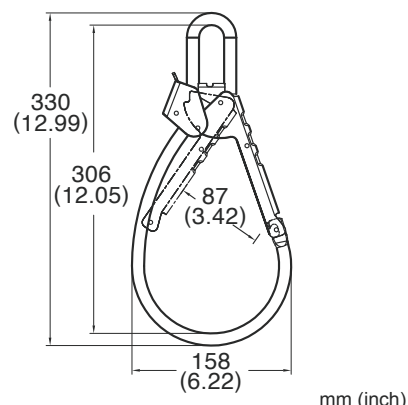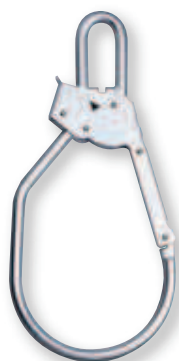

zinc plated

N-3036
Clevis Snap Hook


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 11.5 oz. / 328 g.

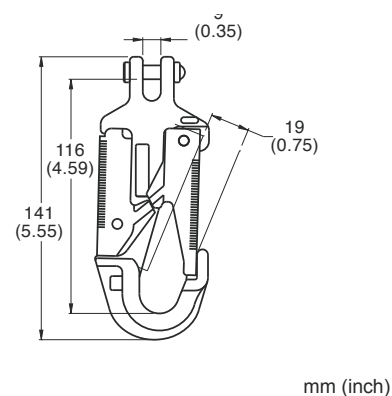

yellow zinc

N-3031
Single Latch Hook



Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 8.8 oz. / 249 g.

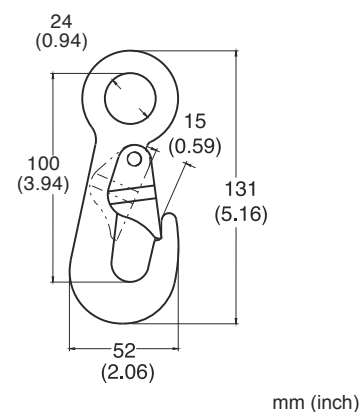

yellow zinc

**N-3058
Pole Strap Snap Hook**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 14.1 oz. / 396 g

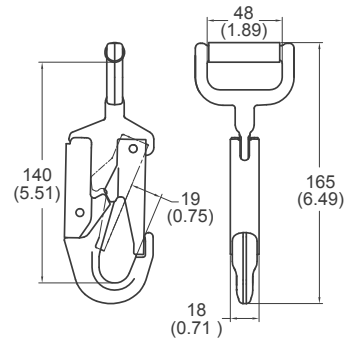


mm (inch)

yellow zinc

**N-3059
Pole Strap Snap Hook**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 15.5 oz. / 454 g

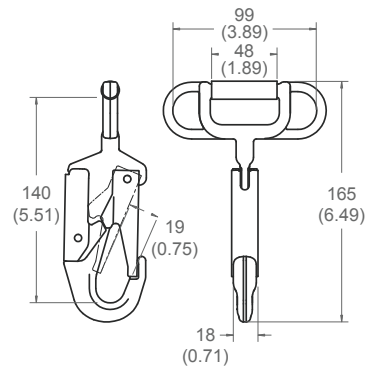


mm (inch)

yellow zinc

**N-3049
Safety Pole Strap Snap**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 11.4 oz. / 324 g

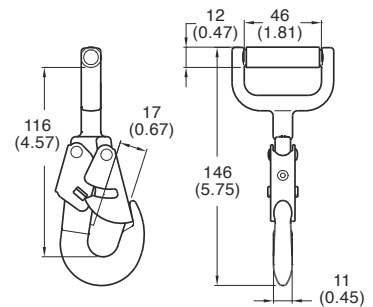


mm (inch)

yellow zinc

**N-3040
Pole Strap Snap Hook**

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 4.1 oz. / 115 g.




yellow zinc

mm (inch)

**N-3040-1
Pole Strap Snap Hook
With Wing Keeper**

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 4.0 oz. / 115 g.




yellow zinc

mm (inch)

**N-3041
Pole Strap Snap Hook
With Wing Keeper**

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 10.9 oz. / 310 g.

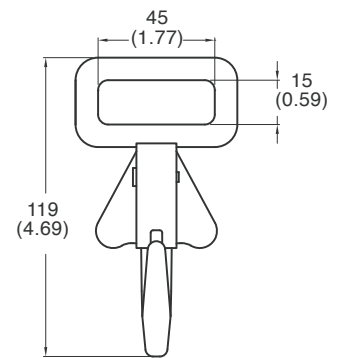


yellow zinc

mm (inch)

**N-3039
Adjustable Slide Pole Hook**

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 6.0 oz. / 170 g.

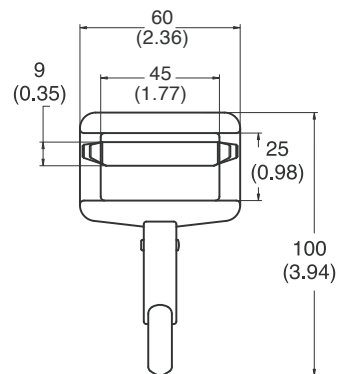

yellow zinc


mm (inch)

YOKE



**N-416L
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs/23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.2 oz. /120 g.

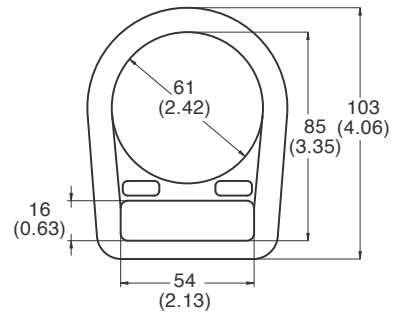


yellow zinc

Light Weight Designed

mm (inch)

**N-416L-R
Roller D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs/ 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.3 oz. / 122 g.

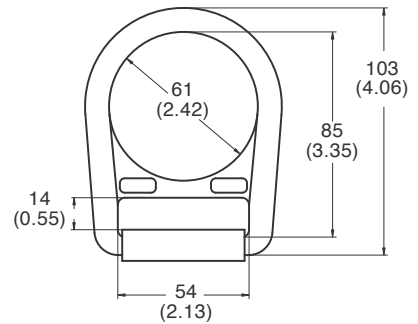


yellow zinc

mm (inch)

**N-416
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.0 oz. / 142 g.

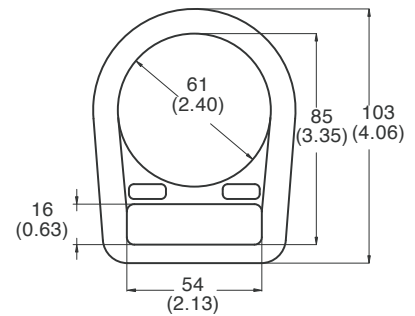


yellow zinc

mm (inch)

**N-416R
Roller D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.1 oz. / 146 g.

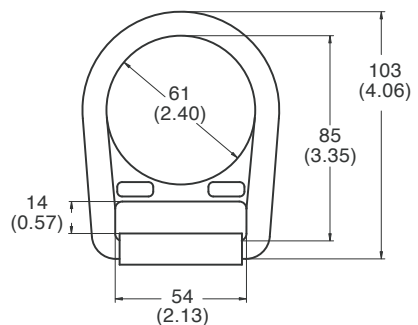


yellow zinc

mm (inch)

**N-414
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.1 oz. / 145 g.

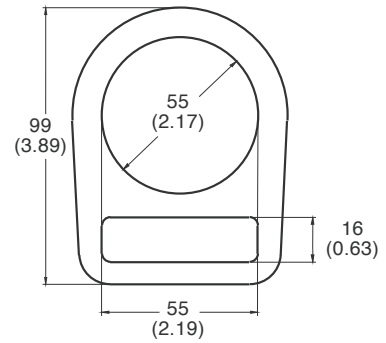


mm (inch)

yellow zinc

**N-414R
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.2 oz. / 149 g.

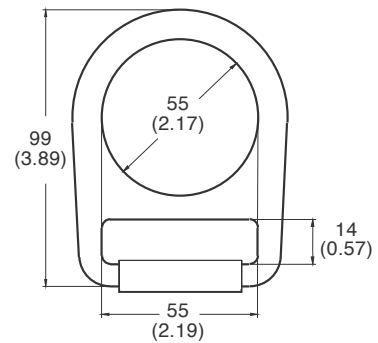


mm (inch)

yellow zinc

**N-409
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 8.4 oz. / 228 g.

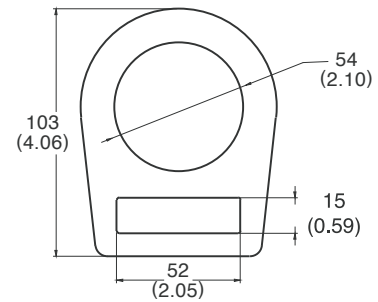


mm (inch)

yellow zinc

**N-418
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.8 oz. / 112 g.


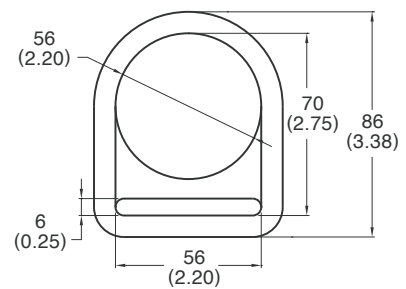


mm (inch)

yellow zinc

**N-415
Stamped D-Ring**



Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.0 oz. / 142 g.

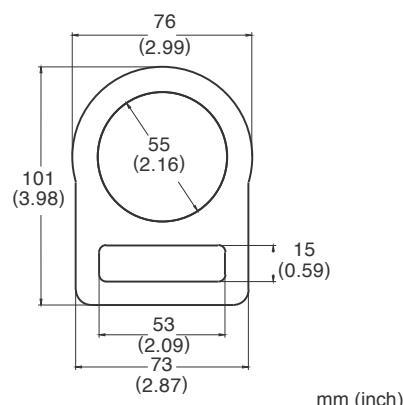

yellow zinc

**N-415R
Roller Stamped D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.1 oz. / 145 g.

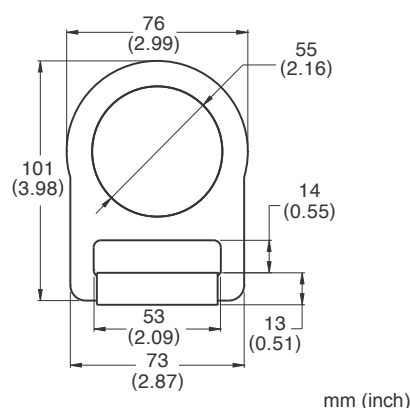

yellow zinc

**N-419
Stamped D-Ring**



Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.8 oz. / 136 g.

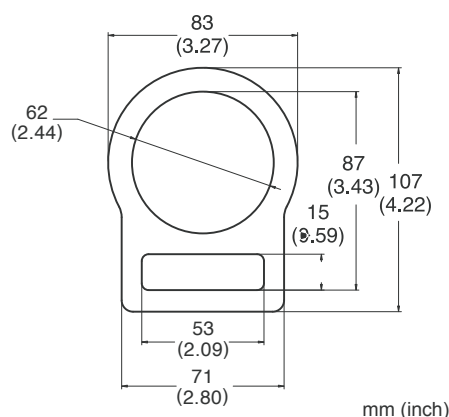

yellow zinc

**N-419R
Roller Stamped D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.0 oz. / 142 g.

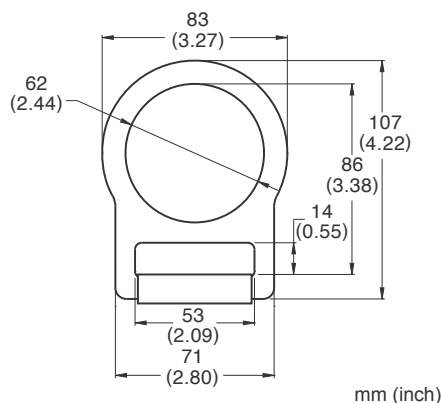

yellow zinc

**N-415X
Stamped D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.5 oz. / 100 g.

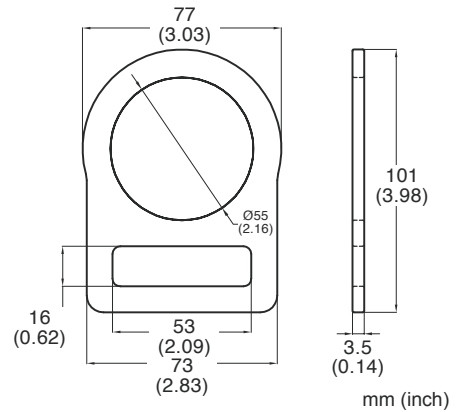

yellow zinc

**N-477
Stamped Bent D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.8 oz. / 138 g.

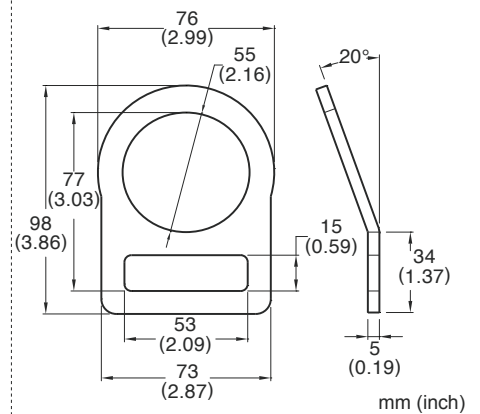

yellow zinc

**N-417
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 8.0 oz. / 227 g.

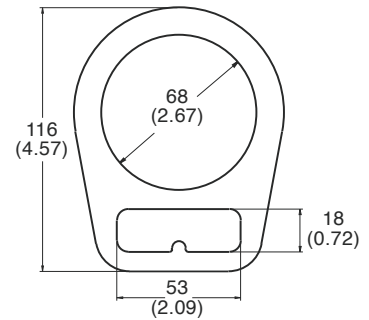


yellow zinc

mm (inch)

**N-437
Bent D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 7.9 oz. / 225 g.

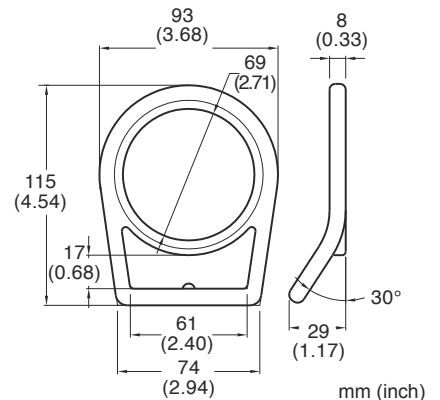


yellow zinc

mm (inch)

**N-476
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 7.9 oz. / 225 g.

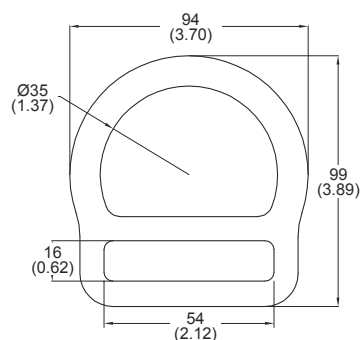


mm (inch)

yellow zinc

**N-476R
Roller D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 8.0 oz. / 227 g.

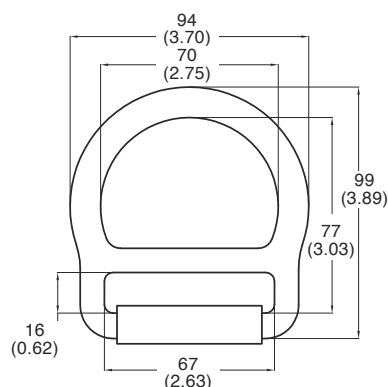


mm (inch)

yellow zinc

**N-455
Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.2 oz. / 120 g.

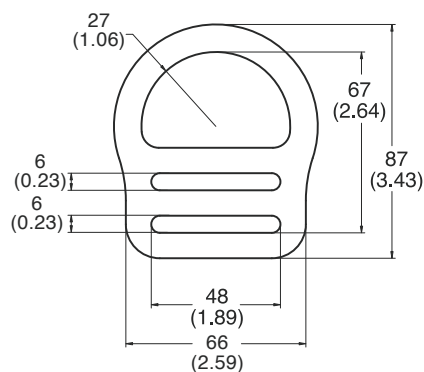

mm (inch)

yellow zinc



N-416L

N-416

N-414

N-409


N-418

N-415

N-419

**N-460
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 6.9 oz. / 180 g.

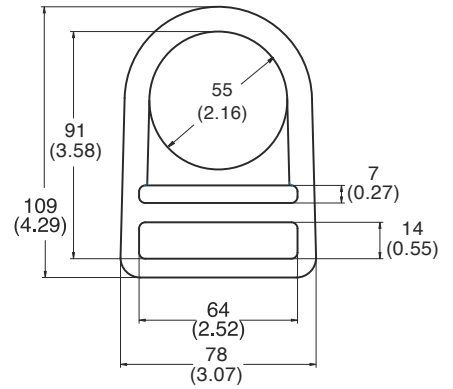


mm (inch)

yellow zinc

**N-461
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.9 oz. / 170 g

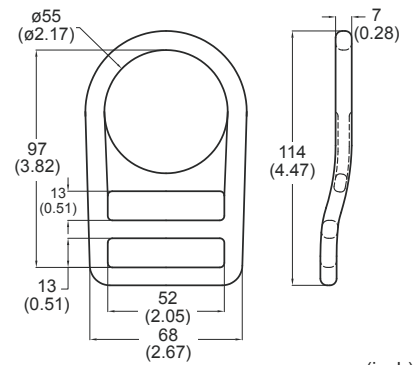


mm (inch)

yellow zinc

**N-469
D-Ring with Clip**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 9.4 oz. / 269 g

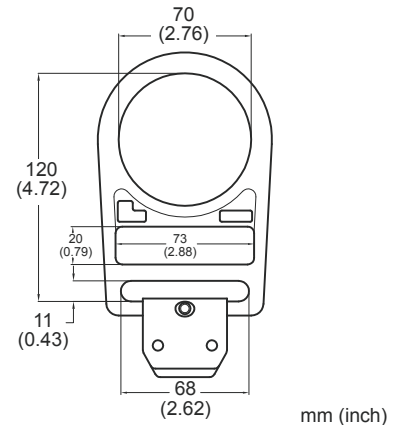


mm (inch)

yellow zinc

**N-478
Bent D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.8 oz. / 108 g.

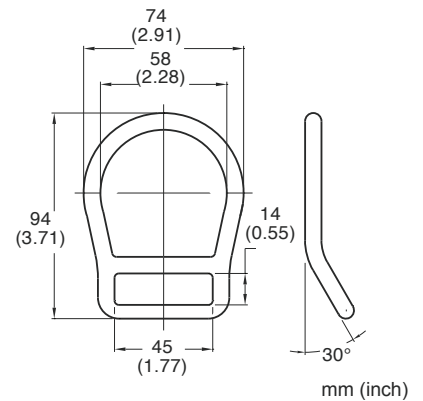


mm (inch)

yellow zinc

**N-493
Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets:
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.3 oz. / 94 g

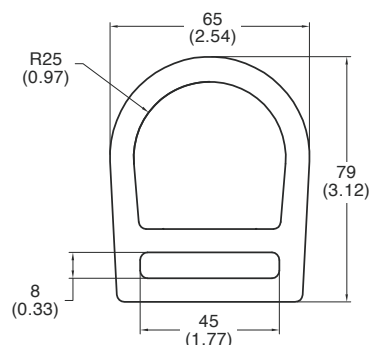


mm (inch)

yellow zinc

**N-493-BT
Stamped Bent D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets:
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.7 oz. / 77 g

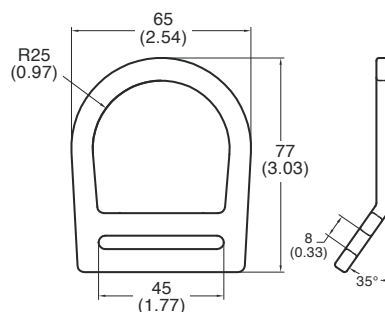


mm (inch)

yellow zinc

**N-492
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets:
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.3 oz. / 94 g




mm (inch)

yellow zinc

**N-492-BT
Bent D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets:
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.7 oz. / 77 g

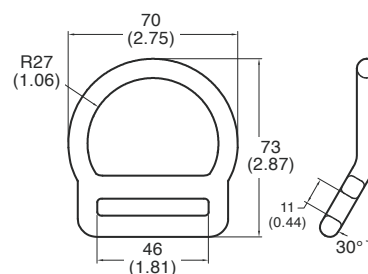


mm (inch)

yellow zinc

**N-405
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.1 oz. / 88 g.

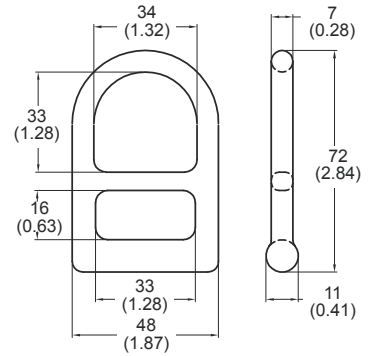


zinc plated

mm (inch)

**N-403
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.8 oz. / 80 g.

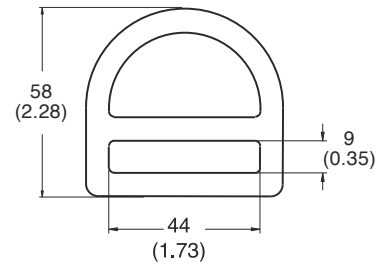


yellow zinc

mm (inch)

**N-445
Bent D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.1 oz. / 90 g.


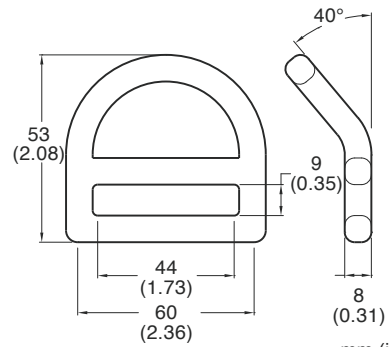


yellow zinc

mm (inch)

**N-445L
Stamped Bent D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.8 oz. / 80 g.

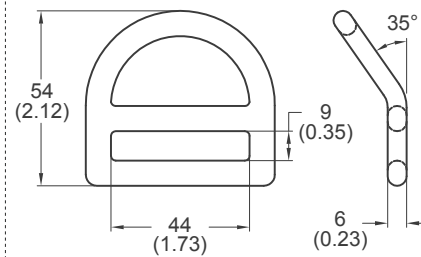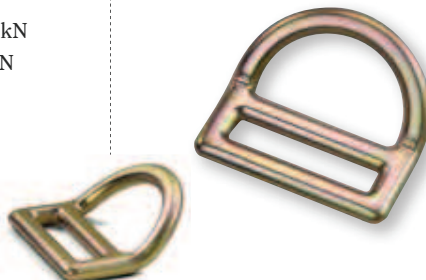


yellow zinc

mm (inch)

N-430
Stamped D-Ring, with bar

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.1 oz. / 90 g.

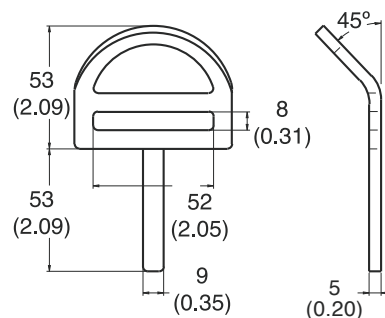


yellow zinc

mm (inch)

N-432
Stamped D-Ring

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.8 oz. / 80 g.

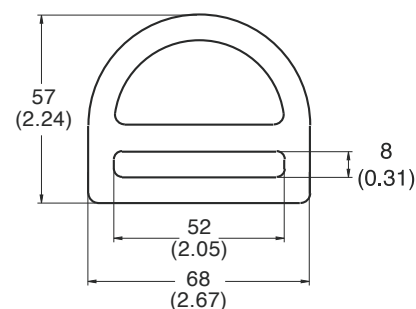


yellow zinc

mm (inch)

N-431
Stamped D-Ring, parabolic

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.8 oz. / 80 g.

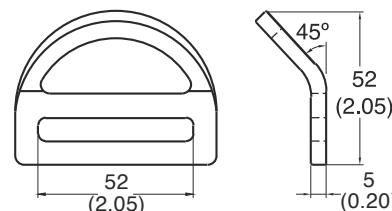


yellow zinc

mm (inch)

N-403L
Stamped D-Ring

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.8 oz. / 78 g.

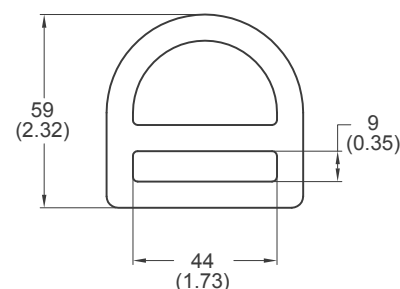


yellow zinc

mm (inch)

**N-407L
Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.8 oz. / 78 g.

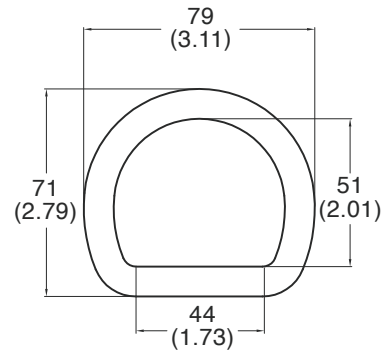


mm (inch)

yellow zinc

**N-4021L
Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.8 oz. / 80 g.

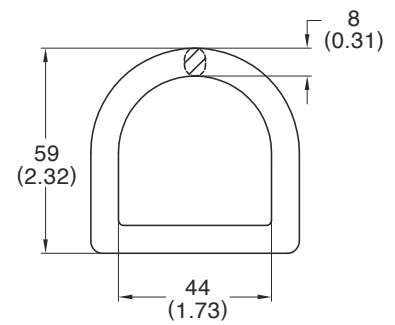


mm (inch)

yellow zinc



**N-407
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.4 oz. / 126 g.




yellow zinc

mm (inch)

**N-407R
Roller D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.5 oz. / 129 g.

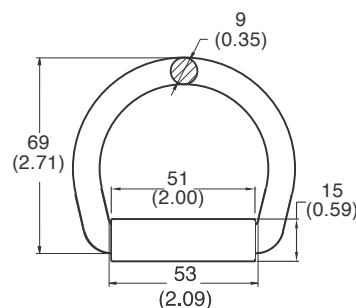


yellow zinc

mm (inch)

**N-408
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.3 oz. / 150 g.




yellow zinc

mm (inch)

**N-408R
Roller D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.4 oz. / 153 g.

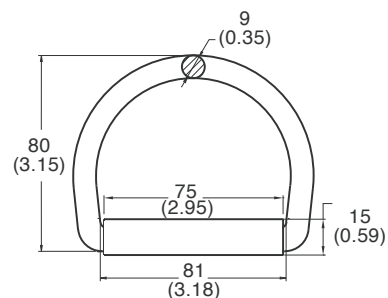


yellow zinc

mm (inch)

**N-402
D-Ring**


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.0 oz. / 86 g.



mm (inch)

**N-404
Stamped D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.5 oz. / 70 g.



mm (inch)

**N-404R
Stamped Roller D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.8 oz. / 77 g.



mm (inch)

**N-429
Delta D-Ring**


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.6 oz. / 45 g.

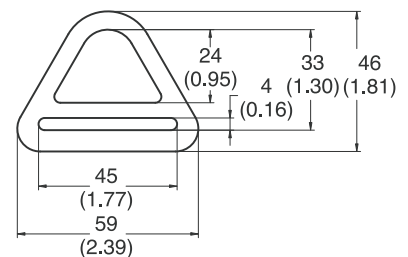

mm (inch)

**N-475
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.2 oz. / 120 g.




yellow zinc

mm (inch)

**N-449
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.1 oz. / 60 g.

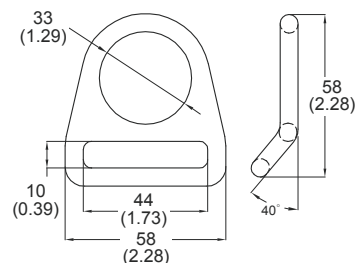


yellow zinc

mm (inch)

**N-406
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.0 oz. / 120 g.




yellow zinc

mm (inch)

**N-487
Stamped O Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.0 oz. / 57 g

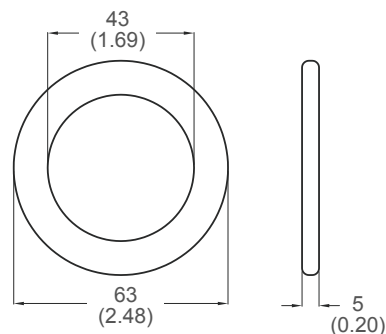


yellow zinc

mm (inch)

**N-486
O Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.1 oz. / 60 g.




mm (inch)

yellow zinc

**N-453
O Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.0 oz. / 150 g.




mm (inch)

yellow zinc

**N-483
O Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.2 oz. / 146 g.




mm (inch)

yellow zinc

**N-489
O Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 7.0 oz. / 198 g.




mm (inch)

yellow zinc

**N-422
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.0 oz. / 28 g.

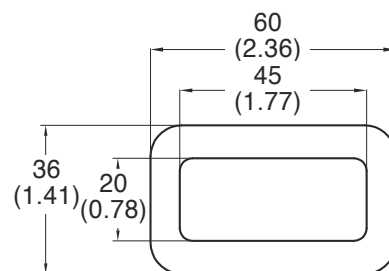


yellow zinc

mm (inch)

**N-4226
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.4 oz. / 39 g.

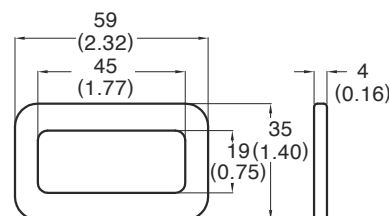


yellow zinc

mm (inch)

**N-4224
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.9 oz. / 55.2 g.

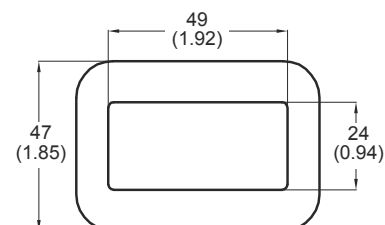


yellow zinc

mm (inch)

**N-442
Loop Adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 0.6 oz. / 17 g.

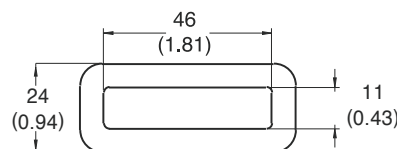


yellow zinc

mm (inch)

**N-401
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.9 oz. / 54 g.




mm (inch)

yellow zinc

*Supplied without sliding pin

**N-4011
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.3 oz. / 38 g.

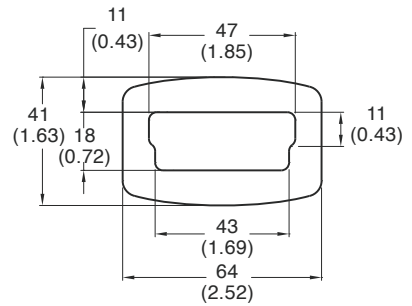


mm (inch)

yellow zinc

**N-4012
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.9 oz. / 55 g.

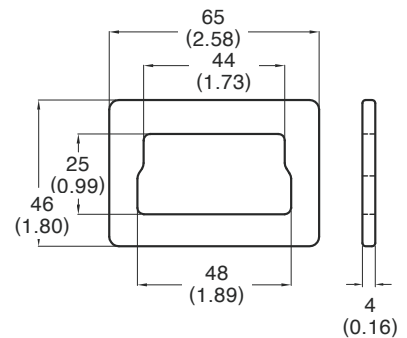


mm (inch)

yellow zinc

**N-4016
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.9 oz. / 53 g.

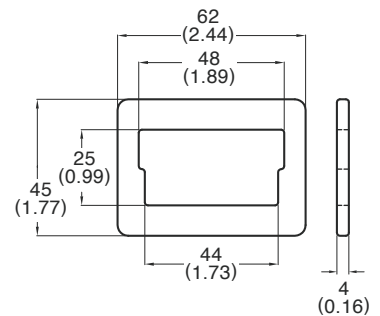


mm (inch)

yellow zinc

**N-4013
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.3 oz. / 37 g

yellow zinc

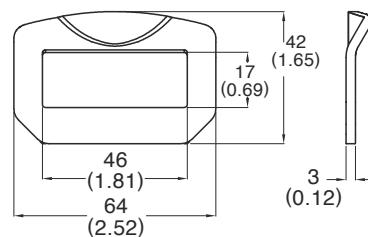


mm (inch)

**N-4014
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 0.8 oz. / 23 g

yellow zinc

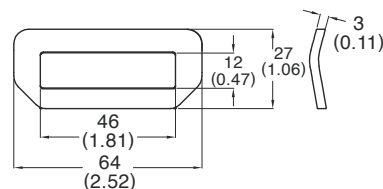


mm (inch)

**N-428
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12
 ● CSA Z259.12-11
 Net weight : 0.5 oz. / 15 g

yellow zinc

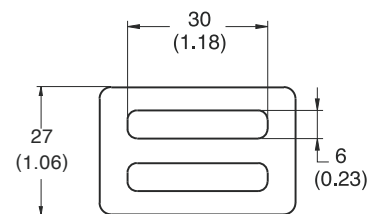


mm (inch)

**N-434
Stamped Adjuster**

Sheet steel, heat treated
 Min. Breaking Load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.4 oz. / 41 g


yellow zinc

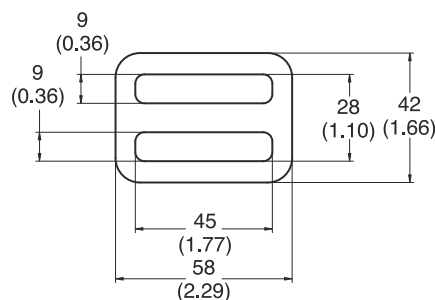

mm (inch)

**N-420
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.0 oz. / 27 g.

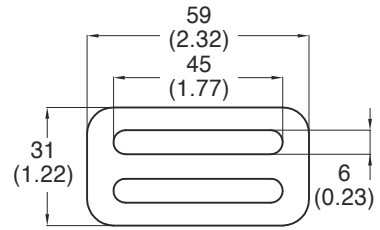


yellow zinc

mm (inch)

**N-4201
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.3 oz. / 38 g




yellow zinc

mm (inch)

**N-4206
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.4 oz. / 40 g

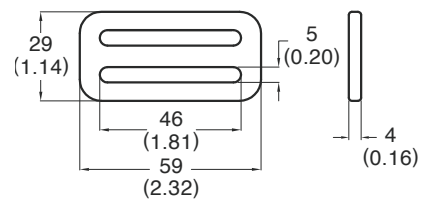


yellow zinc

mm (inch)

**N-435
Slide Buckle -Non-Rated**

Sheet stamped, heat treated
 Min. Tensile strength : 40 lbs / 0.18 kN
 Net weight : 0.5 oz. / 13 g.

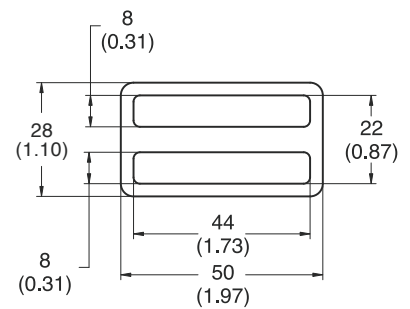


yellow zinc

mm (inch)

**N-421
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.3 oz. / 36 g.


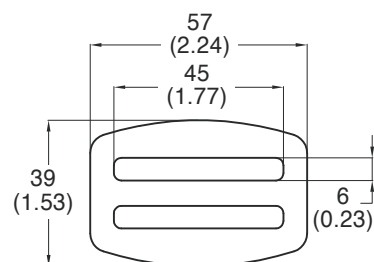


yellow zinc

mm (inch)

**N-4203
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.3 oz. / 36 g.

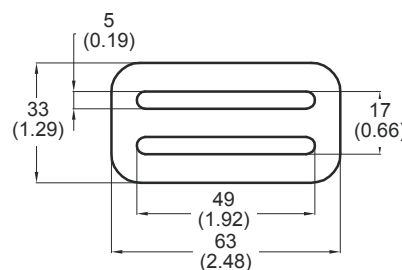


yellow zinc

mm (inch)

**N-4501
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.5 oz. / 70 g.

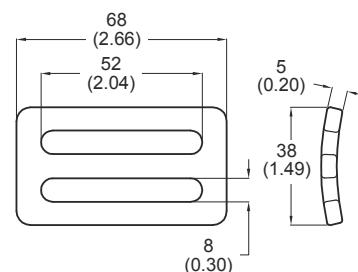


yellow zinc

mm (inch)

**N-4502
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.3 oz. / 66 g.




yellow zinc

mm (inch)

**N-4207
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.0 oz. / 28 g.

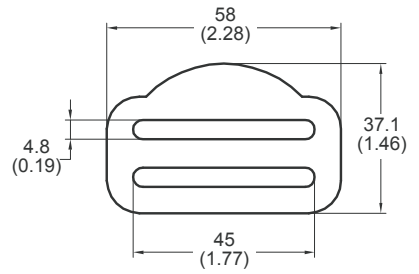


yellow zinc

mm (inch)

**N-451
Oval Adjuster**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.9 oz. / 60 g.

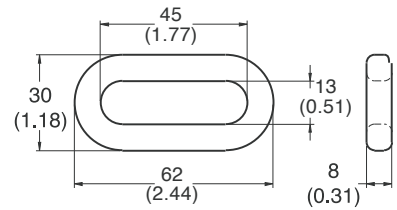


yellow zinc

mm (inch)

**N-413
Adjuster**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 6.1 oz. / 170 g.

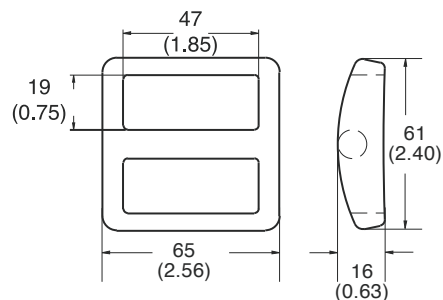


yellow zinc

mm (inch)

**N-413X
Adjuster**

Sheet steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.5 oz. / 100 g





yellow zinc

mm (inch)

**N-4135
Adjuster**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.9 oz. / 110 g.

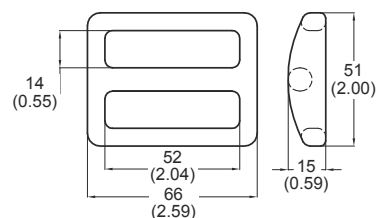


yellow zinc

mm (inch)

**N-436
Quick Buckle**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.3 oz. / 65 g.

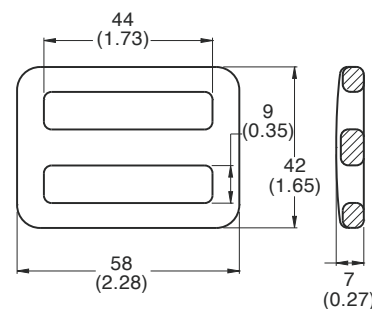


yellow zinc

mm (inch)

**N-452
Adjuster**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.6 oz. / 46 g.

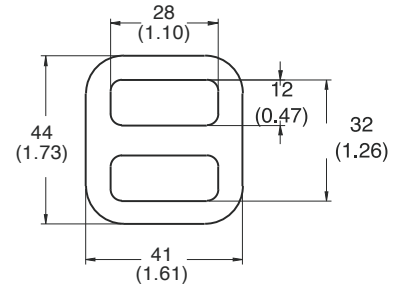


yellow zinc

mm (inch)

**N-452L
Stamped Adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.9 oz. / 53 g.

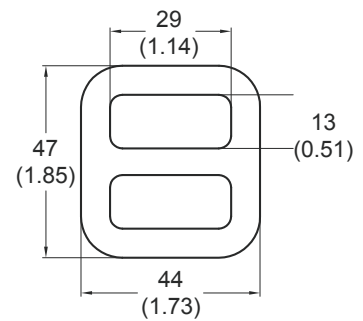


yellow zinc

mm (inch)

**N-433
Adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.4 oz. / 95 g


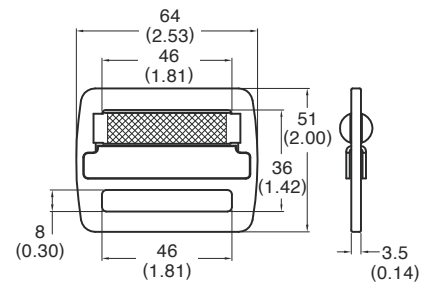


yellow zinc

mm (inch)

**N-433L
Adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.2 oz. / 90 g

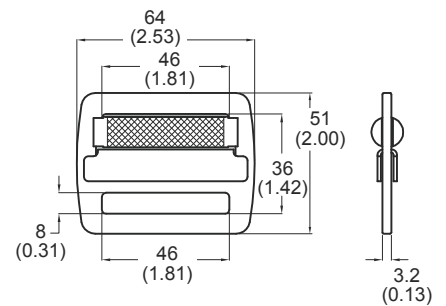


yellow zinc

mm (inch)

**N-448
Offset Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.8 oz. / 51 g.

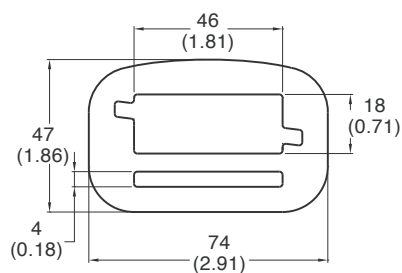


yellow zinc

mm (inch)

**N-423
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.8 oz. / 51 g.




yellow zinc

mm (inch)

**N-424
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12
 ● CSA Z259.12-11
 Net weight : 1.2 oz. / 35 g.




yellow zinc

mm (inch)

**N-4237
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.8 oz. / 50 g.

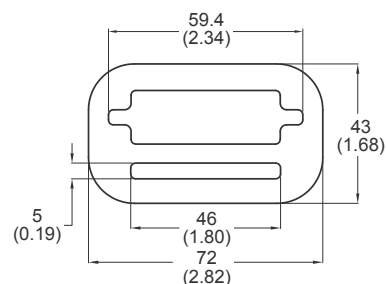


yellow zinc

mm (inch)

**N-412
Adjuster**

Forged steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.1 oz. / 88 g.

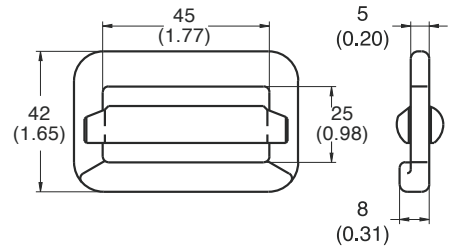


yellow zinc

mm (inch)

**N-4910
Adjuster Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 0.9 oz. / 28 g

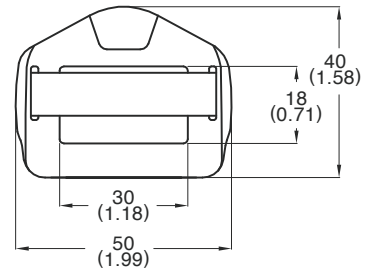


ED Black

mm (inch)

**N-4911
Adjuster Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.5 oz. / 45 g


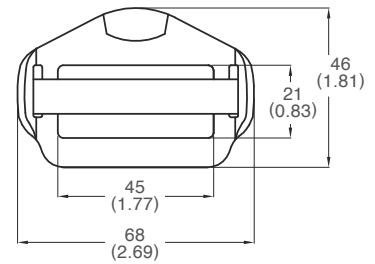


ED Black

mm (inch)

**N-443
Adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.8 oz. / 50 g

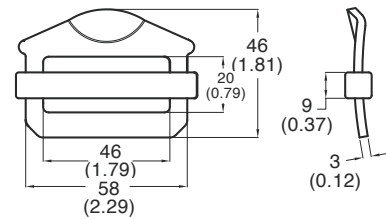


yellow zinc

mm (inch)

**N-400
Adjuster**

Sheet steel, heat treated
 Min. Breaking Load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.3 oz. / 93 g.

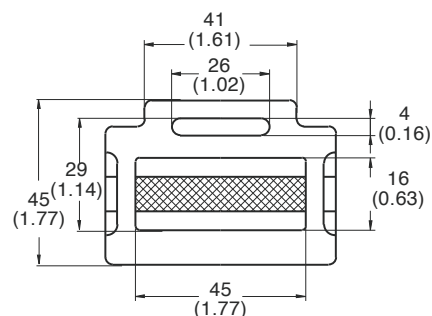


mm (inch)

yellow zinc

**N-400/S
Adjuster with spring**

Sheet steel, heat treated
 Min. Breaking Load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.4 oz. / 96 g.


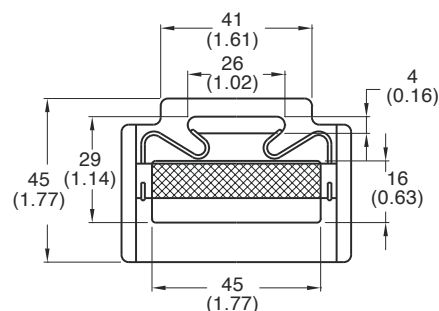


mm (inch)

yellow zinc

**N-4001
Adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.8 oz. / 80 g.

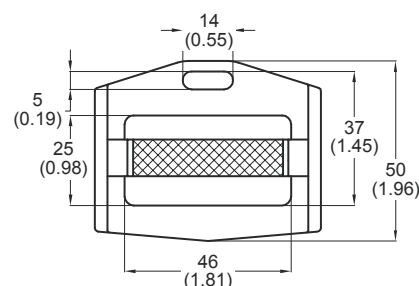


mm (inch)

yellow zinc

**N-411
Adjuster D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.2 oz. / 118 g.

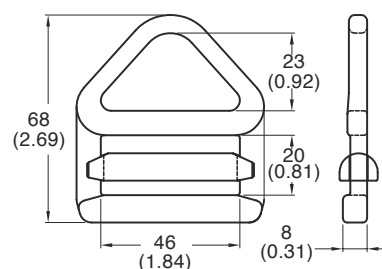

mm (inch)



yellow zinc

N-4335

**Bent Adjuster Buckle
with sliding bar adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets : ANSI Z359.12-09 CSA Z259.12-11
 Net weight : 2.8 oz. / 78 g.

Art No. N-4335/0 yellow zinc
 Bent Adjuster Buckle
 without sliding bar adjuster

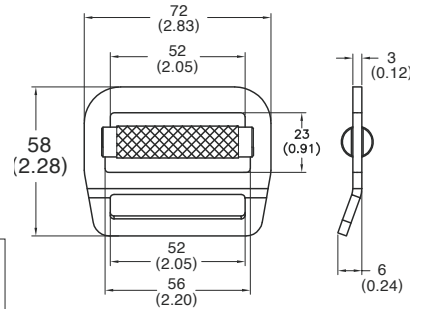


mm (inch)

N-425

**Adjuster Buckle
with sliding bar adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets : ANSI Z359.12-09 CSA Z259.12-11
 Net weight : 2.4 oz. / 67 g.

Art No. N-425/0 yellow zinc
 Adjuster Buckle only.
 without sliding bar adjuster

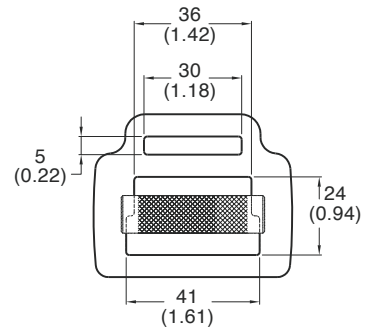



mm (inch)

N-426

**Adjuster Buckle
with sliding bar adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets : ANSI Z359.12-09 CSA Z259.12-11
 Net weight : 3.1 oz. / 88 g.

Art No. N-426/0 yellow zinc
 Adjuster Buckle only.
 without sliding bar adjuster

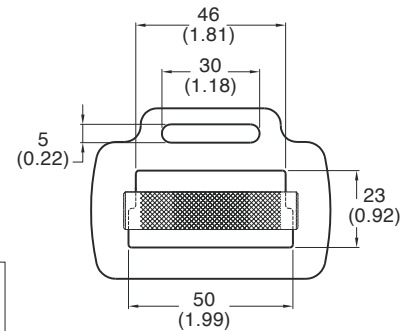


mm (inch)

N-427

**Adjuster Buckle
with sliding bar adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets : ANSI Z359.12-09 CSA Z259.12-11
 Net weight : 3.2 oz. / 90 g.

Art No. N-427/0 yellow zinc
 Adjuster Buckle only.
 without sliding bar adjuster

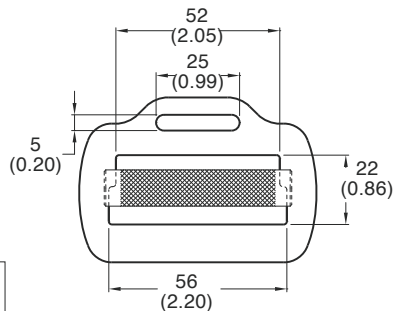

mm (inch)



N-4797
Extra Lock QR Buckle

Sheet steel, heat treated
 Min. Breaking Load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.5 oz. / 156 g

Patent Pending

New


yellow zinc

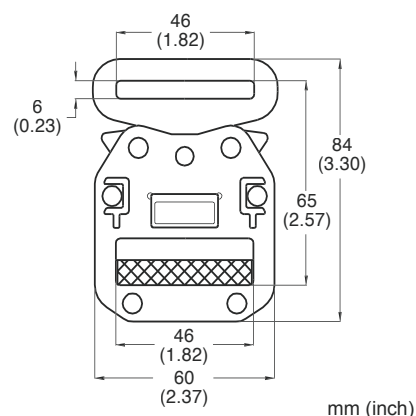

N-479
QRA Buckle
(Adjust Buckle)

Sheet steel, heat treated
 Min. Breaking Load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.5 oz. / 127 g.


yellow zinc

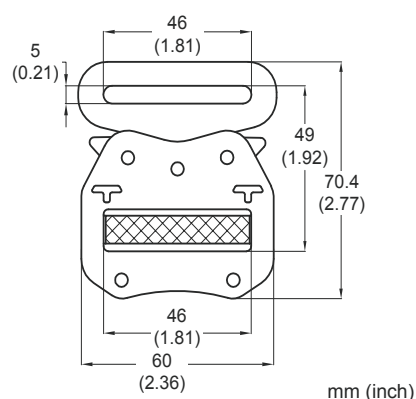

N-438
Safety Buckle
with bayonet catch



Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 6.3 oz. / 180 g.

yellow zinc

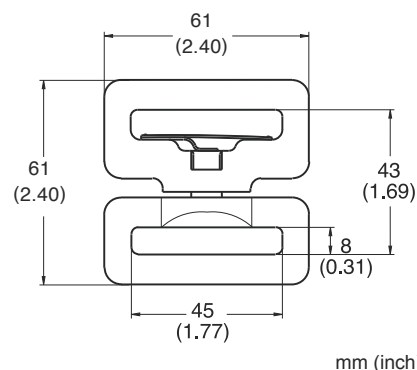

N-439X
Stamped Tongue Buckle
1-7/8"

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.7 oz. / 78 g.

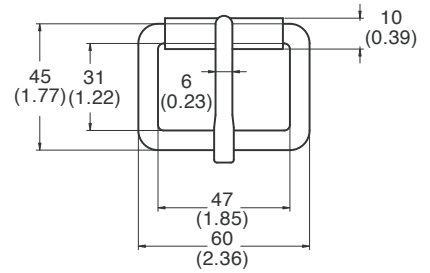


yellow zinc

mm (inch)

N-439
Tongue Buckle, 1-7/8"

Forged steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.5 oz. / 99 g.

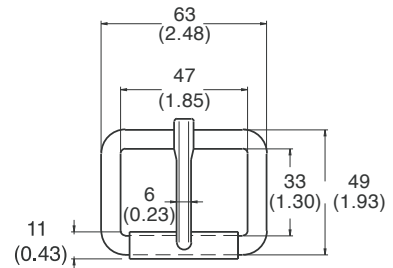


yellow zinc

mm (inch)

N-441
Tongue Buckle, 2"

Forged steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.3 oz. / 96 g.

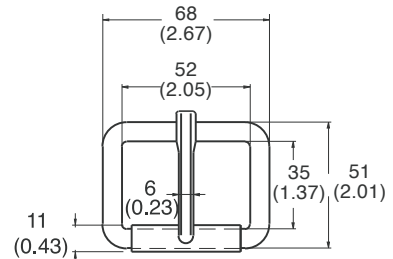


yellow zinc

mm (inch)

N-440
Twin Tongue Buckle, 2"

Forged steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.0 oz. / 115 g.

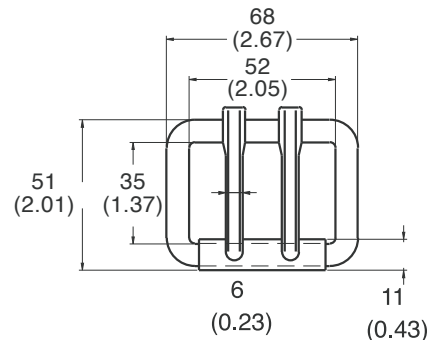

yellow zinc


mm (inch)



**N-DE001
Dielectric D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600lbs/ 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Minimum 9kV Dielectric Resistance.
 Net weight : 5.8 oz. / 164 g

plastic molding

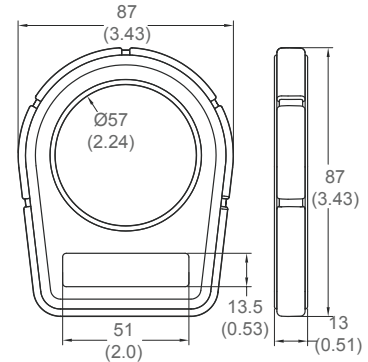


mm (inch)

**N-DE002
Dielectric Bent D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600lbs/ 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Minimum 9kV Dielectric Resistance.
 Net weight : 6.1 oz. / 176 g

plastic molding

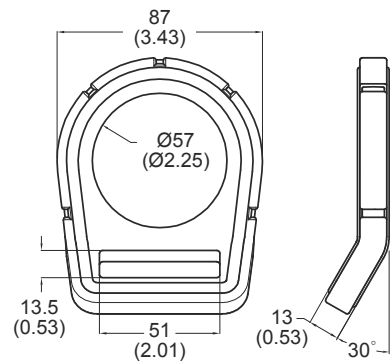


mm (inch)

**N-DE005
Dielectric Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Minimum 9kV Dielectric Resistance.
 Net weight : 1.6 oz. / 45 g

plastic molding

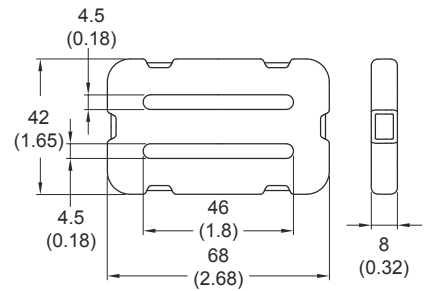


mm (inch)

**N-DE006
Dielectric Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Minimum 9kV Dielectric Resistance.
 Net weight : 2.2 oz. / 61 g


plastic molding

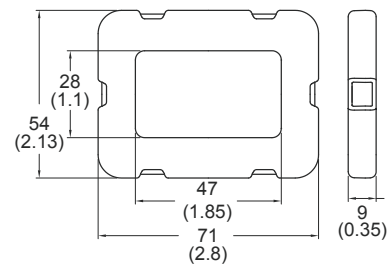

mm (inch)

N-DE007
Dielectric Quick Release Buckle

Sheet steel, heat treated




Minimum 9kV Dielectric Resistance

Net weight : 4.5 oz. / 128 g

Patent Pending

New

plastic molding

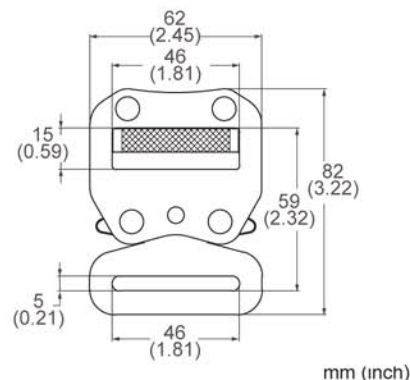

N-DE360
Dielectric ANSI Rope Snap Hook

Sheet steel, heat treated

100% proof loaded to 3600 lbs / 16kN

Min. Breaking load : 5000 lbs / 23 kN

Meets:


- ANSI Z359.12-09 *Patent Pending*
- CSA Z259.12-11
- EN 362 : 2004

Minimum 9kV Dielectric Resistance

Net weight : 14.2 oz. / 404 g

plastic molding

New



N-DE301
Dielectric Rebar Hook

Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :


- EN362 : 2004

Minimum 9kV Dielectric Resistance

Net weight : 19.2 oz. / 548g

Patent Pending

plastic molding

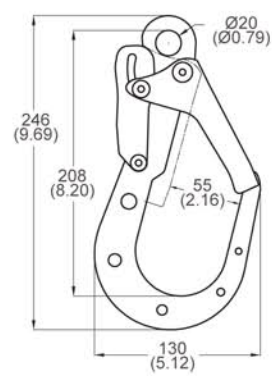

N-DE300
Dielectric Snap Hook

Sheet steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets:


- EN362 : 2004

Minimum 9kV Dielectric Resistance

Net weight : 9.2 oz. / 264 g


Patent Pending

plastic molding



N-4209-PVC
Quick Buckle, PVC Coated

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.2 oz. / 35 g




PVC coated

mm (inch)

N-4229-PVC
Quick Buckle, PVC Coated

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.7 oz. / 49 g




PVC coated

mm (inch)

N-402-PVC
D-Ring, PVC Coated

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.9 oz. / 82 g




PVC coated

mm (inch)

N-403-PVC
D-Ring, PVC Coated

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.3 oz. / 93 g

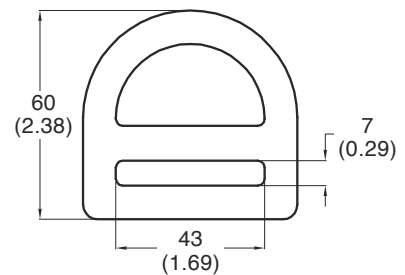


PVC coated

mm (inch)

N-415-PVC
Stamped D-Ring, PVC Coated

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.5 oz. / 158 g

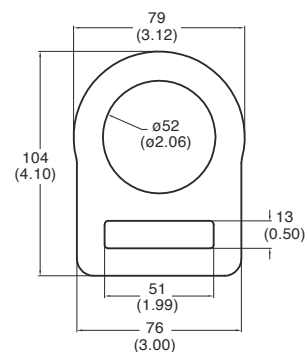


mm (inch)

PVC coated

N-416L-PVC
D-Ring, PVC Coated

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.1 oz. / 146 g




mm (inch)

PVC coated

N-419-PVC
Stamped D-Ring, PVC Coated

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.5 oz. / 156 g

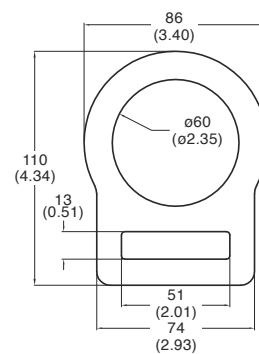


mm (inch)

PVC coated

N-477-PVC
Stamped Bent D-Ring, PVC Coated

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.4 oz. / 153 g



mm (inch)

PVC coated




**N-460-PVC
D-Ring, PVC Coated**

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-09
- CSA Z259.12-11

Net weight : 6.8 oz. / 193 g



PVC coated

mm (inch)



N-5271T
Aluminum Rebar Hook
3600 LBS gate strength


Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets:

- ANSI Z359.12-09
- CSA Z259.12-11
- EN 362 : 2004

Net weight : 22.3 oz. / 637 g
 *Standard Publication Year TBA

New

anodized black

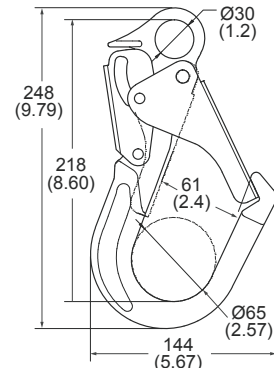


mm (inch)

N-5271
Aluminum Rebar Hook
3600 LBS gate strength

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :

- ANSI Z359.12-09
- CSA Z259.12-11
- EN 362 : 2004

Net weight : 21.8 oz. / 622 g
 anodized clear

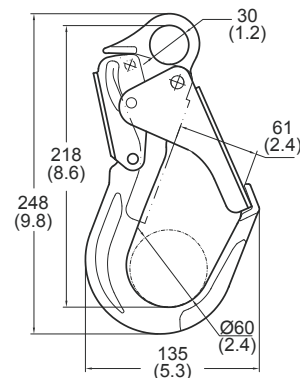


mm (inch)

N-5261
Aluminum Snap Hook
3600 LBS gate strength

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :

- ANSI Z359.12-09
- CSA Z259.12-11
- EN 362 : 2004

Net weight : 8.7 oz. / 247 g
 anodized clear



mm (inch)

N-502
Aluminum Snap Hook

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :

- ANSI Z359.1
- EN 362 : 2004

Net weight : 6.7 oz. / 189 g

anodized clear




N-502-1
Blue



N-502-2
Green



N-502-3
Red

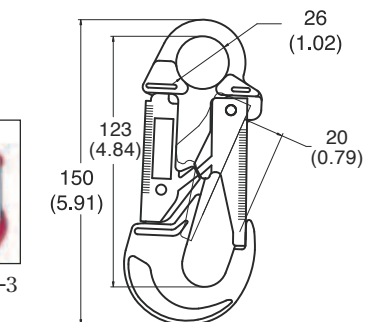

mm (inch)

Aluminum Components



N-500

Aluminum Rebar Hook

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.1
- EN 362 : 2004

Net weight : 18 oz. / 520 g.

anodized clear

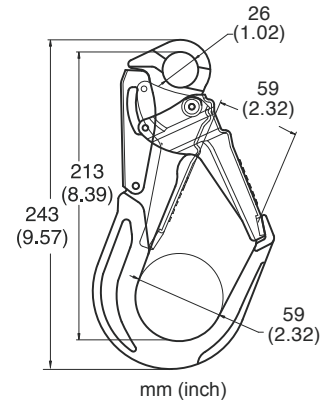

N-501

Aluminum Rebar Hook

Forged aluminum alloy


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 16.2 oz. / 460 g.

anodized clear

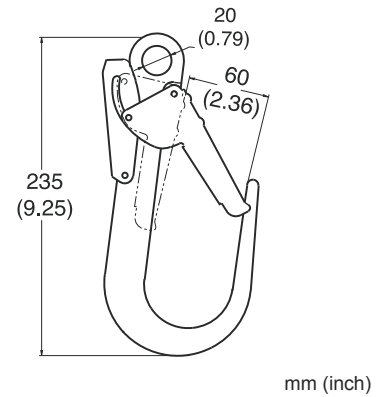

N-50130

Aluminum Rebar Hook

Forged aluminum alloy



Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004


Net weight : 16.8 oz. / 480 g.

anodized clear

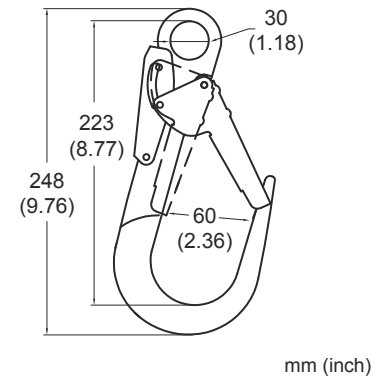

**N-501110
Aluminum Huge Rebar Hook**

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.1
 ● EN 362 : 2004
 Net weight : 32.8 oz. / 930 g.

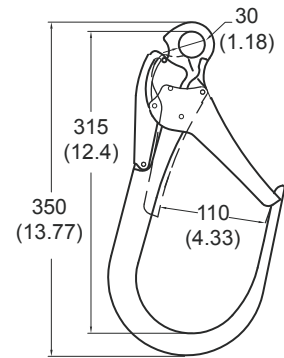


mm (inch)

anodized clear

**N-501110X
Aluminum Huge Rebar Hook**

Forged aluminum alloy
 Min. Breaking load : 4500 lbs / 20 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 32.8 oz. / 930 g.

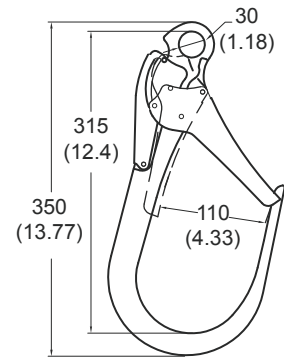


mm (inch)

anodized clear

**N-5246
Aluminum Snap Hook**

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 6.0 oz. / 169 g.




mm (inch)

anodized clear

**N-5248
Aluminum Snap Hook**

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 8.5 oz. / 244 g.



mm (inch)

anodized clear

Aluminum Components

YOKE®

N-503


Aluminum Snap Hook

Forged aluminum alloy

Min. Breaking load : 5000 lbs / 23 kN

Meets EN 362 : 2004

Net weight : 4.5 oz. / 130 g.



mm (inch)

anodized clear

N-5032



Aluminum Snap Hook

Forged aluminum alloy

Mini. Breaking load : 5000 lbs / 23 kN

Meets EN 362 : 2004

Net weight : 4.6 oz. / 134 g.

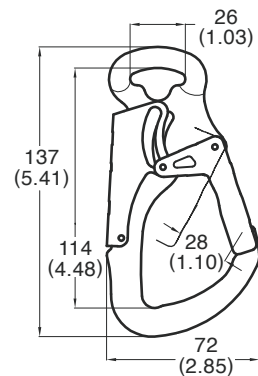

mm (inch)

anodized clear

N-5035




Aluminum Indicator Swivel Snap Hook

Forged aluminum alloy

Min. Breaking load : 5000 lbs / 23 kN

Meets EN 362 : 2004

Net weight : 6.4 oz. / 184 g.

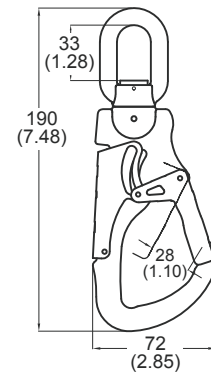

mm (inch)

anodized clear

N-5035/0


Aluminum Swivel Snap Hook

Forged aluminum alloy

Min. Breaking load : 5000 lbs / 23 kN

Meets EN 362 : 2004

Net weight : 6.3 oz. / 180 g.

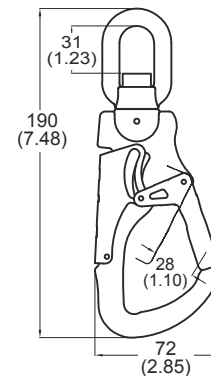


mm (inch)

anodized clear

N-5265
Alum Indicator Swivel Snap Hook

3600 LBS gate strength
 Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets:
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 10.6 oz. / 304 g

anodized clear

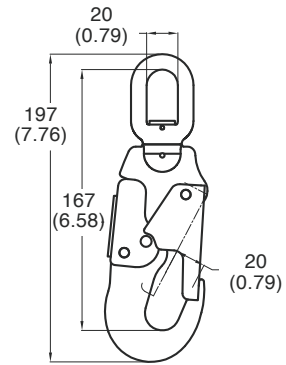


mm (inch)

N-5265/0
Aluminum Swivel Snap Hook

3600 LBS gate strength
 Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets:
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 10.5 oz. / 300 g

anodized clear

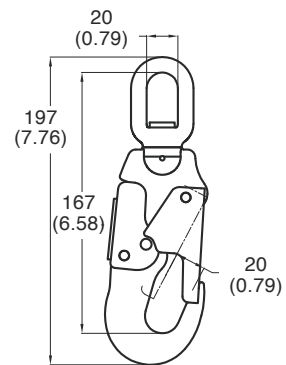


mm (inch)

N-504
Aluminum Snap Hook

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 5.5 oz. / 158 g

anodized clear




mm (inch)

N-540
Aluminum D-Ring

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.0 oz. / 114 g


anodized clear

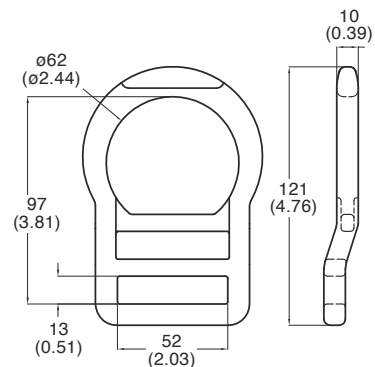

mm (inch)

N-518 Aluminum D-Ring


Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 2.7 oz. / 76 g.

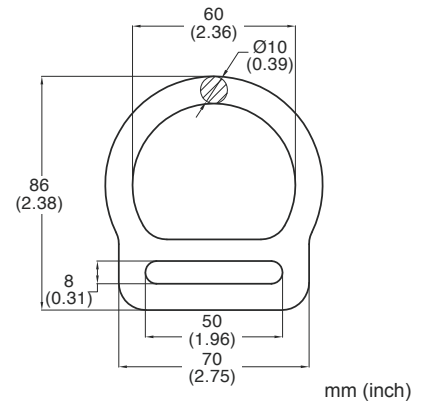

anodized clear

N-519 Aluminum Bent D-Ring


Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 1.8 oz. / 51 g.

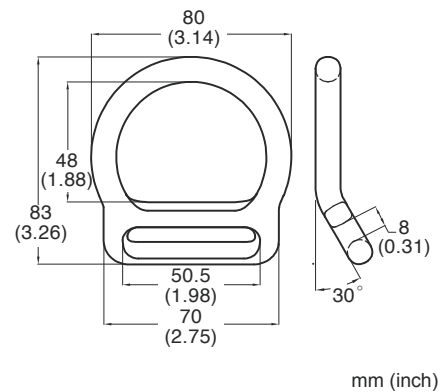

anodized clear

N-528 Aluminum D-Ring


Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.6 oz. / 75 g.

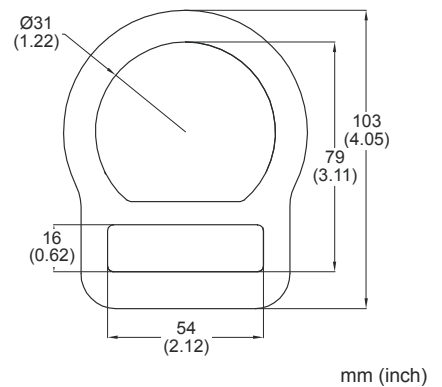

anodized clear

N-529 Aluminum Bent D-Ring


Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.8 oz. / 78 g.

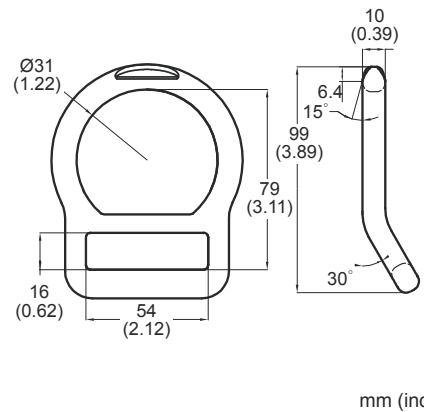

anodized clear

**N-5416
Aluminum D-Ring**

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.9 oz. / 83 g




mm (inch)

anodized clear

**N-5203
Aluminum D-Ring**

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.2 oz. / 62 g

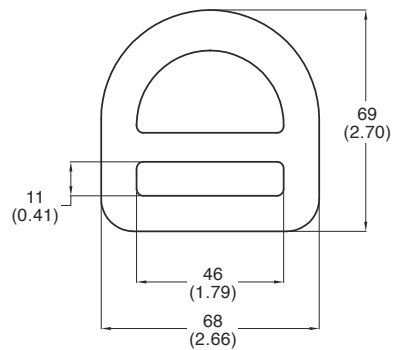


mm (inch)

anodized clear

**N-5204
Aluminum Bent D-Ring**

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.9 oz. / 53 g

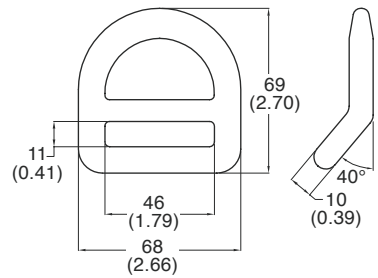


mm (inch)

anodized clear

**N-512
Aluminum D-Ring**

Forged aluminum alloy
 Min. Breaking load : 4000 lbs / 18 kN
 Net weight : 1.6 oz. / 44 g




mm (inch)

anodized clear

N-5407

Aluminum D-Ring

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.3 oz. / 65 g




mm (inch)

anodized clear

N-5407B

Aluminum Bent D-Ring

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.2 oz. / 64 g

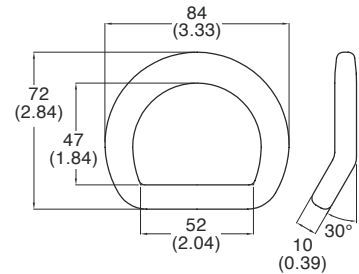


mm (inch)

anodized clear

N-5720

Aluminum Quick Buckle

Forged aluminum alloy
 Min. Breaking load : 2000 lbs / 9 kN
 Net weight : 0.39 oz. / 11 g

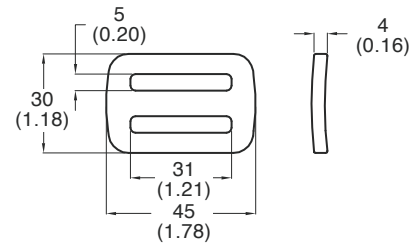


mm (inch)

anodized clear

N-5722

Aluminum Quick Buckle

Forged aluminum alloy
 Min. Breaking load : 2000 lbs / 9 kN
 Net weight : 0.35 oz. / 10 g

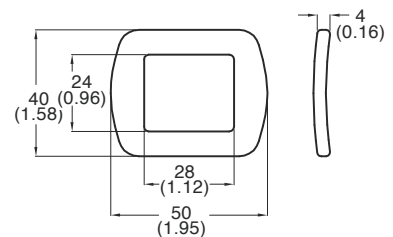


mm (inch)

anodized clear

N-5740
Aluminum Quick Buckle
 Forged aluminum alloy
 Min. Breaking load : 2000 lbs / 9 kN
 Net weight : 0.46 oz. / 13 g


anodized clear

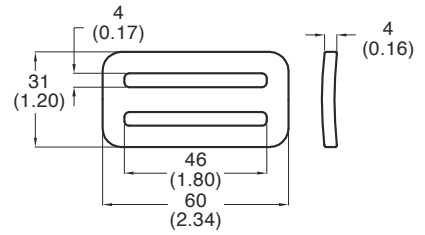

mm (inch)

N-5741
Aluminum Quick Buckle
 Forged aluminum alloy
 Min. Breaking load : 3400 lbs / 15 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 0.49 oz. / 14 g


anodized clear

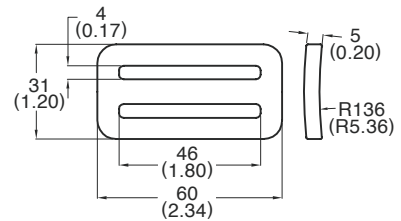

mm (inch)

N-5742
Aluminum Quick Buckle
 Forged aluminum alloy
 Min. Breaking load : 3400 lbs / 15 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 0.42 oz. / 12 g


anodized clear

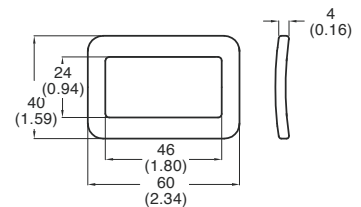

mm (inch)

N-5748
Aluminum Quick Buckle
 Forged aluminum alloy
 Min. Breaking load : 3400 lbs / 15 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 0.95 oz. / 27 g

anodized clear

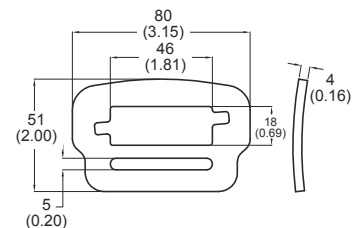


mm (inch)

Aluminum Components



N-507 Aluminum D-Ring

Forged aluminum alloy
Min. Breaking load : 4000 lbs / 18 kN
Net weight : 3.7 oz. / 106 g.

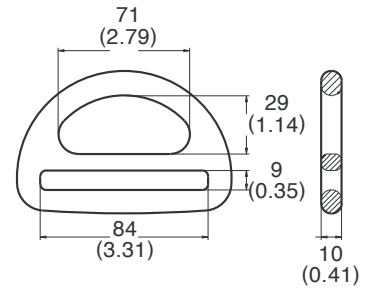


anodized clear

mm (inch)

N-509 Aluminum Long Adjuster

Forged aluminum alloy
Min. Breaking load : 2200 lbs / 11 kN
Net weight : 2.0 oz. / 56 g.




anodized clear

mm (inch)

N-508 Aluminum Adjuster

Forged aluminum alloy
Min. Breaking load : 4500 lbs / 20 kN
Net weight : 1.3 oz. / 37 g.



anodized clear

mm (inch)

N-511 Aluminum Tongue Buckle with double tongue


Forged aluminum alloy
Min. Breaking load : 4000 lbs / 18 kN
Net weight : 2.0 oz. / 58 g.



N-511



N-510

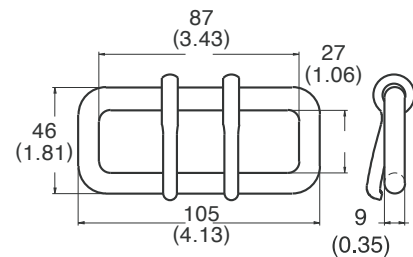



N-510

Aluminum Loop only.
without double tongue polished

mm (inch)

**N-5439
Aluminum Tongue Buckle**

Forged aluminum alloy
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.3 oz. / 67 g

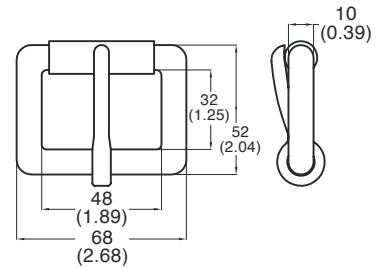


anodized clear

mm (inch)

**N-533
Aluminum Adjuster Buckle**

Forged aluminum alloy
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.9 oz. / 54 g

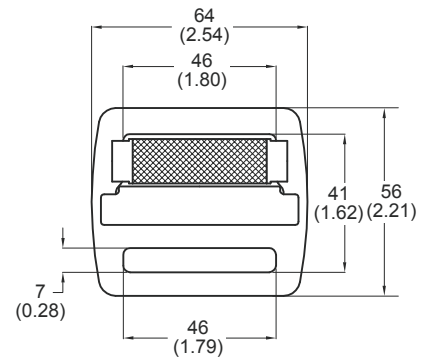


anodized clear

mm (inch)

**N-51428 / N-51445 / N-51460
Aluminum O Ring**

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN

Art.No	Dimensions(mm)			Weight	
	A	B	C	(g)	(oz)
N-51428	ø12	52	28	38	1.3
N-51445	ø12	70	45	55	2.0
N-51460	ø10	80	60	50	1.8



N-51428

N-51445

N-51460


anodized clear

Aluminum Components



N-5860 QRA Buckle



Forged aluminum alloy
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.3 oz. / 150 g.



mm (inch)

N-5861 QRA Buckle


Forged aluminum alloy
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.9 oz. / 110 g.

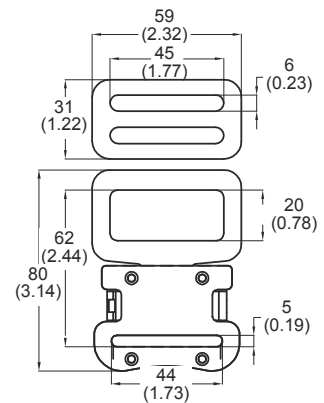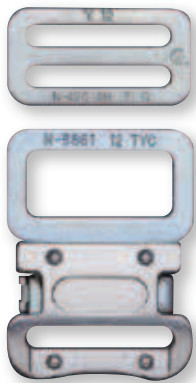

mm (inch)

N-5862 QRA Buckle


Forged aluminum alloy
 Min. Breaking Load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.5 oz. / 100 g.



mm (inch)

N-5867 QRA Buckle

Forged aluminum alloy
 Min. Breaking load : 2000 lbs / 9 kN
 Net weight : 3.6 oz. / 103 g

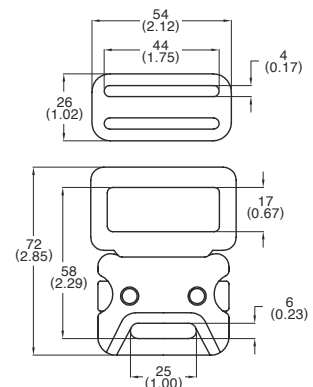


mm (inch)

anodized clear

N-5877
Extra Lock Aluminum QR Buckle

Aluminum alloy
 Net weight : 4.6 oz. / 131 g
Patent Pending

New

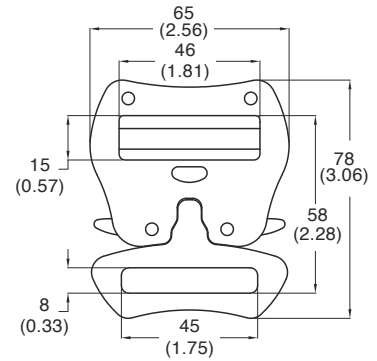


anodized black

mm (inch)

N-5868
Aluminum QR Buckle

Aluminum alloy
 Net weight : 1.82 oz. / 52 g

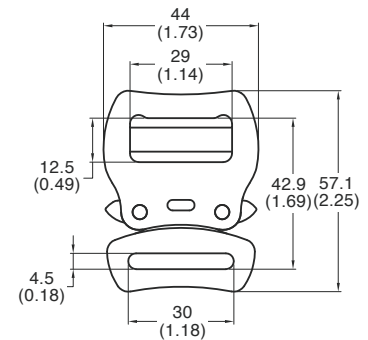


anodized black

mm (inch)

N-5868T
Aluminum QR Buckle

Aluminum alloy
 Net weight : 2.14 oz. / 61 g

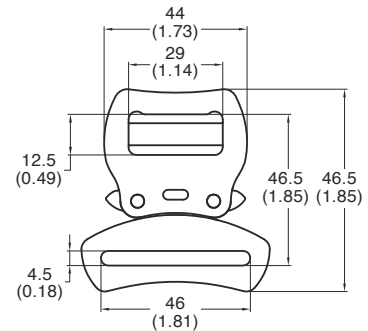


anodized black

mm (inch)

N-5869T
Aluminum QR Buckle

Aluminum alloy
 Net weight : 2.45 oz. / 70 g

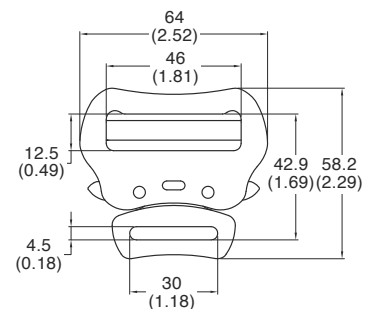


anodized black


mm (inch)

N-5869 Aluminum QR Buckle

Aluminum alloy



Net weight : 2.8 oz. / 79g

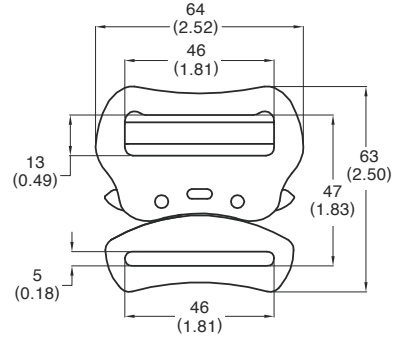


mm (inch)


anodized black

N-5870A Aluminum QR Buckle

Forged aluminum alloy



Net weight : 2.7 oz. / 76 g

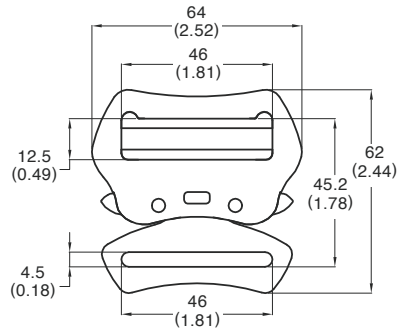


mm (inch)

anodized black

New

N-5871 Aluminum QR Buckle


Forged aluminum alloy



Meets :

- ANSI Z359.12-09
- CSA Z259.12-11

Net weight : 3.2 oz. / 93 g

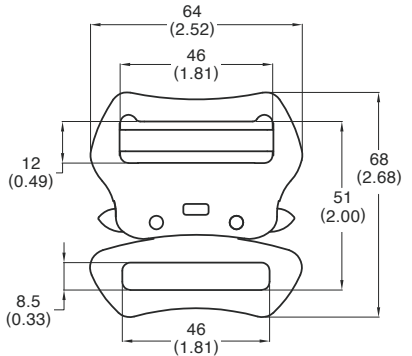

mm (inch)

anodized clear

N-5212 Aluminum Adjuster Buckle


Forged aluminum alloy

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-09
- CSA Z259.12-11

Net weight : 2.7 oz. / 76 g



mm (inch)

anodized black

N-479-S

QRA Buckle


Stainless steel

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-09
- CSA Z259.12-11

Net weight : 4.4 oz. / 125 g

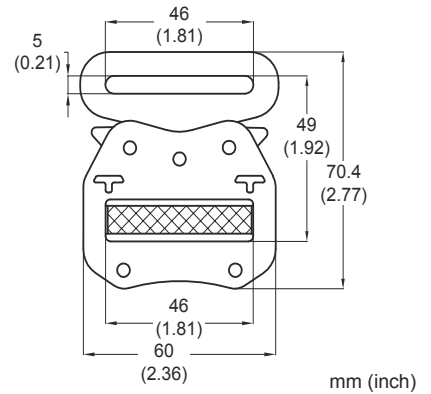

zinc plated


N-3591-S

Swivels - Jaw to Jaw

Stainless Steel, SUS 304

Min Breaking load : 5000 lbs / 23 kN

Net weight : 2.5 oz. / 74 g

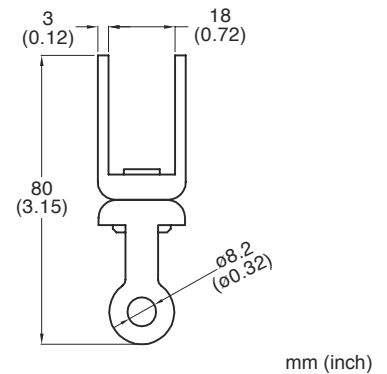

polished


N-904-S

Anchorage Connector (5/8")

Stainless steel

Min. Breaking load : 5000 lbs / 23 kN

Net weight : 22.7 oz. / 645 g.

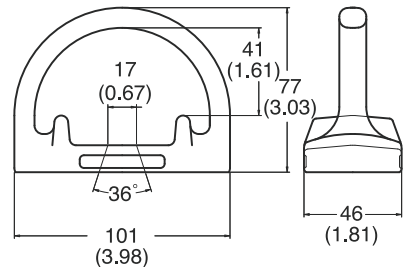

polished


N-430-S

D-Ring, with bar

Stainless steel, SUS 304

Min. Breaking load : 3600 lbs / 16 kN

Net weight : 3.1 oz. / 90 g.

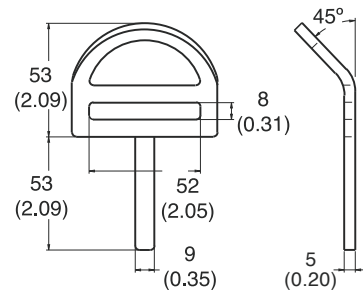


polished

mm (inch)

**N-403-S
D-Ring**

Stainless steel, SUS 304
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 3.0 oz. / 85 g

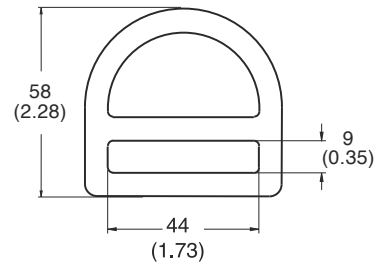


mm (inch)

polished

**N-402-S
D-Ring**

Stainless steel, SUS 304
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 3.5 oz. / 98 g




mm (inch)

polished

**N-432-S
D-Ring**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Net weight : 2.8 oz. / 80 g

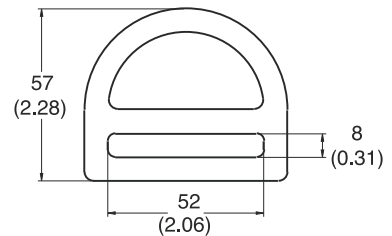


mm (inch)

polished

**N-431-S
D-Ring, parabolic**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Net weight : 2.8 oz. / 80 g

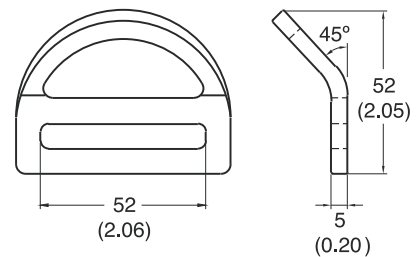


mm (inch)

polished

**N-414-S
D-Ring**

Forged Stainless steel, SUS 304
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 5.6 oz. / 159 g




polished

mm (inch)

**N-415-S
D-Ring**

Sheet Stainless steel, SUS 304
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 4.9 oz. / 140 g

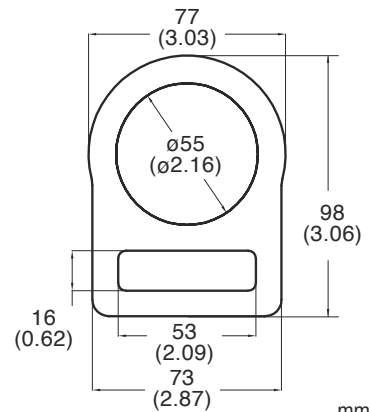


polished

mm (inch)

**N-420-S
Quick Buckle**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.0 oz. / 28 g.

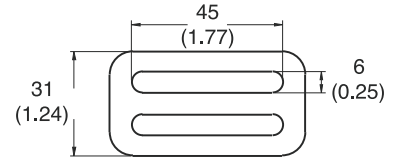


mm (inch)

polished

**N-422-S
Quick Buckle**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.1 oz. / 31 g.

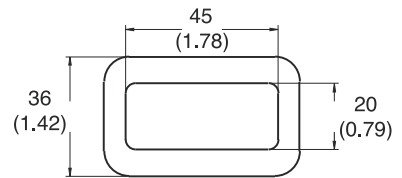


mm (inch)

polished

**N-421-S
Quick Buckle**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 1.8 oz. / 50 g.




mm (inch)

polished

**N-423-S
Quick Buckle**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-09
 ● CSA Z259.12-11
 Net weight : 2.4 oz. / 69 g.

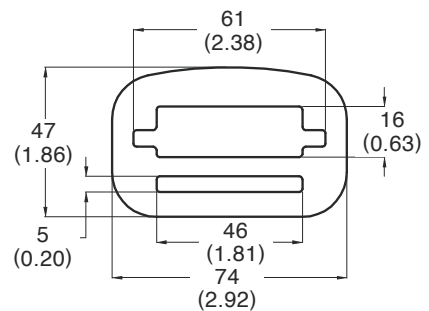


mm (inch)

polished

**N-306-S
Stamped Snap Hook**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Net weight : 9.7 oz. / 275 g.




polished

mm (inch)

**N-244-0-S
Carabiner**

Stainless steel, SUS 304
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 6.0 oz. / 169 g.




polished

mm (inch)

**N-252-S
Carabiner**

Stainless steel, SUS 304
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 9.0 oz. / 255 g.




polished

mm (inch)

**N-256-S
Carabiner**

Stainless steel, SUS 304
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 8.8 oz. / 250 g.



polished

mm (inch)


Stainless steel Components



N-268G-S

Carabiner 3600 LBS gate strength

Stainless steel, SUS 420
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN



mm (inch)

Art. No.	3600 Lbs Gate Strength	Gate Feature		Body
		Twist Locking	Triple Locking	
N-268G-CP-S	✓	✓		✓
N-268G-TRCP-S	✓		✓	✓


Net weight : 8.9 oz. / 254 g

zinc plated

N-3610-S

Rope Snap Hook 3600 LBS gate strength

Forged Stainless steel, SUS 420
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN



mm (inch)

Meets :

- ANSI Z359.12-09
- CSA Z259.12-11


Net weight : 13.7 oz. / 391 g

zinc plated


N-3615-S

Indicator Swivel Snap Hook 3600 LBS gate strength

Forged Stainless steel, SUS 420
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN



Indicator activation

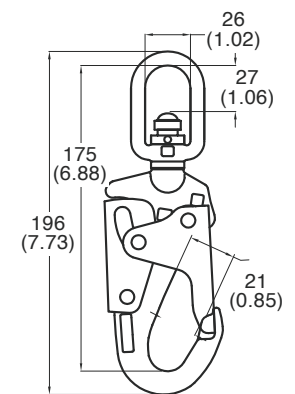

mm (inch)

Meets :

- ANSI Z359.12-09
- CSA Z259.12-11


Net weight : 18.0 oz. / 514 g

zinc plated

N-3616-S

Swivel Snap Hook 3600 LBS gate strength

Forged stainless Steel, SUS 420
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN

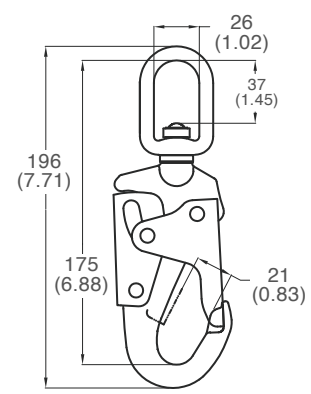

mm (inch)

Meets :

- ANSI Z359.12-09
- CSA Z259.12-11

Net weight : 17.6 oz. / 504 g

zinc plated

YOKE



YOKE carabiners are tested by:

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-09 CSA Z259.12-11 EN 362:2004









YOKE has expanded our carabiner offering to include Aluminum and Steel carabiners. YOKE also offers carabiners in four different versions to better meet varying workplace demands :


- Twist lock gate
- Screw lock gate
- Triple lock gate
- With or Without captive pin

YOKE Aluminum & Steel Carabiners the model with "G" are ANSI Z359.12-2009 compliant for 3600 lbs gate strength.


- ANSI Z359.12-2009
Gate Strength 3600 lbs

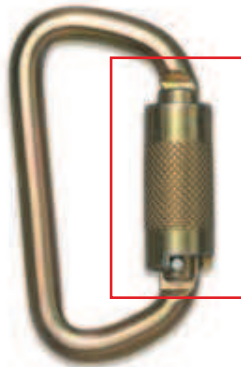

Screw Gate



Twist Locking



Triple Locking (TR)



Captive Pin (CP)

Nose Design



The "SNAG FREE" icon means that the carabiner body/gate has a smooth notch where the nose of the carabiner and gate meet. this smooth area prevents the carabiner from becoming 'snagged' on attachment points such as webbing, d-ring, etc.



YOKE carabiners are tested by :

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-09 CSA Z259.12-11 EN 362:2004





N-250GK

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-250GK	✓		✓		
N-250GK-TR	✓			✓	
N-250GK-CP	✓		✓		✓
N-250GK-TRCP	✓			✓	✓



yellow zinc

Net weight : 7.6 oz. / 216 g



mm (inch)

N-250G

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-250-0		✓			
N-250			✓		
N-250G	✓		✓		
N-250G-TR	✓			✓	
N-250G-CP	✓		✓		✓
N-250G-TRCP	✓			✓	✓

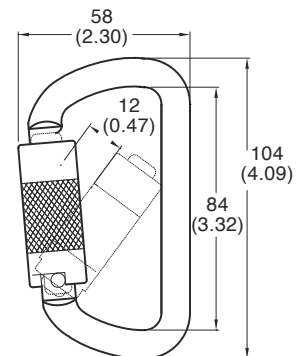

yellow zinc

Net weight : 7.6 oz. / 215 g.



mm (inch)

N-251G

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-251-0		✓			
N-251			✓		
N-251G	✓		✓		
N-251G-TR	✓			✓	
N-251G-CP	✓		✓		✓
N-251G-TRCP	✓			✓	✓

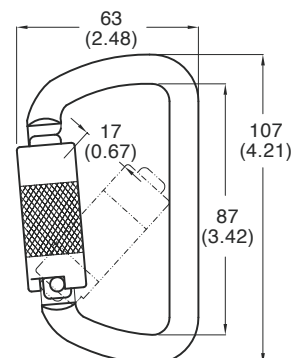

yellow zinc

Net weight : 8.0 oz. / 226 g.

mm (inch)

YOKE carabiners are tested by:

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-09 CSA Z259.12-11 EN 362:2004



N-252GK


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-252GK	✓		✓		
N-252GK-TR	✓			✓	
N-252GK-CP	✓		✓		✓
N-252GK-TRCP	✓			✓	✓

yellow zinc

Net weight : 8.8 oz. / 252 g.



mm (inch)

N-252G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-252-0		✓			
N-252			✓		
N-252G	✓		✓		
N-252G-TR	✓			✓	
N-252G-CP	✓		✓		✓
N-252G-TRCP	✓			✓	✓

yellow zinc

Net weight : 8.8 oz. / 250 g.



mm (inch)

N-246G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-246-0		✓			
N-246			✓		
N-246G	✓		✓		
N-246G-TR	✓			✓	
N-246G-CP	✓		✓		✓
N-246G-TRCP	✓			✓	✓

yellow zinc

Net weight : 10.1 oz. / 288 g.



mm (inch)

YOKE carabiners are tested by :

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-09 CSA Z259.12-11 EN 362:2004



N-254G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-254-0		✓			
N-254-CP			✓		✓
N-254-TRCP				✓	✓
N-254G	✓	✓	✓		
N-254G-TR	✓			✓	
N-254G-CP	✓		✓		✓
N-254G-TRCP	✓			✓	✓

yellow zinc

Net weight : 12.9 oz. / 369 g.



mm (inch)

N-268G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-268-0		✓			
N-268			✓		
N-268G	✓		✓		
N-268G-TR	✓			✓	
N-268G-CP	✓		✓		✓
N-268G-TRCP	✓			✓	✓

yellow zinc

Net weight : 9.9 oz. / 280 g.



mm (inch)

N-245G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-245-0		✓			
N-245			✓		
N-245G	✓		✓		
N-245G-TR	✓			✓	
N-245G-CP	✓		✓		✓
N-245G-TRCP	✓			✓	✓

yellow zinc

Net weight : 7.1 oz. / 200 g.



mm (inch)

YOKE carabiners are tested by:

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-09 CSA Z259.12-11 EN 362:2004



N-248G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body	
		Screw gate	Twist Locking	Triple Locking	Captive Pin	
N-248-0		✓				
N-248			✓			
N-248G	✓		✓			
N-248G-TR	✓			✓		
N-248G-CP	✓		✓		✓	
N-248G-TRCP	✓			✓	✓	

yellow zinc

Net weight : 10.5 oz. / 299 g.



mm (inch)

N-258G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body	
		Screw gate	Twist Locking	Triple Locking	Captive Pin	
N-258			✓			
N-258G	✓		✓			
N-258G-TR	✓			✓		
N-258G-CP	✓		✓		✓	
N-258G-TRCP	✓			✓	✓	

yellow zinc

Net weight : 22.0 oz. / 625 g.

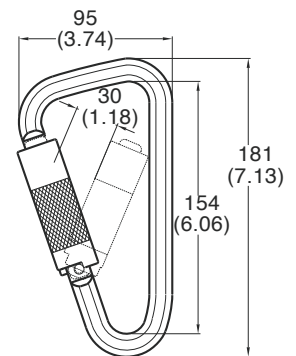

mm (inch)

N-263G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body	
		Screw gate	Twist Locking	Triple Locking	Captive Pin	
N-263-0		✓				
N-263			✓			
N-263G	✓		✓			
N-263G-TR	✓			✓		
N-263G-CP	✓		✓		✓	
N-263G-TRCP	✓			✓	✓	

yellow zinc

Net weight : 15.8 oz. / 447 g.

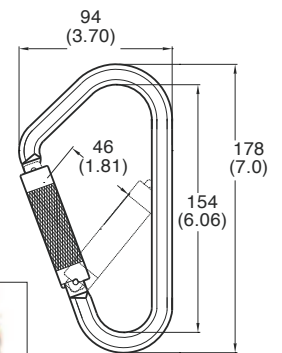

mm (inch)

YOKE carabiners are tested by :

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-09 CSA Z259.12-11 EN 362:2004



N-267G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-267-0		✓			
N-267			✓		
N-267G	✓		✓		
N-267G-TR	✓			✓	
N-267G-CP	✓		✓		✓
N-267G-TRCP	✓			✓	✓

yellow zinc

Net weight : 7.7 oz. / 219 g.



mm (inch)

N-256G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-256-0		✓			
N-256			✓		
N-256G	✓		✓		
N-256G-TR	✓			✓	
N-256G-CP	✓		✓		✓
N-256G-TRCP	✓			✓	✓

yellow zinc

Net weight : 9.8 oz. / 279 g.



mm (inch)

N-247G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-247-0		✓			
N-247			✓		
N-247G	✓		✓		
N-247G-TR	✓			✓	
N-247G-CP	✓		✓		✓
N-247G-TRCP	✓			✓	✓

yellow zinc

Net weight : 11.0 oz. / 313 g.



mm (inch)

YOKE carabiners are tested by:


100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-09 CSA Z259.12-11 EN 362:2004



N-244G

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

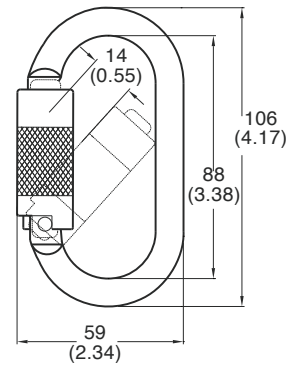

N-244-0

mm (inch)

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-244-0		✓			
N-244			✓		
N-244G	✓		✓		
N-244G-TR	✓			✓	
N-244G-CP	✓		✓	✓	✓
N-244G-TRCP	✓			✓	✓


yellow zinc

Net weight : 7.6 oz. / 215 g.

N-261G

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated



mm (inch)

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-261-0		✓			
N-261			✓		
N-261G	✓		✓		
N-261G-TR	✓			✓	


yellow zinc

Net weight : 10.7 oz. / 305 g.

N-257G

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated



mm (inch)

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-257			✓		
N-257G	✓		✓		
N-257G-TR	✓			✓	
N-257G-CP	✓		✓		✓
N-257G-TRCP	✓			✓	✓

yellow zinc

Net weight : 28.3 oz. / 803 g.

YOKE carabiners are tested by :

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-09 CSA Z259.12-11 EN 362:2004



N-259G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-259			✓		
N-259G	✓		✓		
N-259G-TR	✓			✓	
N-259G-CP	✓		✓		✓
N-259G-TRCP	✓			✓	✓

yellow zinc

Net weight : 27.3 oz. / 774 g.



mm (inch)

N-265G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-265			✓		
N-265G	✓		✓		
N-265G-TR	✓			✓	
N-265G-CP	✓		✓		✓
N-265G-TRCP	✓			✓	✓

yellow zinc

Net weight : 28.8 oz. / 817 g.



mm (inch)

N-2615G

Indicator Swivel Steel Carabiner


3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-2615-0		✓			
N-2615			✓		
N-2615G	✓		✓		
N-2615G-TR	✓			✓	

yellow zinc

Net weight : 14.9 oz. / 423 g.

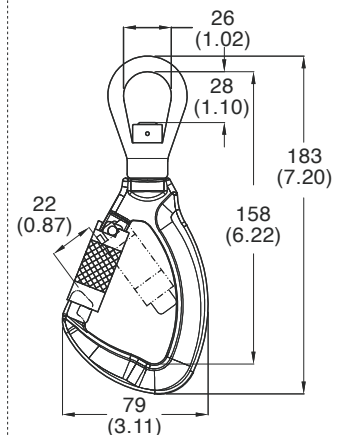

mm (inch)

YOKE carabiners are tested by:

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-09 CSA Z259.12-11 EN 362:2004



Steel Carabiner

Art. NO.	N-250G	N-244G	N-245G	N-251G	N-267G	N-252G	N-246G	N-268G	N-248G	N-247G
Ø mm (inch)	10 (0.39)	10 (0.39)	10 (0.39)	10 (0.39)	10 (0.39)	11 (0.43)	12 (0.47)	12 (0.47)	12 (0.47)	12 (0.47)
Breaking load minimum (kN)	40 (kN)	25 (kN)	25 (kN)	30 (kN)	30 (kN)	41 (kN)	45 (kN)	50 (kN)	50 (kN)	35 (kN)
Gate opening mm (inch)	12 (0.47)	14 (0.55)	15 (0.59)	17 (0.67)	17 (0.67)	19 (0.75)	22 (0.87)	17 (0.67)	24 (0.94)	27 (1.06)
O.L. mm (inch)	104 (4.09)	106 (4.17)	106 (4.17)	107 (4.21)	108 (4.25)	111 (4.37)	113 (4.45)	113 (4.45)	119 (4.68)	123 (4.84)

Steel Carabiner

Art. NO.	N-256G	N-254G	N-261G	N-263G	N-258G	N-2615G	N-259G	N265G	N-257G
Ø mm (inch)	11 (0.43)	18 (0.71)	--	12 (0.47)	14 (0.55)	--	14 (0.55)	14 (0.55)	14 (0.55)
Breaking load minimum (kN)	45 (kN)	50 (kN)	45 (kN)	35 (kN)	50 (kN)	35 (kN)	35 (kN)	45 (kN)	50 (kN)
Gate opening mm (inch)	24 (0.94)	21 (0.82)	20 (0.79)	46 (1.81)	30 (1.18)	22 (0.87)	51 (2.01)	54 (2.13)	47 (1.85)
O.L. mm (inch)	124 (4.88)	134 (5.28)	134 (5.28)	178 (7.01)	181 (7.13)	183 (7.20)	217 (8.54)	221 (8.70)	223 (8.78)



YOKE Aluminum carabiners are tested by :


Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004



N-281
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-281-0	✓			
N-281		✓		
N-281-TR			✓	
N-281-CP		✓		✓
N-281-TRCP			✓	✓




anodized clear Net weight : 2.3 oz. / 66 g.

mm (inch)

N-271
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-271-0	✓			
N-271		✓		
N-271-TR			✓	
N-271-CP		✓		✓
N-271-TRCP			✓	✓




anodized clear Net weight : 3.4 oz. / 96 g.

mm (inch)

**N-273
Aluminum Carabiner**

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-273-0	✓			
N-273		✓		
N-273-TR			✓	
N-273-CP		✓		✓
N-273-TRCP			✓	✓




anodized clear Net weight : 3.0 oz. / 86 g.

mm (inch)

**N-284
Aluminum Carabiner**

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-284-0	✓			
N-284		✓		
N-284-TR			✓	
N-284-CP		✓		✓
N-284-TRCP			✓	✓




anodized clear Net weight : 3.5 oz. / 92 g.

mm (inch)

**N-283
Aluminum Carabiner**

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-283-0	✓			
N-283		✓		
N-283-TR			✓	
N-283-CP		✓		✓
N-283-TRCP			✓	✓



anodized clear Net weight : 3.5 oz. / 92 g.

mm (inch)

YOKE Aluminum carabiners are tested by :


Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004



N-274
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-274-0	✓			
N-274		✓		
N-274-TR			✓	
N-274-CP		✓		✓
N-274-TRCP			✓	✓




anodized clear Net weight : 4.0 oz. / 114 g.

mm (inch)

N-272
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-272-0	✓			
N-272		✓		
N-272-TR			✓	
N-272-CP		✓		✓
N-272-TRCP			✓	✓




anodized clear Net weight : 3.5 oz. / 98 g.

mm (inch)

N-276
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-276-0	✓			
N-276		✓		
N-276-TR			✓	
N-276-CP		✓		✓
N-276-TRCP			✓	✓



anodized clear Net weight : 3.2 oz. / 91 g.

mm (inch)




YOKE Aluminum carabiners are tested by :

**Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004**

**N-270
Aluminum Carabiner**

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-270-0	✓			
N-270		✓		
N-270-TR			✓	
N-270-CP		✓		✓
N-270-TRCP			✓	✓




anodized clear Net weight : 2.8 oz. / 78 g.

mm (inch)

**N-282
Aluminum Carabiner**

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-282-0	✓			
N-282		✓		
N-282-TR			✓	
N-282-CP		✓		✓
N-282-TRCP			✓	✓




anodized clear Net weight : 3.0 oz. / 86 g.

mm (inch)

**N-275
Aluminum Carabiner**

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-275-0	✓			
N-275		✓		
N-275-TR			✓	

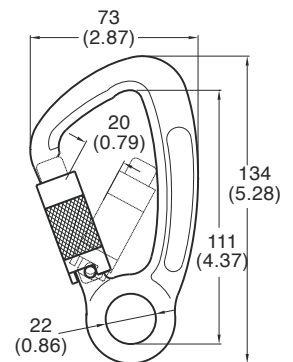

anodized clear Net weight : 3.3 oz. / 93 g.

mm (inch)

YOKE Aluminum carabiners are tested by :


Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004



N-287
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-287-0	✓			
N-287	✓			
N-287-CP		✓		✓
N-287-TR		✓		
N-287-TRCP			✓	✓




anodized clear Net weight : 7.2 oz. / 205 g.

mm (inch)

N-277
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature		Body
	Twist Locking	Triple Locking	Captive Pin
N-277-CP	✓		✓
N-277-TRCP		✓	✓




anodized clear Net weight : 13.5 oz. / 384 g.

mm (inch)

N-278
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature		Body
	Twist Locking	Triple Locking	Captive Pin
N-278-CP	✓		✓
N-278-TRCP		✓	✓



anodized clear Net weight : 13.0 oz. / 368 g.


mm (inch)

N-2750

Swivel Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2750-0	✓			
N-2750		✓		
N-2750-TR			✓	

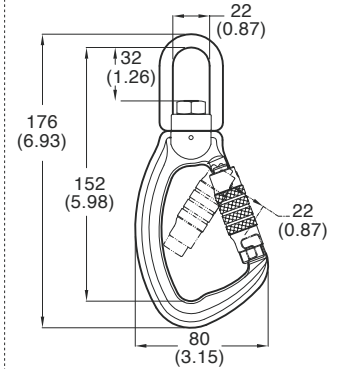

anodized clear Net weight : 7.5 oz. / 214 g.


mm (inch)

N-2852

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2852-0	✓			
N-2852		✓		
N-2852-TR			✓	
N-2852-CP		✓		✓
N-2852-TRCP			✓	✓



anodized clear Net weight : 3.7 oz. / 108 g.


mm (inch)

N-2854

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2854-0	✓			
N-2854		✓		
N-2854-TR			✓	
N-2854-CP		✓		✓
N-2854-TRCP			✓	✓



anodized clear Net weight : 3.6 oz. / 103 g.

mm (inch)

YOKE Aluminum carabiners are tested by :


Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004



N-2855
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2855-0	✓			
N-2855		✓		
N-2855-TR			✓	



anodized clear Net weight : 4.6 oz. / 132 g.

mm (inch)


N-2857
Aluminum Indicator Swivel Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2857-0	✓			
N-2857		✓		
N-2857-TR			✓	



Indicator activation

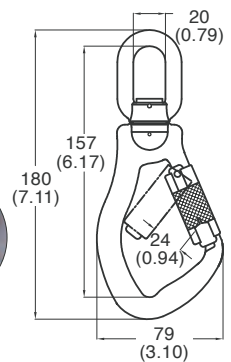


anodized clear Net weight : 6.2 oz. / 177 g.

mm (inch)

N-2857/0
Aluminum Swivel Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2857/0-0	✓			
N-2857/0		✓		
N-2857/0-TR			✓	

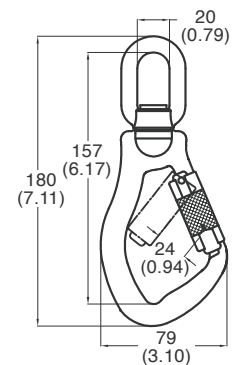

anodized clear Net weight : 6.1 oz. / 172 g.


mm (inch)



YOKE carabiners are tested by :
Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004

N-2859
Aluminum Carabiner

Aluminum alloy, SAE 7075



Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2859-0	✓			
N-2859		✓		
N-2859-TR			✓	
N-2859-CP		✓		✓
N-2859-TRCP			✓	✓

anodized clear

Net weight : 4.1 oz. / 118 g.

mm (inch)

YOKE Aluminum carabiners are tested by :

Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004



Aluminum Carabiner



Art. NO.	N-281	N-2859	N-270	N-282	N-272	N-273	N-276	N-271	N-283	N-2854
Ø mm (inch)	10 (0.39)	--	11 (0.43)	11 (0.43)	12 (0.47)	--	--	12 (0.47)	12 (0.47)	--
Breaking load minimum (kN)	23 (kN)	23 (kN)	23 (kN)	23 (kN)	23 (kN)	30 (kN)	24 (kN)	25 (kN)	23 (kN)	25 (kN)
Gate opening mm (inch)	20 (0.79)	26 (1.02)	19 (0.75)	18 (0.71)	23 (0.91)	22 (0.87)	23 (0.91)	22 (0.87)	22 (0.87)	27 (1.06)
O.L. mm (inch)	104 (4.09)	105 (4.13)	109 (4.29)	110 (4.33)	112 (4.41)	112 (4.41)	112 (4.41)	113 (4.45)	113 (4.45)	122 (4.80)

Aluminum Carabiner



Art. NO.	N-274	N-2852	N-284	N-275	N-2855	N-2750	N-2857	N-2857/0	N-287	N-277	N-278
Ø mm (inch)	12 (0.47)	--	11 (0.43)	--	--	--	--	--	15 (0.59)	16 (0.63)	16 (0.63)
Breaking load minimum (kN)	25 (kN)	23 (kN)	23 (kN)	28 (kN)	35 (kN)	23 (kN)	30 (kN)	30 (kN)	12 (kN)	35 (kN)	23 (kN)
Gate opening mm (inch)	23 (0.91)	25 (0.98)	25 (0.98)	20 (0.79)	25 (0.98)	22 (0.87)	24 (0.94)	24 (0.94)	42 (1.64)	52 (2.05)	54 (2.13)
O.L. mm (inch)	124 (4.88)	124 (4.88)	125 (4.92)	134 (5.28)	141 (5.55)	176 (6.93)	180 (7.09)	180 (7.09)	185 (7.74)	225 (8.85)	239 (9.41)



YOKE Aluminum carabiners are tested by :

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-09 CSA Z259.12-11 EN 362:2004




N-2852G

Aluminum Carabiner 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2852G	✓	✓		
N-2852G-TR	✓		✓	
N-2852G-CP	✓	✓		✓
N-2852-TRCP	✓		✓	✓

anodized clear Net weight : 4.6 oz. / 131 g



mm (inch)


N-2853G

Aluminum Carabiner 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2853G	✓	✓		
N-2853G-TR	✓		✓	
N-2853G-CP	✓	✓		✓
N-2853G-TRCP	✓		✓	✓

anodized clear Net weight : 5.3 oz. / 149.1 g



mm (inch)


N-2854G

Aluminum Carabiner 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2854G	✓	✓		
N-2854G-TR	✓		✓	
N-2854G-CP	✓	✓		✓
N-2854G-TRCP	✓		✓	✓

anodized clear Net weight : 3.3 oz. / 93 g



mm (inch)

YOKE Aluminum carabiners are tested by :

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-09 CSA Z259.12-11 EN 362:2004




N-2855G

Aluminum Carabiner 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature		
	3600Lbs Gate Strength	Twist Locking	Triple Locking
N-2855G	✓	✓	
N-2855G-TR	✓		✓



anodized clear Net weight : 5.3 oz. / 149.1 g



mm (inch)

N-2857G


Aluminum Indicator Swivel Carabiner

3600 LBS gate strength Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2857G	✓	✓		
N-2857G-TR	✓		✓	

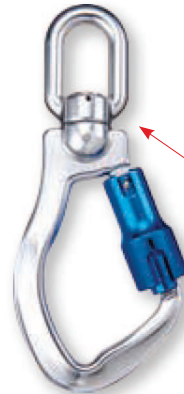

Indicator activation

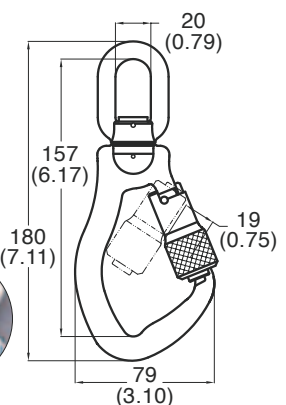

anodized clear Net weight : 7.2 oz. / 205 g


mm (inch)

N-2857/0G

Aluminum Swivel Carabiner

3600 LBS gate strength Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2857/0G	✓	✓		
N-2857/0G-TR	✓		✓	

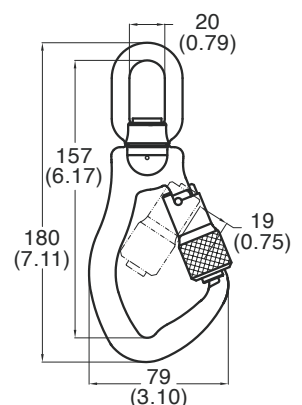

anodized clear Net weight : 7.0 oz. / 200 g

mm (inch)

YOKE Aluminum carabiners are tested by :


100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-09 CSA Z259.12-11 EN 362:2004



N-2859G

Aluminum Carabiner 3600 LBS gate strength

Aluminum alloy, SAE 7075



Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2859G	✓	✓		
N-2859G-TR	✓		✓	
N-2859G-CP	✓	✓		✓
N-2859G-TRCP	✓		✓	✓


anodized clear Net weigh : 5.0 oz. / 142 g

mm (inch)

N-2868G

Aluminum Carabiner 3600 LBS gate strength

Aluminum alloy, SAE 7075



Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2868G-CP	✓	✓		✓
N-2868G-TRCP	✓		✓	✓

anodized clear Net weight : 15.9 oz. / 450 g

mm (inch)

SNAG FREE Aluminum Carabiner



Art.NO.	N-2859G	N-2854G	N-2852G	N-2853G	N-2855G	N-2857G	N-2868G
Breaking load minimum(kN)	23 kN	25 kN	23 kN	40 kN	35 kN	30 kN	25 kN
Gate opening mm(inch)	21 (0.83)	24 (0.94)	20 (0.79)	22 (0.87)	22 (0.87)	19 (0.75)	51 (2.01)
O.L mm(inch)	105 (4.13)	122 (4.80)	124 (4.88)	124 (4.88)	141 (5.55)	180 (7.09)	237 (9.33)



N-610
Panic Rope Grab
(Open type)

Stainless steel

For Rope : 16 mm (5/8 ")


Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-1/2

Net weight : 20.2 oz. / 572 g.

polished

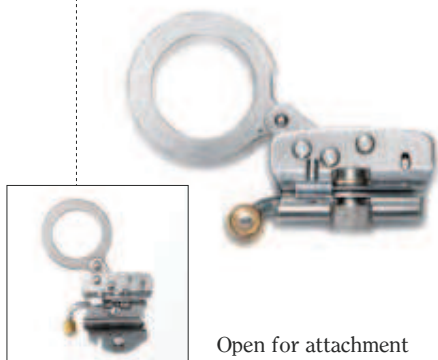

Open for attachment

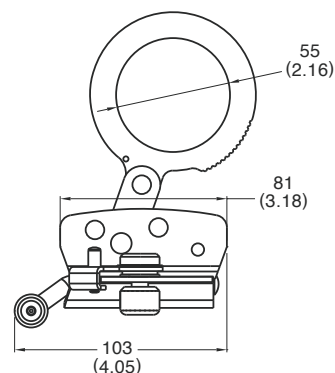

mm (inch)

N-630
Panic Rope Grab
(Open type)

Steel

For Rope : 16 mm (5/8 ")

Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANIS Z359.1
- EN 353-1/2

Net weigh : 20.2 oz. / 578 g

yellow zinc



Open for attachment

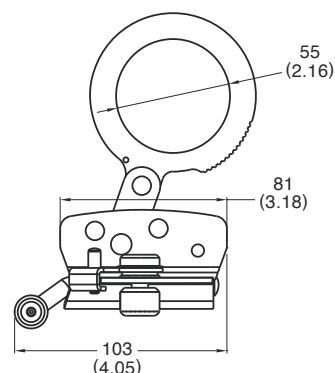

mm (inch)

N-616
Panic Rope Grab
(Open type)

Stainless steel

For Rope : 12.7 - 14 mm (1/2 " - 9/16 ")

Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-1/2

Net weight : 20.2 oz. / 588 g.

polished



Open for attachment

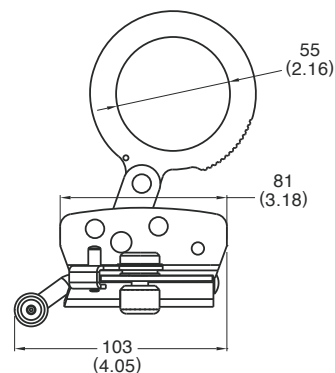

mm (inch)

N-636
Panic Rope Grab
(Open type)

Steel

For Rope : 12.7 - 14 mm (1/2 " - 9/16 ")

Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANIS Z359.1
- EN 353-1/2

Net weight : 20.8 oz. / 594 g

yellow zinc



Open for attachment

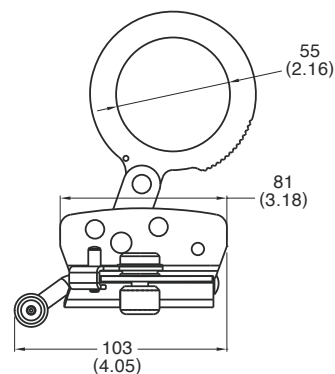

mm (inch)


**N-617
Rope Grab
(Open type)**

Stainless steel
 For Rope : 14 - 16 mm (9/16 " - 5/8 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-1/2
 Net weight : 15.1 oz. / 428 g.

polished



Open for attachment



mm (inch)


**N-637
Rope Grab
(Open type)**

Steel
 For Rope : 14 - 16 mm (9/16 " - 5/8 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-1/2
 Net weight : 15.1 oz. / 432 g

yellow zinc



Open for attachment



mm (inch)


**N-618
Rope Grab
(Open type)**

Stainless steel
 For Rope : 12.7 - 14 mm (1/2 " - 9/16 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-1/2
 Net weight : 20.3 oz. / 580 g

polished



Open for attachment




mm (inch)


**N-638
Rope Grab
(Open type)**

Steel
 For Rope : 12.7 - 14 mm (1/2 " - 9/16 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-1/2
 Net weight : 20.5 oz. / 586 g

yellow zinc

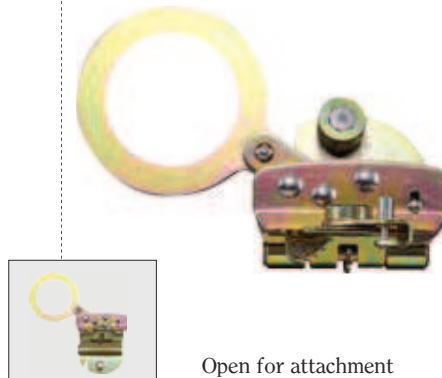

Open for attachment



mm (inch)

**N-619T
Rope Grab
(Open type)**

Stainless Steel

For Rope : 12.7 - 14 mm (1/2 " - 9/16 ")

Min. Breaking load : 3600 lbs / 16 kN

Meets:


- ANSI Z359.1
- EN 353-2

Net weight : 17.5 oz. / 499 g

polished



Open for attachment



mm (inch)

**N-619
Rope Grab
(Open type)**

Stainless Steel

For Rope : 12.7 - 14 mm (1/2 " - 9/16 ")

Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-1/2

Net weight : 14.9 oz. / 428 g

polished



Open for attachment



mm (inch)

**N-639
Rope Grab
(Open type)**

Steel

For Rope : 12.7 - 14 mm (1/2 " - 9/16 ")

Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-1/2

Net weight : 15.1 oz. / 432 g

yellow zinc



Open for attachment



mm (inch)


**N-605/N-606
Open Type Rope Grab
with big eye**

For Rope : 16mm (5/8 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 25.9 oz. / 733 g

Art. No.	Material	Color
N-605	Steel	Zinc Plated
N-606	Stainless Steel	Polished



Open for attachment

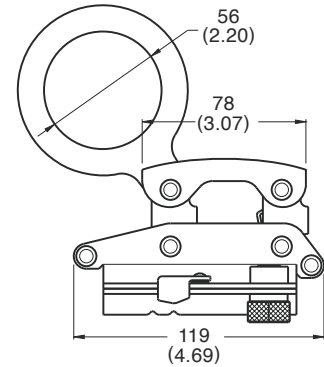


mm (inch)

**N-602-12
Rope Grab with Eye**

Steel
 For Rope : 12 mm (1/2 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets:
 ● ANSI Z359.1
 ● EN 358
 Net weight : 14.4 oz. / 441 g

New

zinc plated




mm (inch)

**N-602
Rope Grab with Eye**

Steel
 For Rope : 16 mm (5/8 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 16.2 oz. / 458 g.

zinc plated




mm (inch)

**N-604
Rope Grab with Hook**

Steel
 For Rope : 16 mm (5/8 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 19.3 oz. / 547 g.

zinc plated




mm (inch)


N-620
Cable Rope Grab With Eye

Stainless steel
 For Wire Rope : 8 mm (5/16")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 16.4 oz. / 465 g

polished



For Wire Rope
 8 mm (5/16")

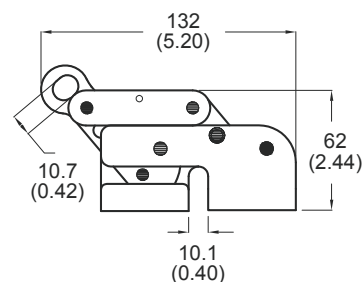


mm (inch)

N-621
Cable Rope Grab With Eye


Stainless steel
 For Wire Rope : 8 mm (5/16")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 16.8 oz. / 477 g

polished



Anti-upside down

For Wire Rope
 8 mm (5/16")

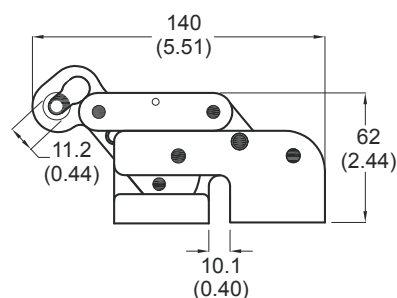

mm (inch)


N-622
Cable Rope Grab With Eye

Stainless steel
 For Wire Rope : 10 mm (3/8")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 16.9 oz. / 478 g

polished



For Wire Rope
 10 mm (3/8")

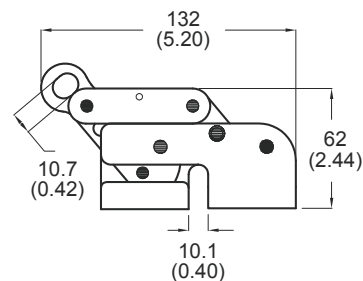


mm (inch)

N-623
Cable Rope Grab With Eye


Stainless steel
 For Wire Rope : 10 mm (3/8")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 17.3 oz. / 490 g

polished



Anti-upside down


For Wire Rope
 10 mm (3/8")

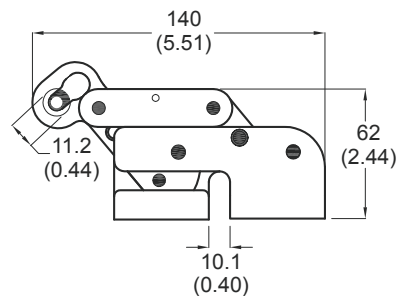

mm (inch)

**N-650
Rope Grab With Fixed Cam**

Aluminum alloy
Rope size : Ø 9 mm — Ø 13 mm
Net weight : 5.8 oz. / 166 g




anodized finish
(customized colors available)

mm (inch)

**N-650B
Rope Grab With Removable Cam**

Aluminum alloy
Rope size : Ø 9 mm — Ø 13 mm
Net weight : 6.2 oz. / 177 g




anodized finish
(customized colors available)

mm (inch)

**N-651
Rope Adjustor Grab With
Fixed Cam**

Aluminum alloy
Rope size : Ø 9 mm — Ø 13 mm
Net weight : 6.1 oz. / 173 g
Not for fall arrest




anodized finish
(customized colors available)

mm (inch)

**N-651B
Rope Adjustor Grab With
Removable Cam**

Aluminum alloy
Rope size : Ø 9 mm — Ø 13 mm
Net weight : 6.4 oz. / 182 g
Not for fall arrest




anodized finish
(customized colors available)

mm (inch)

**N-670
Positioning Grab**

Stainless steel / Aluminum alloy
Rope size : Ø 14 mm – Ø 16 mm
Net weight : 8.3 oz. / 238 g




mm (inch)

polished

**N-660
Rope Grab**

Aluminum alloy
Rope size : Ø 9 mm – Ø 13 mm
Net weight : 7.4 oz. / 210 g.

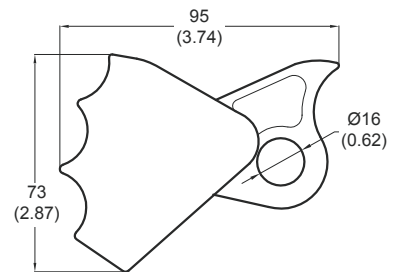

mm (inch)

anodized finish

(customized colors available)






N-351
Swivels - Eye to Eye
(non-indicator)

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 6.2 oz. / 176 g.

yellow zinc

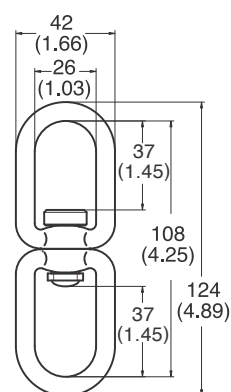


mm (inch)

N-352
Swivels - Jaw to Jaw
(non-indicator)

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 6.3 oz. / 180 g.

yellow zinc




mm (inch)

N-353
Swivels - Jaw to Eye
(non-indicator)

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 6.2 oz. / 175 g.

yellow zinc

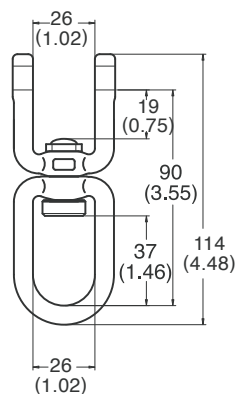


mm (inch)

N-354
Swivels - Eye to Eye
(non-indicator)

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 7.1 oz. / 200 g.

yellow zinc

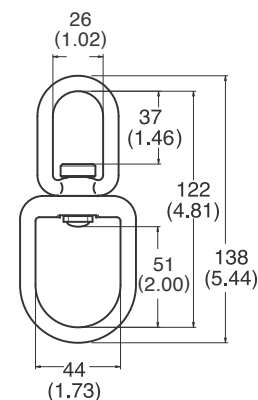

mm (inch)


N-355
Indicator Swivels - Eye to Eye

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 7.4 oz. / 211 g

yellow zinc



Indicator activation

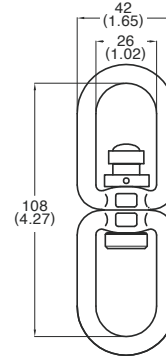

mm (inch)


N-356
Indicator Swivels - Jaw to Jaw

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 6.7 oz. / 190 g

yellow zinc



Indicator activation



mm (inch)


N-357
Indicator Swivels - Jaw to Eye

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 6.5 oz. / 185 g

yellow zinc



Indicator activation

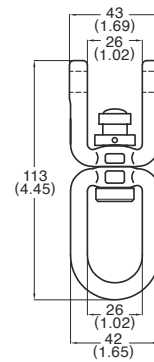

mm (inch)


N-358
Indicator Swivels - Eye to Eye

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 7.4 oz. / 210 g

yellow zinc




Indicator activation

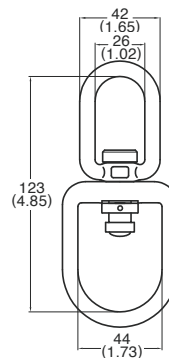

mm (inch)

N-903
Anchorage Connector (1/2")

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
for 1/2 : (M13) bolt.
Net weight : 21.2 oz. / 600 g.

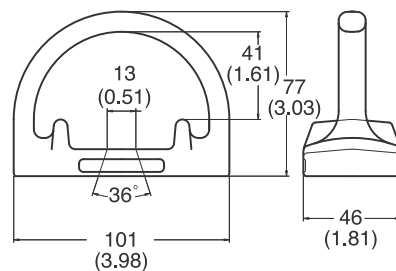


yellow zinc

"Warning: Bolts for anchorage connector installation to be minimum grade 8 quality with lock washer."

mm (inch)

N-904
Anchorage Connector (5/8")

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
for 5/8 : (M16) bolt.
Net weight : 21.3 oz. / 582 g.

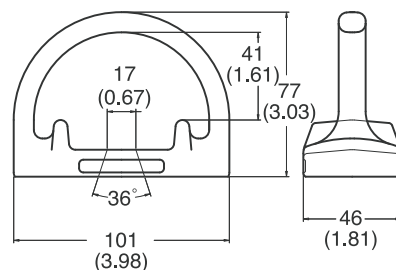


yellow zinc

"Warning: Bolts for anchorage connector installation to be minimum grade 8 quality with lock washer."

mm (inch)

N-905
Anchorage Connector (3/4")

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
for 3/4 : (M19) bolt.
Net weight : 19.6 oz. / 563 g.

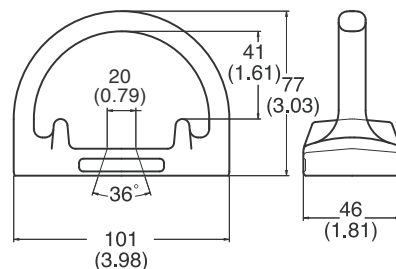


yellow zinc

"Warning: Bolts for anchorage connector installation to be minimum grade 8 quality with lock washer."

mm (inch)

N-907
Anchorage Connector

Completed with grade 8 nut & lock washer
Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 21.3 oz. / 604 g.

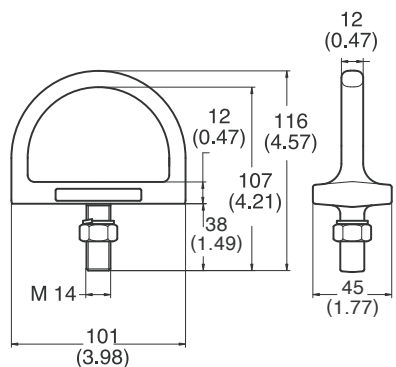


yellow zinc

mm (inch)

N-481
N-481R
Roof Anchor-reusable

Net weight : 39.1 oz. / 1108 g.

Art. No.	Color
N-481	Yellow Zinc
N-481R	Red Painted




mm (inch)

N-5072R
Roof Anchor Bracket

Net weight : 39.5 oz. / 1120 g.

Red Painted





mm (inch)

N-5072F
Roof Anchor Bracket

Net weight : 39.5 oz. / 1120 g.

yellow zinc

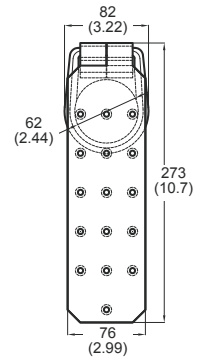


For Flat Surface mm (inch)

N-3035M
Swivel Eye

Forged steel, heat treated
 Net weight : 2.5 oz. / 72 g

yellow zinc

New



mm (inch)

**N-480
Roof Anchor-disposable**

Net weight : 12.6 oz. / 357 g.



mm (inch)

yellow zinc

**N-4805
Roof Anchor**

Net weight : 12.5 oz. / 335 g.



For Flat Surface

yellow zinc



**N-350/N-3501/N-3502
Anchorage Connector**

Overall length : 16" (410mm)

Stainless steel, SUS 304

Min. Breaking load : 5000 lbs / 23 kN

Net weight : 12.9 oz. / 366 g.




mm (inch)

polished

**N-459
Steel Plate**

Net weight : 9.5 oz. / 271 g

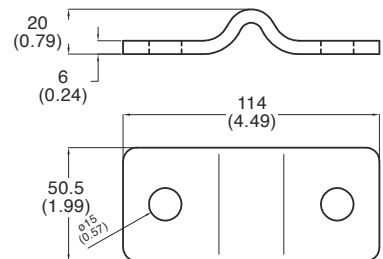


mm (inch)

yellow zinc

**N-5360
Anti-Panic Aluminum Descender**

Stamping aluminum alloy
 Rope size : 10.5 mm to 11mm
 Meets :
 ● EN 341 Class A
 Net weight : 15.0 oz. / 429 g

anodized finish
 (customized colors available)

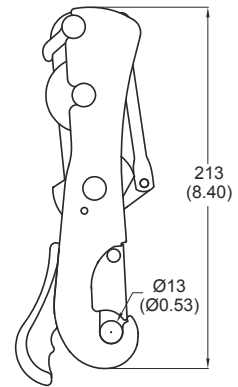


mm (inch)

**N-5300
Handled Ascender - Right Hand**

Stamping aluminum alloy
 Rope size : 9 mm to 12mm
 ● Meets : EN 567
 Net weight : 6.9 oz. / 196 g.

anodized finish
 (customized colors available)

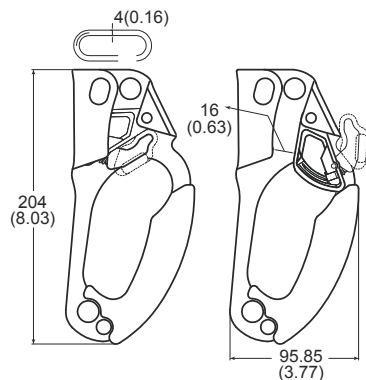


mm (inch)

**N-5302
Handled Ascender - Left Hand**

Stamping aluminum alloy
 Rope size : 9 mm to 12mm
 ● Meets : EN 567
 Net weight : 6.9 oz. / 196 g.

anodized finish
 (customized colors available)

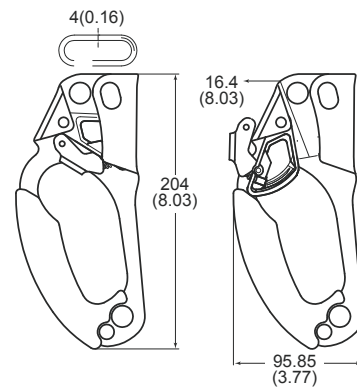


mm (inch)

**N-5306
Chest Ascender**

Stamping aluminum alloy
 Rope size : 9 mm to 12mm
 ● Meets : EN 567
 Net weight : 5.8 oz. / 165 g.


anodized finish
 (customized colors available)

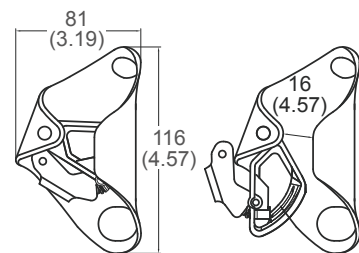

mm (inch)

**N-5320
Fixed Pulley**

Stamping aluminum alloy
 Rope size : Maximum to 12 mm
 Min. breaking load : 20 kN
 Net weight : 3.1 oz. / 88 g.




anodized finish
 (customized colors available)

mm (inch)

**N-5322
Mobile Pulley**

Stamping aluminum alloy
 Rope size : Maximum to 12 mm
 Min. breaking load : 20 kN
 Net weight : 4.1 oz. / 117 g.




anodized finish
 (customized colors available)

mm (inch)

**N-5330
Mobile Pulley**

Stamping aluminum alloy
 Rope size : Maximum to 16 mm
 Min. breaking load : 30 kN
 Net weight : 9.6 oz. / 272 g.




anodized finish
 (customized colors available)

mm (inch)

**N-5332
Mobile Pulley**

Stamping aluminum alloy
 Rope size : Maximum to 16 mm
 Min. breaking load : 30 kN
 Net weight : 16.8 oz. / 476 g.




anodized finish
 (customized colors available)

mm (inch)

**N-5310
Belay Tube**

Forged aluminum alloy
Rope size : 8 mm to 11 mm
Net weight : 2.0 oz. / 58 g.

anodized finish
(customized colors available)

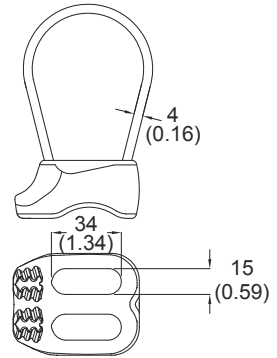


mm (inch)

**N-5312
Belay Tube**

Forged aluminum alloy
Rope size : 8 mm to 11 mm
Net weight : 1.9 oz. / 53 g.

anodized finish
(customized colors available)

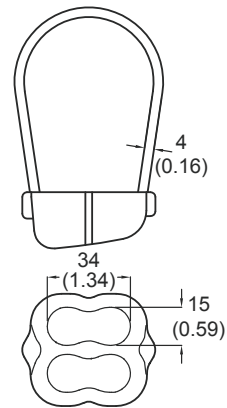

mm (inch)

**N-5350
Swivel**

Forged aluminum alloy
Min. breaking load : 6000 lbs / 30 kN
Net weight : 5.6 oz. / 158 g.


**N-5350B
Swivel With Ball Bearing**

Forged aluminum alloy
Min. Breaking load : 6000 lbs / 30kN
Net weight : 5.7 oz. / 163 g

anodized finish
(customized colors available)



N-5350B

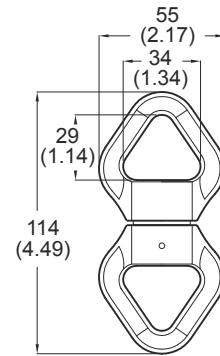


mm (inch)

**N-220
Forged Accessory Hook**

Aluminum alloy
Min. breaking load : 5kN
Net weight : 0.7 oz. / 20 g


anodized clear
(customized colors available)



mm (inch)

**N-5380
Rigging Plate**

Forged aluminum alloy
Min. breaking load : 35 kN
Net weight : 2.3 oz. / 65 g

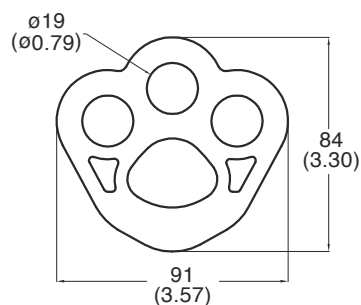


mm (inch)

anodized finish
(customized colors available)

**N-5381
Rigging Plate**

Forged aluminum alloy
Min. breaking load : 35 kN
Net weight : 7.7 oz. / 220 g

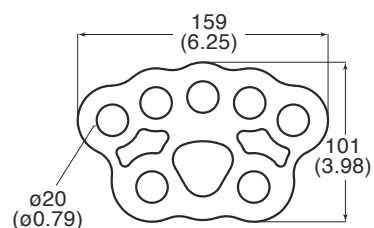


mm (inch)

anodized finish
(customized colors available)

**N-5382
Rigging Plate**

Forged aluminum alloy
Min. breaking load : 45 kN
Net weight : 16.1 oz. / 460 g

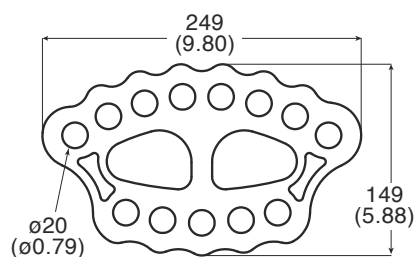


mm (inch)

anodized finish
(customized colors available)

N-505
Figure 8 Descender

Forged aluminum alloy
For Rope : 3/8 " - 5/8 " (9 - 16 mm)
Min. Breaking load : 7500 lbs / 35 kN
Net weight : 4.1 oz. / 116 g.

anodized finish
(customized colors available)




mm (inch)

N-5052
Figure 8 Descender

Forged aluminum alloy
For Rope : 3/8 " - 5/8 " (9 - 16 mm)
Min. Breaking load : 5500 lbs / 25 kN
Net weight : 3.5 oz. / 100 g.

anodized finish
(customized colors available)




mm (inch)

N-506
Big Figure 8 Descender

Forged aluminum alloy
For Rope : 3/8 " - 5/8 " (9 - 16 mm)
Min. breaking load : 9000 lbs / 40 kN
Net weight : 9.5 oz. / 270 g.

anodized finish
(customized colors available)

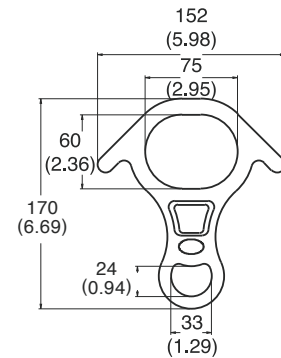


mm (inch)

N-4506
Big Figure 8 Descender

Steel
For Rope : 3/8 " - 5/8 " (9 - 16 mm)
Min. breaking load : 11000 lbs / 50 kN
Net weight : 24.2 oz. / 691 g.


yellow zinc



mm (inch)

S-7786-16
Rigging Screw Jaw and Stud

Stainless steel, SUS 316
 For wire rope : 8mm (5/16")
 Net weight : 32.0 oz. / 908 g.

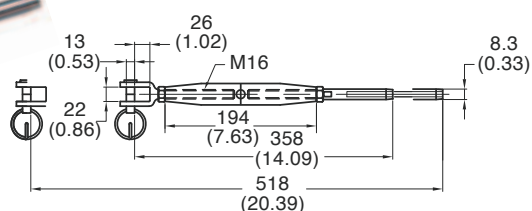


mm (inch)

polished

S-7789-16
Rigging Screw Stud and Stud

Stainless steel, SUS 316
 For wire rope : 8mm (5/16")
 Net weight : 30.0 oz. / 850 g.

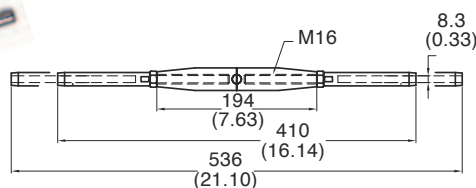


mm (inch)

polished

S-7801-16
Swage Stud (right thread)

Stainless steel, SUS 316
 For wire rope : 8mm (5/16")
 Net weight : 9.0 oz. / 256 g.

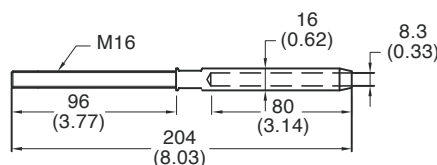


mm (inch)

polished

S-7802-08
Eye Swage Stud

Stainless steel, SUS 316
 For wire rope : 8mm (5/16")
 Net weight : 3.4 oz. / 95 g.

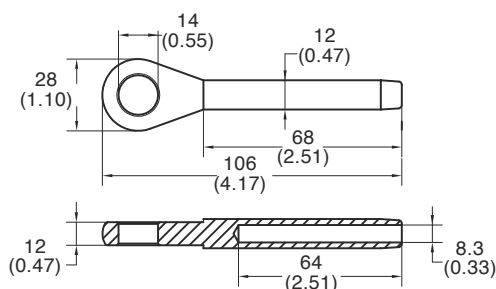


mm (inch)

polished

S-7805-08
Jaw Swage Stud

Stainless steel, SUS 316
 For wire rope : 8mm (5/16")
 Net weight : 7.9 oz. / 223 g.

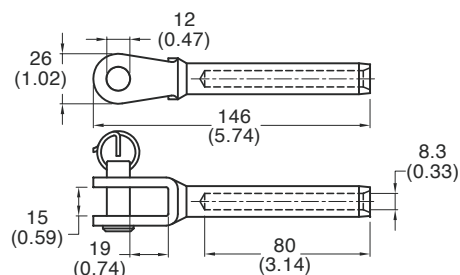


mm (inch)

polished

N-704
Plastic shoulder pad

Colored : Black
Net weight : 1.8 oz. / 51 g.

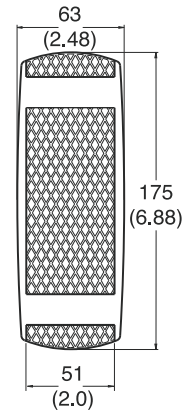


mm (inch)

N-703
Plastic Back pad

Net weight : 2.9 oz. / 83 g.

Art. No.	Color
N-703.black	Black
N-703.red	Red
N-703.blue	Blue
N-703.yellow	Yellow
N-703.trans	Transparent

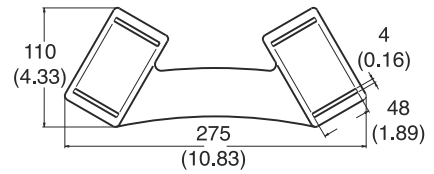


mm (inch)

N-701
Plastic Back pad

Net weight : 1.5 oz. / 44 g.


Art. No.	Color
N-701.black	Black
N-701.red	Red
N-701.blue	Blue
N-701.yellow	Yellow

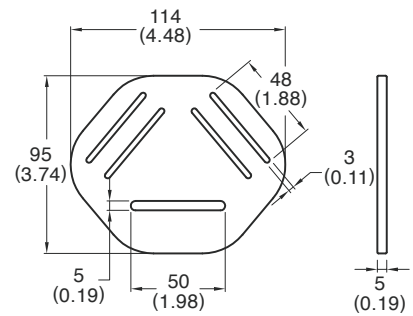

mm (inch)

N-Roller01 / N-Roller02 / N-Roller03 / N-Roller04 / N-Roller05 / N-Roller06 / N-Roller07
Plastic Roller


Art No.	A. Inner Dimension (Ø)	B. Overall Length (mm)
N-Roller01	10	25
N-Roller02	10	51
N-Roller03	12	42
N-Roller04	12	51
N-Roller05	12	65
N-Roller06	12	75
N-Roller07	15	49

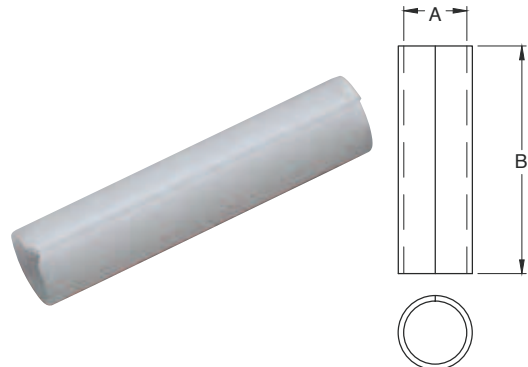

N-710
Plastic Back pad

Net weight : 0.80 oz. / 22 g.


Art. No.	Color
N-710.black	Black
N-710.red	Red
N-710.blue	Blue
N-710.yellow	Yellow

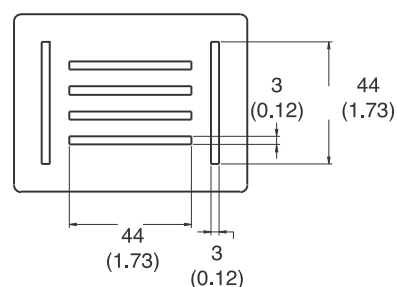

mm (inch)

N-705
Plastic Pad Black

Net weight : 0.4 oz. / 10 g.




mm (inch)

N-706
Plastic Keeper

Net weight : 0.3 oz. / 9 g.

Art. No.	Color
N-706.black	Black
N-706.red	Red
N-706.blue	Blue
N-706.yellow	Yellow




mm (inch)

N-707
Plastic Back pad

Net weight : 0.1 oz. / 3.5 g.

Art. No.	Color
N-707.black	Black
N-707.red	Red
N-707.blue	Blue
N-707.yellow	Yellow




mm (inch)

**N-410
Plastic Thimble**


Net weight : 0.2 oz. / 7 g.

Art. No.	Color
N-410.white	white
N-410.red	Red
N-410.blue	Blue

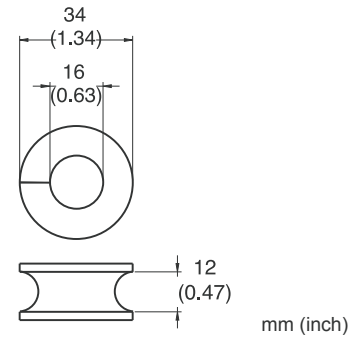

**N-4101
Brass Thimble**


Net weight : 0.21 oz. / 6 g.

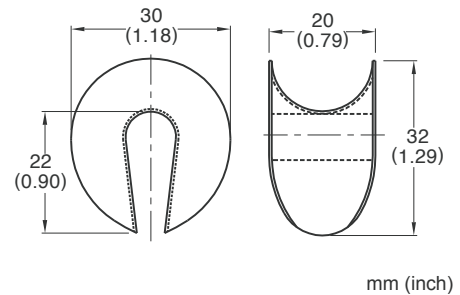

**N-708
Plastic Protector Sleeve**

Net weight : 0.5 oz. / 15 g.


Art. No.	Color
N-708.black	Black
N-708.red	Red
N-708.blue	Blue
N-708.yellow	Yellow

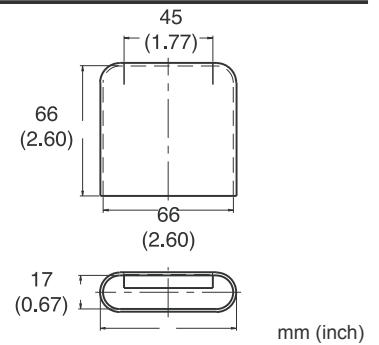

**N-709
Plastic Protector Sleeve**


Net weight : 0.56 oz. / 16 g.

Art. No.	Color
N-709.black	Black
N-709.red	Red
N-709.blue	Blue
N-709.yellow	Yellow

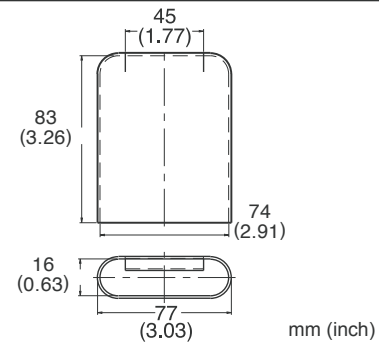

**N-482
Double Lockout Jaw**

Net weight : 4.1 oz. / 117 g.

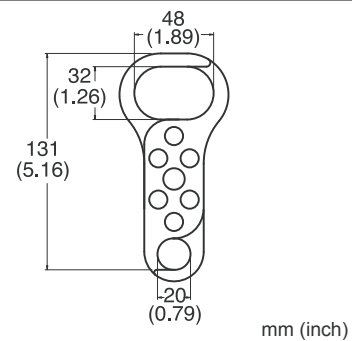

red painted.

INDEX

Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page
N-220	118	N-3040	21	N-402-S	73	N-431-S	73	N-5032	61	N-5871	71
N-244-0	83	N-3040-1	21	N-4021L	32	N-432	31	N-5035	61	N-5877	70
N-244-0-S	76	N-3041	21	N-403	30	N-432-S	73	N-5035/0	61	N-602	106
N-244G	85	N-3049	20	N-403-PVC	54	N-433	44	N-504	62	N-602-12	106
N-245G	82	N-305	14	N-403-S	73	N-433L	44	N-505	120	N-604	106
N-246G	81	N-3056	16	N-403L	31	N-434	39	N-5052	120	N-605	106
N-247G	84	N-3058	20	N-404	34	N-435	40	N-506	120	N-606	106
N-248G	83	N-3059	20	N-404R	34	N-4335	48	N-507	67	N-610	103
N-250G	80	N-306	14	N-405	30	N-436	43	N-5072F	114	N-616	103
N-250GK	80	N-306-S	76	N-406	35	N-437	26	N-5072R	114	N-617	104
N-251G	80	N-314-MX	17	N-407	33	N-438	49	N-508	67	N-618	104
N-252-S	76	N-315	14	N-407L	32	N-439	50	N-509	67	N-619	105
N-252G	81	N-3155	15	N-407R	33	N-439X	50	N-510	67	N-619T	105
N-252GK	81	N-315X	15	N-408	33	N-440	50	N-511	67	N-620	107
N-254G	82	N-3161	16	N-408R	33	N-441	50	N-512	64	N-621	107
N-256-S	76	N-3167	15	N-409	24	N-442	37	N-51428	68	N-622	107
N-256G	84	N-3167/0	15	N-410	124	N-443	46	N-51445	68	N-623	107
N-257G	85	N-318	18	N-4101	124	N-445	30	N-51460	68	N-630	103
N-258G	83	N-325/0	18	N-411	47	N-445L	30	N-518	63	N-636	103
N-259G	86	N-326	18	N-412	46	N-448	45	N-519	63	N-637	104
N-2615G	86	N-350	115	N-413	43	N-449	35	N-5203	64	N-638	104
N-261G	85	N-3501	115	N-4135	43	N-4501	41	N-5204	64	N-639	105
N-263G	83	N-3502	115	N-413X	43	N-4502	41	N-5212	71	N-650	108
N-265G	86	N-351	111	N-414	24	N-4506	120	N-5246	60	N-650B	108
N-267G	84	N-352	111	N-414-S	74	N-451	42	N-5248	60	N-651	108
N-268G	82	N-353	111	N-414R	24	N-452	44	N-5261	58	N-651B	108
N-268G-S	77	N-354	111	N-415	25	N-452L	44	N-5265	62	N-660	109
N-270	92	N-355	112	N-415-PVC	55	N-453	36	N-5265/0	62	N-670	109
N-271	89	N-356	112	N-415-S	74	N-455	27	N-5271	58	N-701	122
N-272	91	N-357	112	N-415R	25	N-459	115	N-5271T	58	N-703	122
N-273	90	N-358	112	N-415X	26	N-460	28	N-528	63	N-704	122
N-274	91	N-3591-S	72	N-416	23	N-460-PVC	56	N-529	63	N-705	123
N-275	92	N-360	19	N-416L	23	N-461	28	N-5300	116	N-706	123
N-2750	94	N-3610	7	N-416L-PVC	55	N-469	28	N-5302	116	N-707	123
N-276	91	N-3610-S	77	N-416L-R	23	N-471	49	N-5306	116	N-708	124
N-277	93	N-3615	11	N-416R	23	N-475	35	N-5310	118	N-709	124
N-278	93	N-3615-S	77	N-417	26	N-476	27	N-5312	118	N-710	123
N-281	89	N-3616	11	N-418	24	N-476R	27	N-5320	117	N-903	113
N-282	92	N-3616-S	77	N-419	25	N-477	26	N-5322	117	N-904	113
N-283	90	N-3617	11	N-419-PVC	55	N-477-PVC	54	N-5360	116	N-904-S	72
N-284	90	N-3618	11	N-419R	25	N-478	28	N-533	68	N-905	113
N-2852	94	N-3620	8	N-420	40	N-479	49	N-5330	117	N-907	113
N-2852G	99	N-3625	8	N-420-S	75	N-479-S	72	N-5332	117	N-DE001	52
N-2853G	99	N-3625/0	8	N-4201	40	N-4797	49	N-5350	118	N-DE002	52
N-2854	94	N-3630	9	N-4203	41	N-480	115	N-5380	119	N-DE005	52
N-2854G	99	N-3630T	10	N-4206	40	N-4805	115	N-5381	119	N-DE006	52
N-2855	95	N-3633	9	N-4207	42	N-481	114	N-5382	119	N-DE007	53
N-2855G	100	N-3658	12	N-4209-PVC	54	N-481R	114	N-540	62	N-DE300	53
N-2857	95	N-3660	12	N-421	41	N-482	124	N-5407	65	N-DE301	53
N-2857G	100	N-3672	7	N-421-S	75	N-483	36	N-5407B	65	N-DE360	53
N-2857/0	95	N-3678	9	N-422	37	N-486	36	N-5416	64	N-Roller01	122
N-2857/0 G	100	N-3710	7	N-422-S	75	N-487	35	N-5439	68	N-Roller02	122
N-2859	96	N-3810	7	N-4224	37	N-489	36	N-5720	65	N-Roller03	122
N-2859G	101	N-3810X	8	N-4226	37	N-4910	46	N-5722	65	N-Roller04	122
N-2868G	101	N-3830	9	N-4229-PVC	54	N-4911	46	N-5740	66	N-Roller05	122
N-287	93	N-3830T	10	N-423	45	N-492	29	N-5741	66	N-Roller06	122
N-3027	13	N-400	47	N-423-S	75	N-492-BT	29	N-5742	66	N-Roller07	122
N-3029	13	N-400/S	47	N-4237	45	N-493	29	N-5748	66	S-7786-16	121
N-3031	19	N-4001	47	N-424	45	N-493-BT	29	N-5860	69	S-7789-16	121
N-3032	13	N-401	38	N-425	48	N-500	59	N-5861	69	S-7801-16	121
N-3033	13	N-4011	38	N-426	48	N-501	59	N-5862	69	S-7802-08	121
N-3035	16	N-4012	38	N-427	48	N-501110	60	N-5867	69	S-7805-08	121
N-3035/0	16	N-4013	39	N-428	39	N-501110X	60	N-5868	70		
N-3035M	114	N-4014	39	N-429	34	N-50130	59	N-5868T	70		
N-3036	19	N-4016	38	N-430	31	N-50130-TR	59	N-5869	71		
N-3039	21	N-402	34	N-430-S	72	N-502	58	N-5869T	70		
N-304	14	N-402-PVC	54	N-431	31	N-503	61	N-5870A	71		



YOKE INDUSTRIAL CORP.

#39, 33rd Road, Taichung Industrial Park,

Taichung 407, TAIWAN

Tel : +886-4-2350-8088

Fax : +886-4-2350-1001

E-mail : info@mail.yoke.net

[http : //www.yoke.net](http://www.yoke.net)



An ISO 9001 Certified Company