

YOKE

YOKE®

Safety is our first priority™

2020

Catalog # N-2020



Safety Components For Fall Protection

Catalog # N-2020





Worldwide Quality Type Approval And Certificate :

SATRA
 Issued to: YOKE Industrial Corp
 P39, 33rd Road
 Taichung Industrial Park
 Taichung 407
 Taiwan, ROC
 SATRA Client: P1321

EC Type-Examination Certificate
 Number 8786 Issue 2
 Date first issued: 21/04/2017

This is to certify that the product group reference 'N-276' comprising the following products:

Product Reference	Description
N-276-D	Aluminium carabiner with self-closing and self-locking gate Gate opening of 23mm Static strength of 24kN
N-276	Aluminium carabiner with self-closing and self-locking gate Gate opening of 22mm Static strength of 24kN
N-276-CP	Aluminium carabiner with self-closing and self-locking gate. Includes a captive pin. Gate opening of 22mm Static strength of 24kN
N-276-TR	Aluminium carabiner with self-closing and self-locking gate Gate opening of 22mm Static strength of 24kN
N-276-TRCP	Aluminium carabiner with self-closing and self-locking gate. Includes a captive pin. Gate opening of 22mm Static strength of 24kN

Classification:
EN 362:2004 Class B

Technical reports:
SATRA: PRC0237789153536, SPC022565021429/10
DQV: 1000008

has been subject to an EC Type-examination in accordance with Article 10 of the PPE Directive (89/686/EEC) and has been shown to satisfy the relevant provisions of this Directive for the complex category through:

- Testing to the following standard: EN 362:2004
- Examination of the relevant technical documentation.

You are therefore licensed to mark the products listed above in accordance with Article 13 of Directive (89/686/EEC) and any relevant amending Directives once you have drawn up an EC declaration of product conformity. Please note that:

- Full details of the certification and product are contained in the manufacturer's technical file
- This certificate is issued subject to the conditions on the reverse side of this certificate
- CE Marking of production is also subject to correct compliance with Directive 89/686/EEC Article 11
- A Where a translation of this certificate exists, the English language version shall be considered as the authoritative text

Signed: Date 21/06/2017
 Signed:
 On behalf of SATRA

SATRA Technology Centre, Wytham Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom

CSA GROUP

Certificate of Compliance

Certificate: 1224981 Master Contract: 211822
 Project: 70212011 Date Issued: 2019-02-28

Issued to: YOKE Industrial Corp
 No. 39, 33rd Rd
 Taichung Industrial Park
 Taichung, 407
 TAIWAN, ROC
 Attention: Connie Lin

The products listed below are eligible to bear the CSA Mark shown with adjacent indicators 'C' and 'US' for Canada and US (indicating that products have been manufactured to the requirements of both Canadian and US Standards) or with adjacent indicator 'US' for US only or without either indicator for Canada only

Issued by: Bernard Liew

PRODUCTS

CLASS - C721130 - OCCUPATIONAL HEALTH AND SAFETY PRODUCTS-Connecting Components - Fall Protection Devices

CLASS - C721131 - OCCUPATIONAL HEALTH AND SAFETY PRODUCTS-Connecting Components for PPE-as Certified to U.S. Sub-

- Classified to Standard CSA Z259.12-16, Class 7211-30; (see Note #1 for more details)
- Class 1 Snap Hooks, Model: N-3659, N-3810, N-3810-ZP, N-4250, N-3610, N-3610-ZP, N-3615, N-3615-ZP, N-3616, N-3616-ZP, N-3617, N-3617-ZP, N-3618, N-3618-ZP, N-3619, N-3710, R3003C2000, N-3626, N-3626-ZP, N-3650B, N-3615-S, N-3616-S, N-3810X, N-3660, N-4265, N-3676, N-3676-ZP, N-3610T, N-3807, N-5271T, N-5271T-S, N-5268, N-DE360, N-5020S, N-21019S, N-200020, N-200020N, N-3620T, N-3633T, N-3620T-ZP, N-3633T-RZP, N-3630T-ZP, N-3801-ZP, N-5271T, N-3660

DNV-GL

MANAGEMENT SYSTEM CERTIFICATE

This is to certify that the management system of
Yoke Industrial Corp.
 No. 39, 33rd Road, Taichung Industrial Park, Taichung, Taiwan, 407
 and the sites as mentioned in the appendix accompanying this certificate

has been found to conform to the Quality Management System standard:
ISO 9001:2015

This certificate is valid for the following scope:

Design, Development and Manufacturing of Grade 80/100 Chain Sling Systems, including Chain, Fittings for Chain, Wire Ropes and Web Sling, Shackles, Snatch Blocks, Swivel Blocks, Turnbuckles, Wire Rope Clou, Used in Offshore, Construction, Material handling and Mining and Safety Components for Personal Safety Purpose, Design, Development and Manufacturing of Shearers for Drilling and Production Hoisting Equipment

For the issuing office:
 DNV GL, Regional Assessment
 Suite P, Prolong, N-4020, Høyanger
 Postboks 100, 4870 Høyanger
 Norway
 TEL: +47 53 274600

For the licensee:
 Yoke Industrial Corp.
 No. 39, 33rd Road
 Taichung Industrial Park
 Taichung, Taiwan, 407

Valid until: 2021-06-30

QMS REGISTERED

Certificate of Registration

APIQ® REGISTRATION NUMBER 0726

This certifies that the quality management system of
YOKE INDUSTRIAL CORP.
 No. 39, 33rd Road
 Taichung Industrial Park
 Taichung
 Taiwan, Republic of China

has been assessed by the American Petroleum Institute Quality Registrar (APIQ®) and found to be in conformance with the following standard:
ISO 9001:2015

The scope of this registration and the approved quality management system applies to the:
 Design and Manufacture of Swage and Spelter Sockets, Shackles, Snatch Blocks, Grade 8/10 Chain Fittings for Chain, Wire Ropes and Webbing Slings for Material Handling System and Safety Components for Personal Safety Purposes

APIQ® approves the organization's justification for excluding:
 No Exclusions Identified as Applicable

Effective Date: JUNE 22, 2018
 Expiration Date: MARCH 30, 2021
 Registered Since: JUNE 22, 2018

Executive Vice President

API REGISTRATION NO. Q1-0467

Certificate of Registration

The American Petroleum Institute certifies that the quality management system of
YOKE INDUSTRIAL CORP.
 No. 39, 33rd Road
 Taichung Industrial Park
 Taichung
 Taiwan, Republic of China

has been assessed by the American Petroleum Institute and found to be in conformance with the following:
API Specification Q1

The scope of this registration and the approved quality management system applies to the:
 Design and Manufacture of Swage and Spelter Sockets, Shackles, Snatch Blocks, Grade 8/10 Chain Fittings for Chain, Wire Ropes and Webbing Slings for Material Handling System and Safety Components for Personal Safety Purposes

API approves the organization's justification for excluding:
 Servicing


Effective Date: JUNE 22, 2018
 Expiration Date: MARCH 30, 2021
 Registered Since: AUGUST 27, 2007

Executive Vice President


Rope Snaps
Rebar Hooks




D Rings
Buckles
Adjusters




Dielectric
Components



Aluminum alloy
& Stainless Steel
Components




Steel &
Aluminum alloy
Carabiners



Rope Grabs



Miscellaneous



Safety is our first priority TM
- Quality, Reliability, Innovation -



Strict Manufacturing, Quality Control, and Testing



YOKE operates a consistent production facility with quality control at every manufacturing stage. From raw materials to the completed product, YOKE's quality meets or exceeds ANSI, CSA and EN specifications.

YOKE is an ISO 9001 certified company and has Type Approval and audit program with CSA Group Testing & Certification Inc. (Canada) and SATRA Technology Centre Ltd. (England).

Test Certificates are included with every shipment from YOKE. These certificates are your assurance of unsurpassed quality.

- **Spectrographic Analysis :**
Ensure proper metallurgy content of all raw materials.
- **Proof Load Testing :**
All safety harness connecting components are 100% proof loaded to 3600 lbs / 16 kN.
- **Ultimate Breaking Load Test :**
Connecting and adjusting components are batch tested for ultimate breaking strength.
 - connecting components - exceed 5000 lbs
 - adjusting components - exceed 4000 lbs

Certificate of Conformance



- **Ultimate Breaking Load Test :**
Connecting and adjusting components are batch tested for ultimate breaking strength.
 - connecting components - exceed 5000 lbs
 - adjusting components - exceed 4000 lbs

Year of manufacture & batch code links to Certificate of Conformance

Forged

PT: proof load tested



Warning on the gate

Y : Manufacturer (YOKE)
5M : 5000 lbs minimum tensile strength.



WARNING
YOKE HARDWARE IN THIS CATALOGUE IS DESIGNED FOR PERSONAL FALL PROTECTION AND IS NOT TO BE USED FOR MATERIAL HANDLING




COMPLETE RANGE OF ANSI/CSA CONNECTORS

The ANSI/CSA standard requires connectors with an integral eye to have gate strength (side and face) of 3600 lbs.


It also requires connectors without an integral eye to have all around gate strength of 3600 lbs (side, face and minor axis).

YOKE offers a full range of these ANSI/CSA compliant connectors:


- Snap Hooks
- Swivel Hooks
- Clevis Snap Hooks
- Indicator Swivel Hooks
- Rebar Hooks
- Swivel Rebar Hooks
- Pole Strap Snap Hooks
- Aluminum Rebar Hooks
- Aluminum Snap Hooks

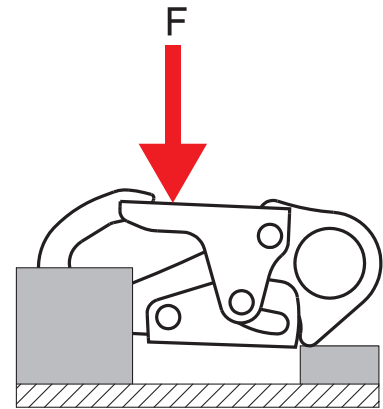

Gate face resistance test

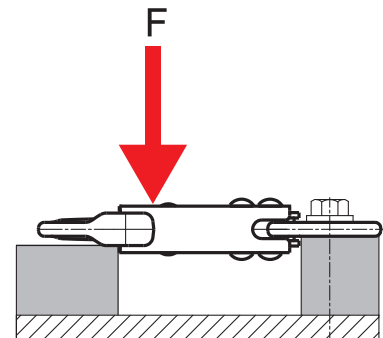

Gate side-load resistance test

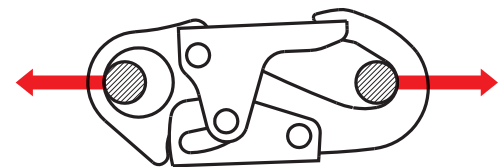


Major axis test



N-3610
Rope Snap Hook
3600 LBS gate strength


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 13.6 oz. / 388 g
Zinc Plated



mm (inch)

N-3810
Stamped Rope Snap Hook
3600 LBS gate strength


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 12.7 oz. / 362 g
Zinc Plated



mm (inch)

N-3810X
Stamped Rope Snap Hook
3600 LBS gate strength



Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 10.6 oz. / 304 g
Zinc Plated

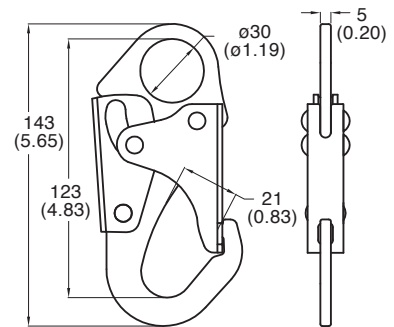

mm (inch)

N-3710
Rope Snap Hook
3600 LBS gate strength



Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 11.7 oz. / 332 g
Zinc Plated



mm (inch)


N-3615
Indicator Swivel Hook
3600 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 17.5 oz. / 501 g
 Indicator Strength Options: ① 500 lbs ② 750 lbs
Zinc Plated

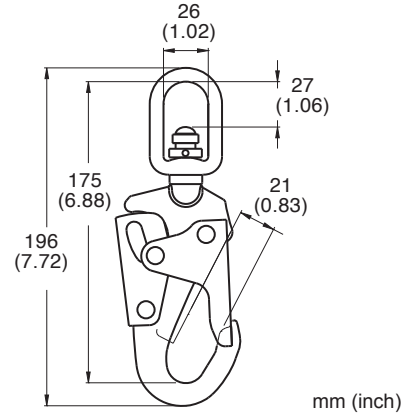


N-3616
Swivel Hook
3600 LBS gate strength
(non-Indicator)

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 17.2 oz. / 490 g
Zinc plated

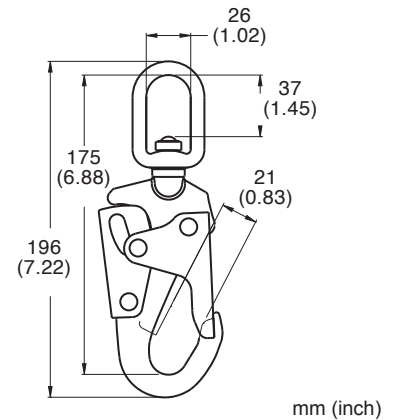


N-3617
Clevis Snap Hook
3600 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 14.0 oz. / 398 g
Zinc Plated

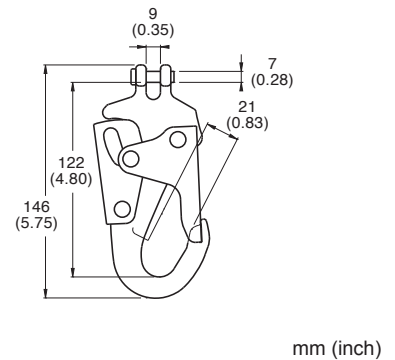


N-3618
Tie Back Snap Hook
5000 LBS gate strength

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 16.0 oz. / 454 g
Zinc Plated

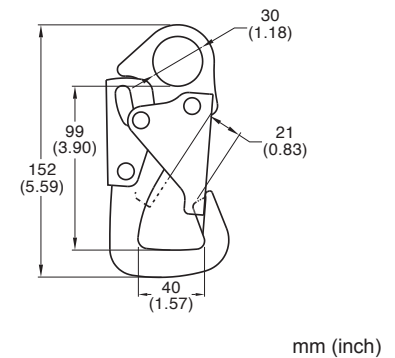

N-3658
Pole Strap Snap Hook
3600 LBS gate strength


Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
● EN 362 : 2004
Net weight : 17.8 oz. / 506 g
Zinc Plated

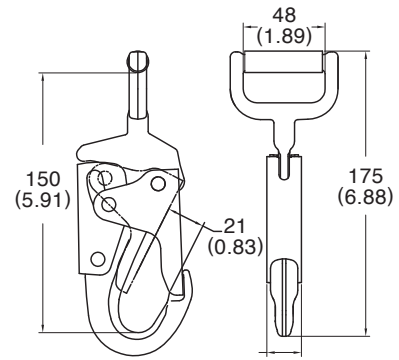

mm (inch)

N-3660
Spreader Snap Hook
3600 LBS gate strength

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
● EN 362 : 2004
Net weight : 25.4 oz. / 728 g
Zinc Plated

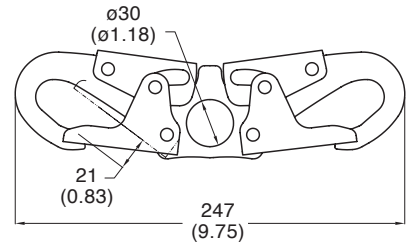

mm (inch)

N-RCT27337
Rebar Chain Assembly

Rebar Hook Gate Opening : 2.55 inch / 64.77 mm
Snap Hook Gate Opening : 0.83 inch / 21.08 mm
Length : 27inch / 685.8 mm
Net weight : 74.1 oz. / 2.1 kg

New


Zinc Plated



**N-3032
Snap Hook**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 10.6 oz. / 303 g

Zinc Plated




mm (inch)

**N-315
Stamped Snap Hook**

Sheet steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 8.4 oz. / 239 g

Zinc Plated

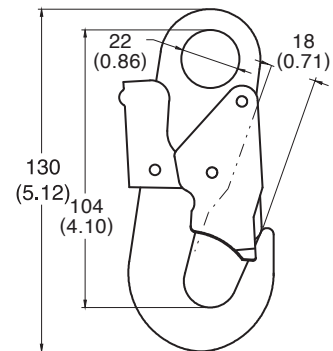


mm (inch)

**N-315X
Stamped Snap Hook**

Sheet steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN362 : 2004
 Net weight : 7.1 oz. / 200 g

Zinc Plated

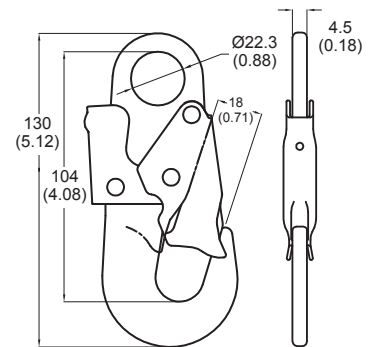


mm (inch)

**N-306
Stamped Snap Hook**

Sheet steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 9.7 oz. / 275 g

Zinc Plated

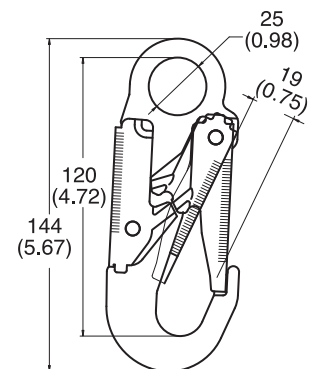


mm (inch)


**N-3035
Indicator Swivel Snap Hook**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 13.9 oz. / 394 g

Zinc Plated



Indicator activation

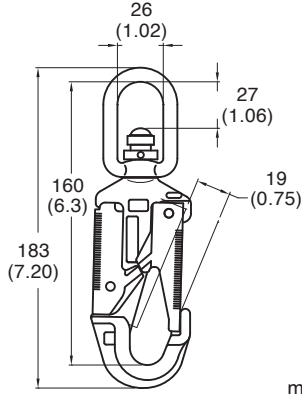


mm (inch)

**N-3035 / 0
Swivel Snap Hook**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 12.9 oz. / 366 g

Zinc Plated

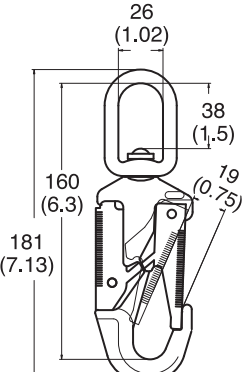

mm (inch)


**N-3167
Indicator Swivel Snap Hook**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 13.2 oz. / 377 g

Zinc Plated



Indicator activation

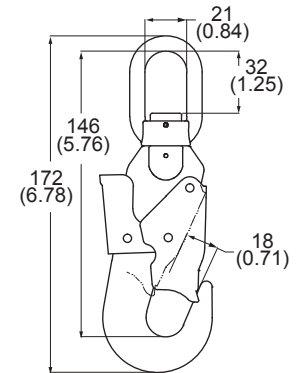


mm (inch)

**N-3167 / 0
Swivel Snap Hook
(non - Indicator)**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 12.9 oz. / 368 g


Zinc Plated

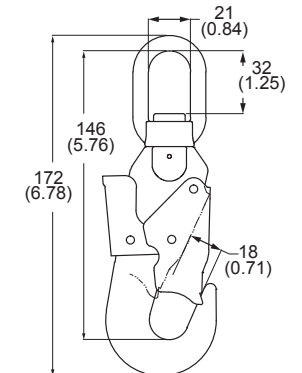

mm (inch)

**N-3033
Snap Hook**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 9.7 oz. / 276 g

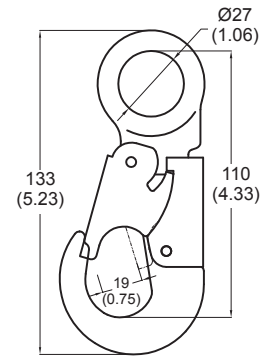


mm (inch)

Zinc Plated

**N-3056
Stamped Snap Hook**

Sheet steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 9.0 oz. / 256 g

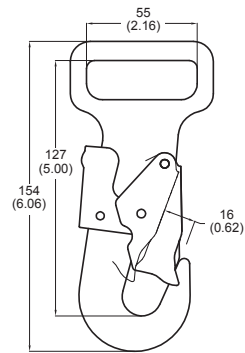


mm (inch)

Zinc Plated

**N-3039
Adjustable Slide Pole Hook**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 6.0 oz. / 170 g

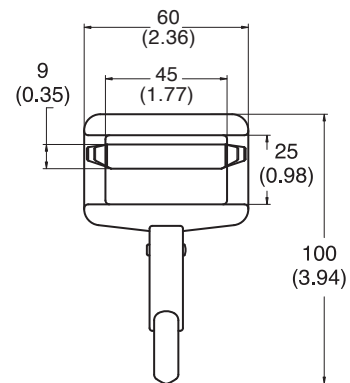


mm (inch)

Zinc Plated

**N-3040
Pole Strap Snap Hook**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 4.1 oz. / 115 g




mm (inch)

Zinc Plated

**N-3040-1
Pole Strap Snap Hook
With Wing Keeper**

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 4.0 oz. / 115 g




Zinc Plated

mm (inch)

**N-3041
Pole Strap Snap Hook
With Wing Keeper**

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 10.9 oz. / 310 g

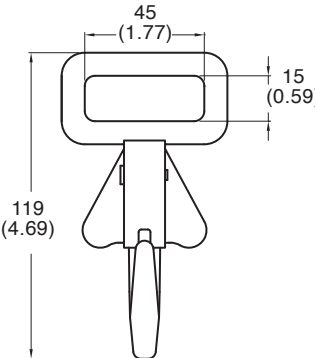


Zinc Plated

mm (inch)

**N-3058
Pole Strap Snap Hook**

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 14.1 oz. / 396 g




Zinc Plated

mm (inch)

**N-3059
Pole Strap Snap Hook**

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 15.5 oz. / 454 g

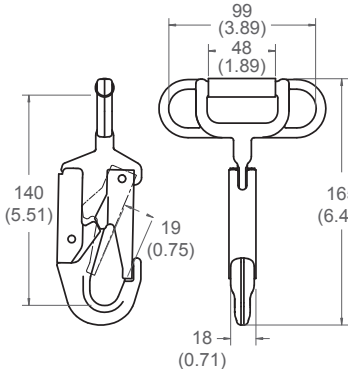


Zinc Plated

mm (inch)

**N-3049
Safety Pole Strap Snap**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 11.4 oz. / 324 g

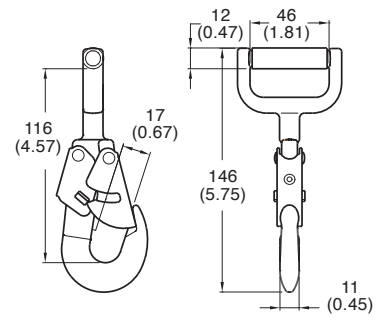


mm (inch)

Zinc Plated

**N-3036
Clevis Snap Hook**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 11.5 oz. / 328 g




mm (inch)

Zinc Plated

**N-3155
Stamped Snap Hook**

Sheet steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 8.8 oz. / 250 g

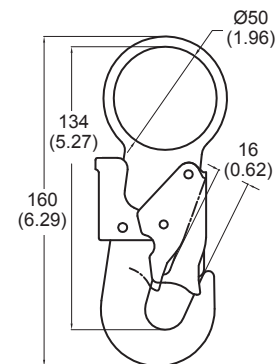


mm (inch)

Zinc Plated

**N-3161
Rope Snap Hook**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 9.4 oz. / 268 g




mm (inch)

Zinc Plated

N-3630T
Rebar Hook
3600 LBS gate / Transverse Load

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 28.5 oz. / 800 g

Zinc Plated

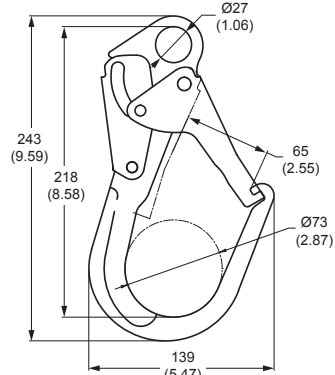


mm (inch)

N-3830T
Stamped Rebar Hook
3600 LBS gate / Transverse Load

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 26.3 oz. / 752 g

Zinc Plated

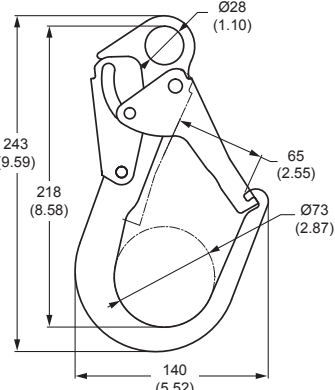


mm (inch)

N-3633T
Indicator Swivel Rebar Hook
3600 LBS gate / Transverse Load

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 30.21 oz. / 823 g

Zinc Plated

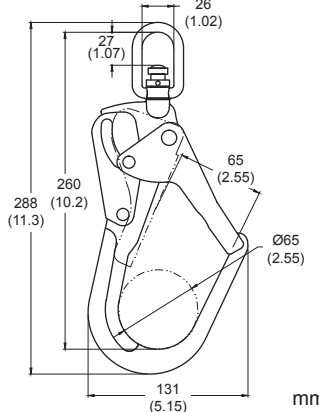


mm (inch)

N-3633T / 0
Swivel Rebar Hook
3600 LBS gate / Transverse Load

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 30.21 oz. / 823 g


Zinc Plated

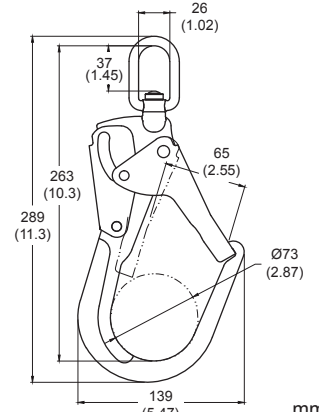

mm (inch)

N-3620T
Ladder Hook
3600 LBS gate / Transverse Load


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 17.99 oz. / 514 g
Zinc Plated

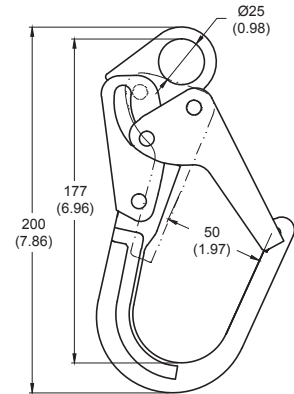

mm (inch)

N-3625T
Indicator Swivel Ladder Hook
3600 LBS gate / Transverse Load

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 22.5 oz. / 638 g
Zinc Plated

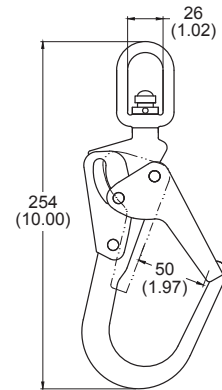


mm (inch)

New

N-3625T / 0
Swivel Ladder Hook
3600 LBS gate / Transverse Load

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 22.86 oz. / 648 g
Zinc Plated

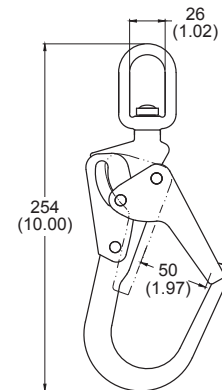


mm (inch)

New

N-3680
Rebar Hook
3600 LBS gate / Transverse Load

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 34.7 oz. / 984g
Zinc Plated

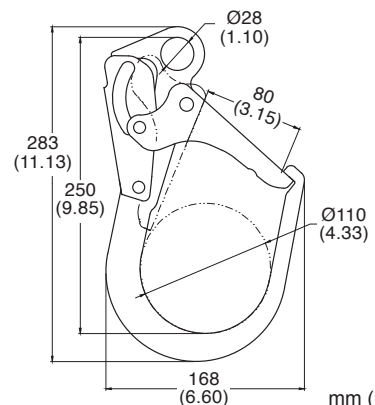

mm (inch)

New

N-314-MX
Rebar Hook
Designed for 2" or small rebar


Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN

- Meets :
 ● EN 362 : 2004

Net weight : 17.6 oz. / 500 g

Part Number	Finish
N-314-ZP	Zinc plated, Polished
N-314-MX	Zinc plated, Matte
N-314-YW	Yellow Zinc plated, Matte

Zinc Plated

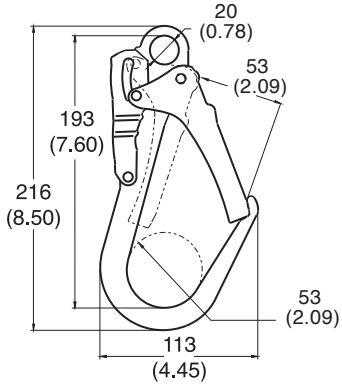

mm (inch)


N-326
Rebar Hook
Designed for 2-1 / 4" rebar

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN

- Meets :
 ● EN 362 : 2004

Net weight : 20.6 oz. / 594 g

Zinc Plated

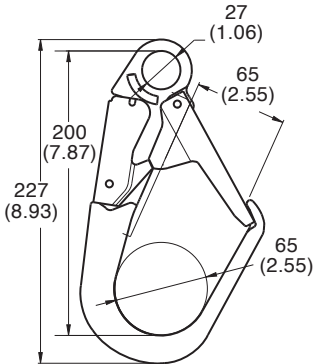

mm (inch)



N-325 / 0
Swivel Rebar Hook
Designed for 2-1 / 4" rebar
(non-indicator)

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN

- Meets :
 ● EN 362 : 2004

Net weight : 24.0 oz. / 680 g

Zinc Plated

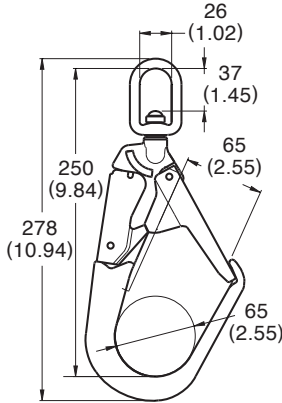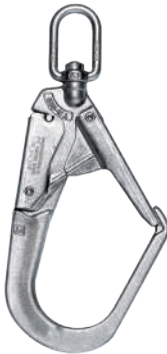

mm (inch)


N-360
Large Capacity Rebar Hook

Steel, heat treated
 Min. breaking load : 5000 lbs / 23 kN

- Meets :
 ● EN 362 : 2004

Net weight : 29.8 oz. / 846 g

Zinc Plated

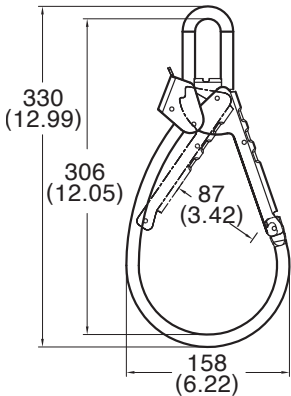


mm (inch)



**N-416L
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.2 oz. / 120 g

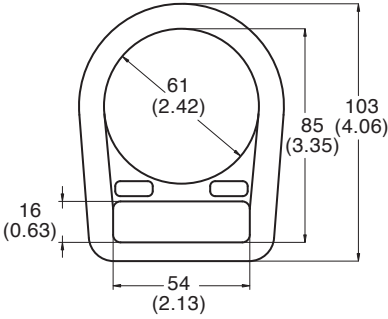


Zinc Plated

Light Weight Designed

mm (inch)

**N-416L-R
Roller D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.3 oz. / 122 g

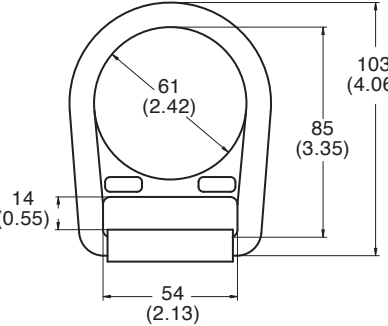


Zinc Plated

mm (inch)

**N-416
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.0 oz. / 142 g

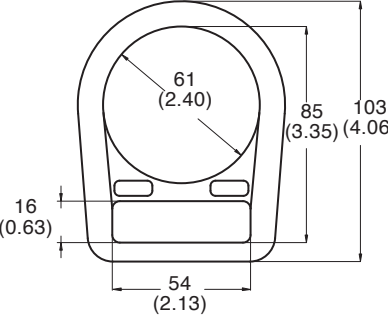


Zinc Plated

mm (inch)

**N-416R
Roller D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.1 oz. / 146 g

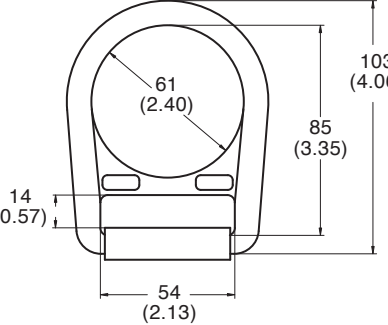


Zinc Plated

mm (inch)

**N-414
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.1 oz. / 145 g

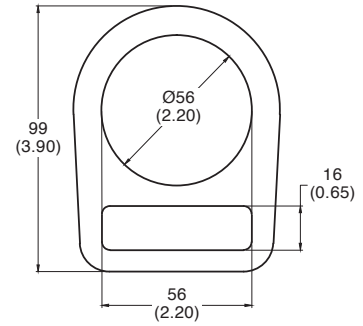


mm (inch)

Zinc Plated

**N-414X
D Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.1 oz. / 117 g

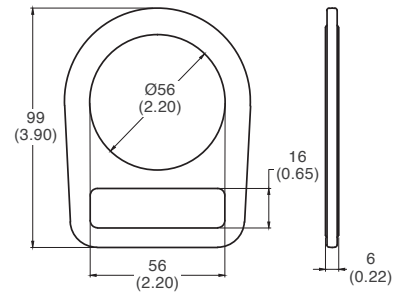


mm (inch)

Zinc Plated

New

**N-414R
Roller D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.2 oz. / 149 g

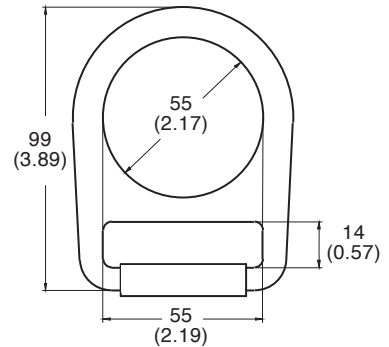


mm (inch)

Zinc Plated

**N-409
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 8.4 oz. / 228 g

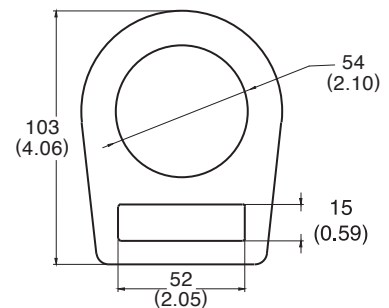


mm (inch)

Zinc Plated

**N-418
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.8 oz. / 112 g


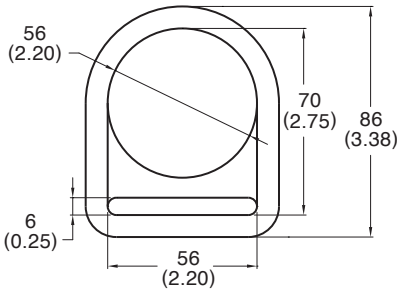


Zinc Plated

mm (inch)

**N-415
Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.0 oz. / 142 g

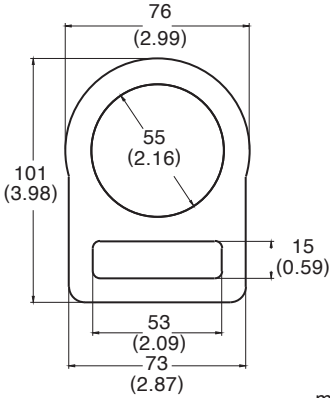



Zinc Plated

mm (inch)

**N-415R
Roller Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.1 oz. / 145 g

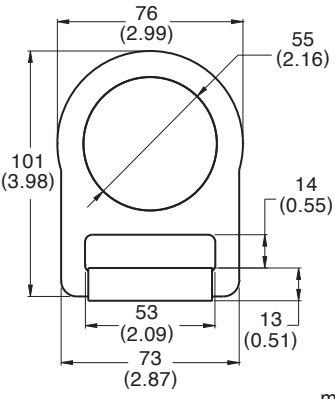



Zinc Plated

mm (inch)

**N-415X
Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.5 oz. / 100 g

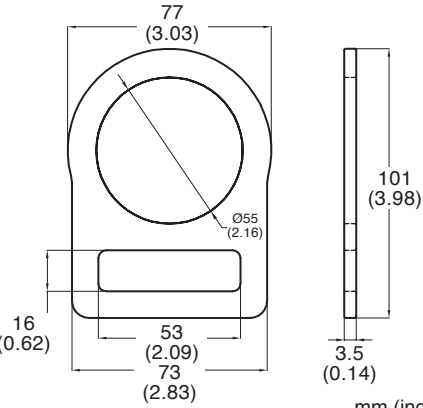


Zinc Plated

mm (inch)

**N-419
Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.8 oz. / 136 g



Zinc Plated

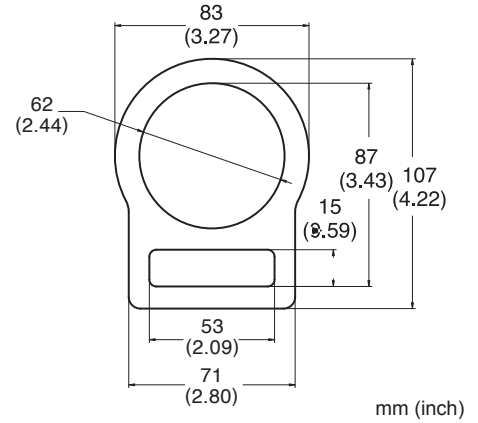

**N-419R
Roller Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.0 oz. / 142 g



Zinc Plated

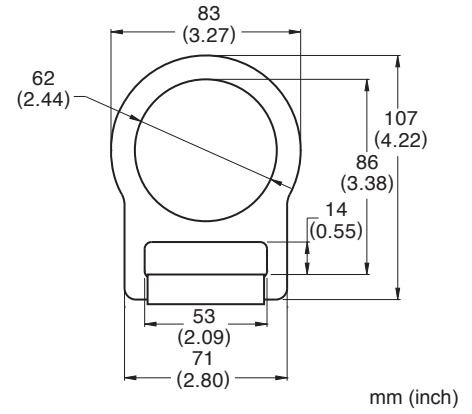

**N-477
Stamped Bent D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.8 oz. / 138 g


Zinc Plated

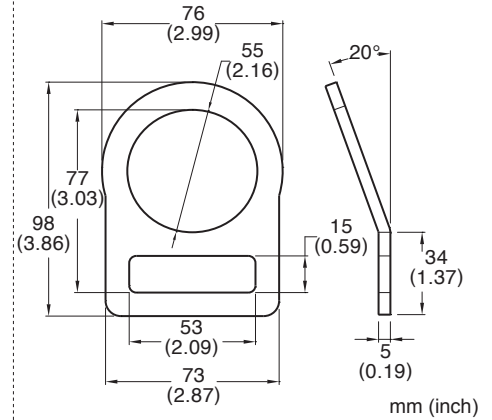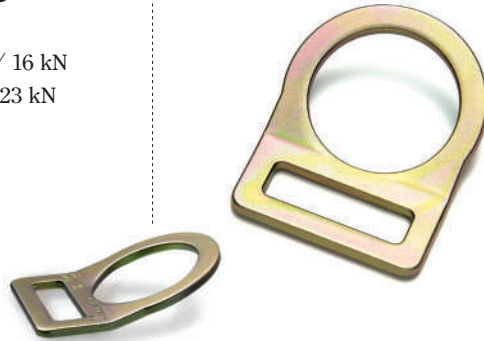

**N-417
D-Ring**


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 8.0 oz. / 227 g

Zinc Plated

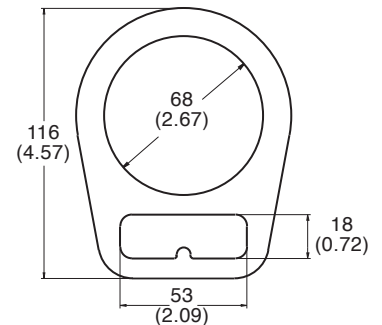

**N-437
Bent D-Ring**


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 7.9 oz. / 225 g

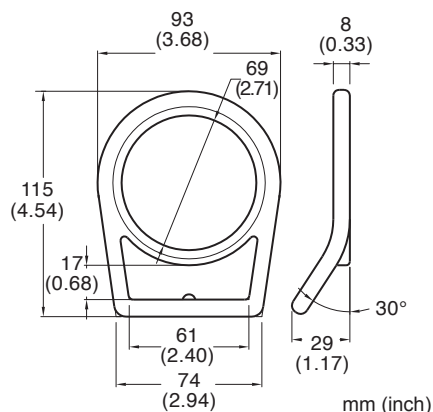

Zinc Plated

**N-476
D-Ring**


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 7.9 oz. / 225 g

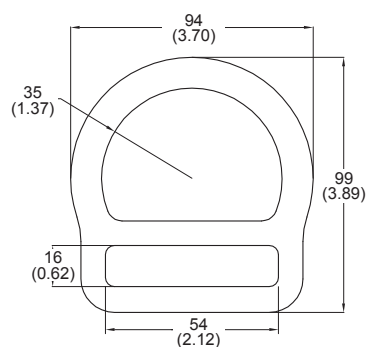

Zinc Plated

**N-476R
Roller D-Ring**



Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 8.0 oz. / 227 g

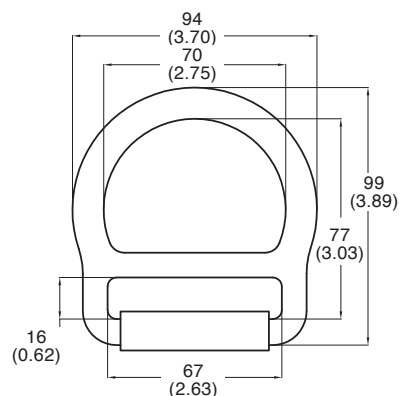

Zinc Plated

**N-455
Stamped D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.2 oz. / 120 g

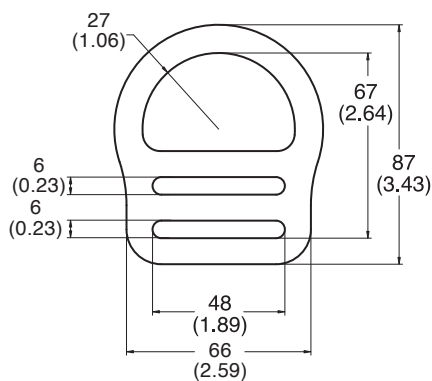

Zinc Plated

**N-4053
3-Bar D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.49 oz. / 99 g

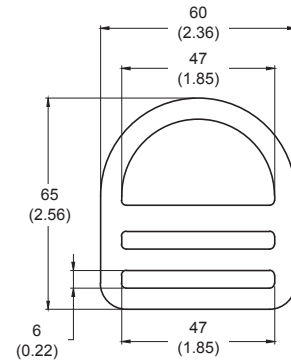


mm (inch)

Zinc Plated

**N-460
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 6.9 oz. / 180 g

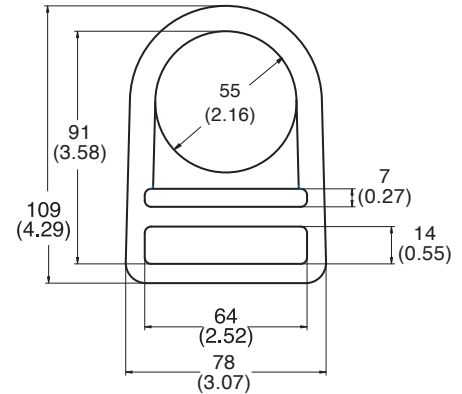


mm (inch)

Zinc Plated

**N-461
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.9 oz. / 170 g

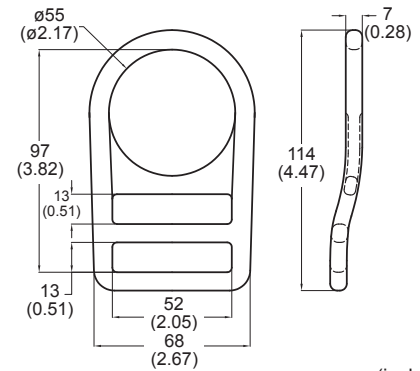


mm (inch)

Zinc Plated

**N-469
D-Ring with Clip**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 9.4 oz. / 269 g

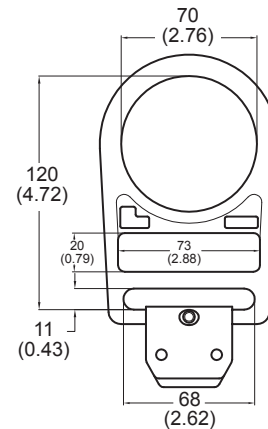


mm (inch)

Zinc Plated

**N-478
Bent D-Ring**



Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.8 oz. / 108 g

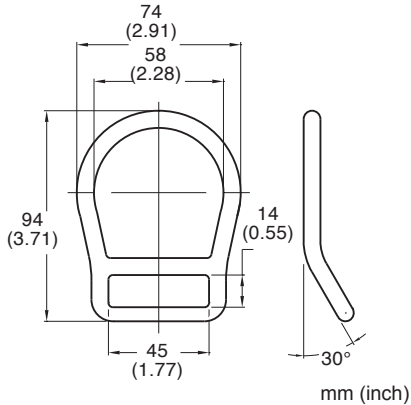

Zinc Plated

**N-493
Stamped D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.78oz. / 79g

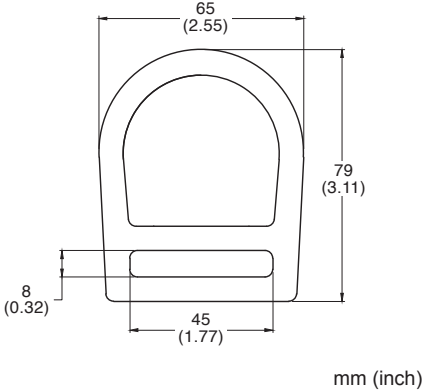

Zinc Plated

**N-493-BT
Stamped Bent D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.78oz. / 79g

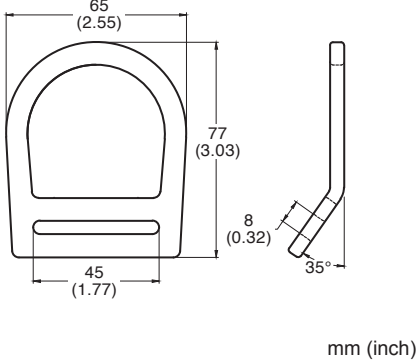

Zinc Plated

**N-492
D-Ring**


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.48oz. / 127g

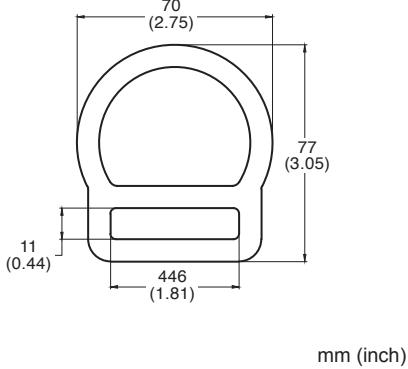

Zinc Plated

**N-492-BT
Bent D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.48oz. / 127g

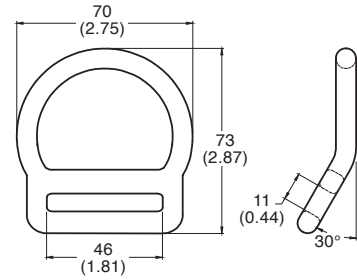

Zinc Plated


mm (inch)

**N-403XL
D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.5 oz. / 71 g



Light Weight Designed

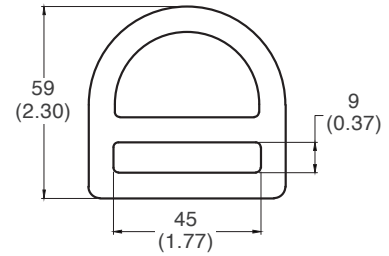


Zinc Plated

mm (inch)

New

**N-403L
Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.8 oz. / 78 g

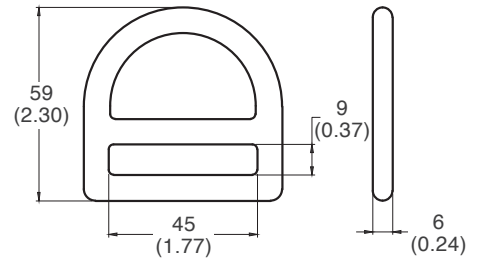


Zinc Plated

mm (inch)

**N-403
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.8 oz. / 80 g

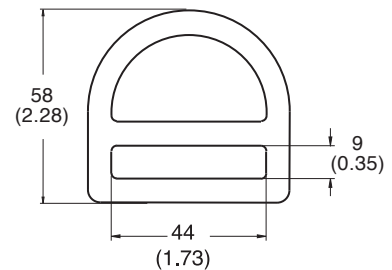


Zinc Plated

mm (inch)

**N-445
Bent D-Ring**


Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 3.1 oz. / 90 g

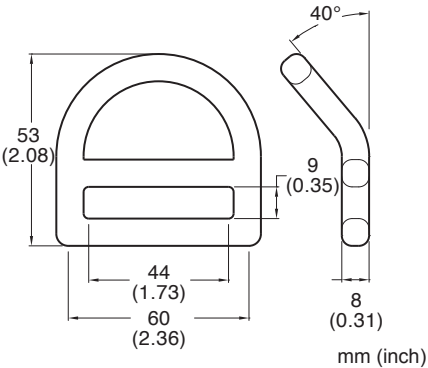

Zinc Plated

**N-445L
Stamped Bent D-Ring**


Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 2.8 oz. / 80 g

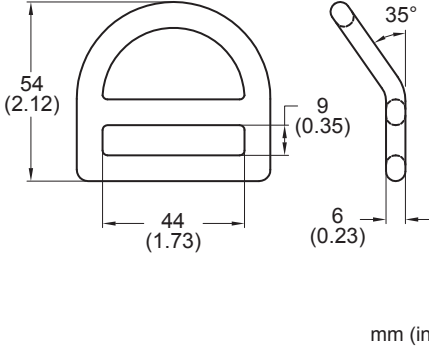

Zinc Plated

**N-430
Stamped D-Ring, with bar**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.1 oz. / 90 g


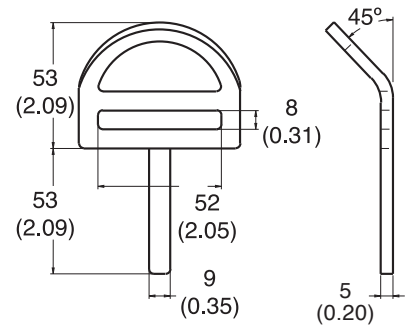


Zinc Plated

mm (inch)

**N-432
Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.8 oz. / 80 g

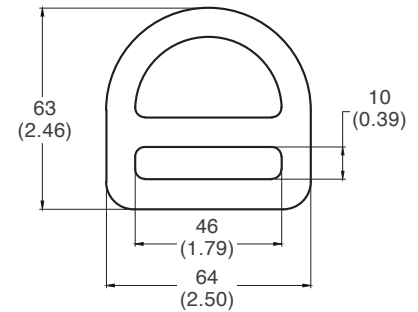


Zinc Plated

mm (inch)

**N-431
Stamped Bent D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.8 oz. / 80 g

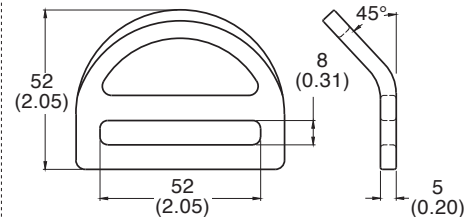


Zinc Plated

mm (inch)

**N-405
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.1 oz. / 88 g

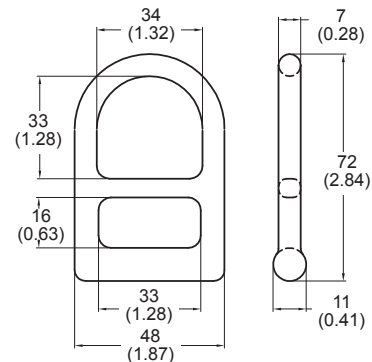


Zinc Plated

mm (inch)

**N-4052
Stamped Bent D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.97 oz. / 141 g

Zinc Plated

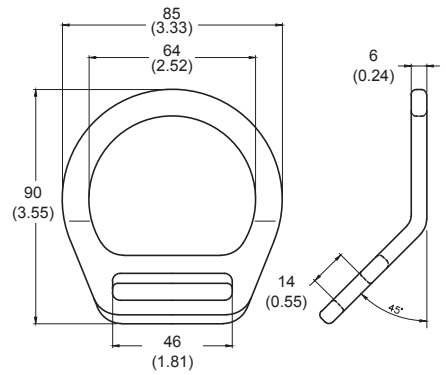


mm (inch)

**N-407L
Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.8 oz. / 78 g

Zinc Plated

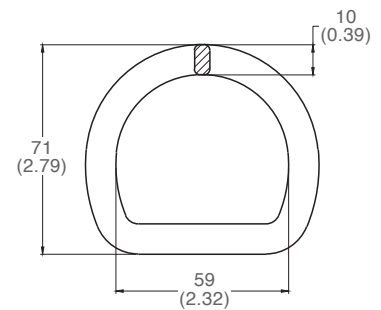


mm (inch)

**N-4021L
Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.8 oz. / 80 g

Zinc Plated

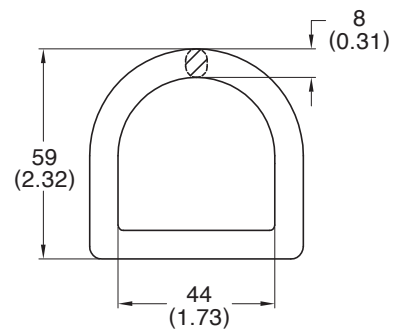


mm (inch)

**N-2817
D Ring with Bracket Weldment**

Sheet steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets:
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 9.5 oz. / 268 g

yellow zinc


New

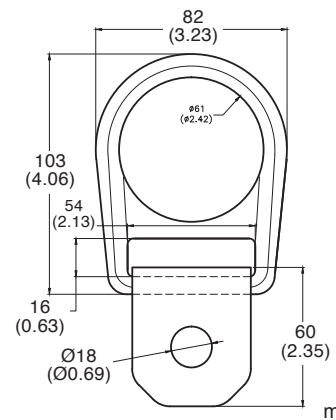

mm (inch)

**N-407
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.4 oz. / 126 g




Zinc Plated

mm (inch)

**N-407R
Roller D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.5 oz. / 129 g

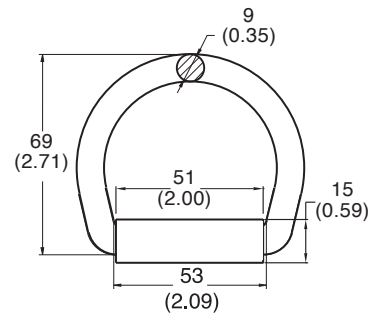


Zinc Plated

mm (inch)

**N-408
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.3 oz. / 150 g




Zinc Plated

mm (inch)

**N-408R
Roller D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.4 oz. / 153 g

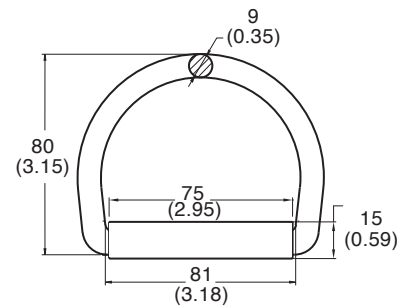


Zinc Plated

mm (inch)

**N-402
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.0 oz. / 86 g




Zinc Plated

mm (inch)

**N-402W
Welded D-Ring**

Steel
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 2.33 oz. / 66 g




Zinc Plated

mm (inch)

**N-404
Stamped D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.5 oz. / 70 g




Zinc Plated

mm (inch)

**N-404R
Stamped Roller D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.8 oz. / 77 g




Zinc Plated

mm (inch)

**N-429
Delta D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.6 oz. / 45 g

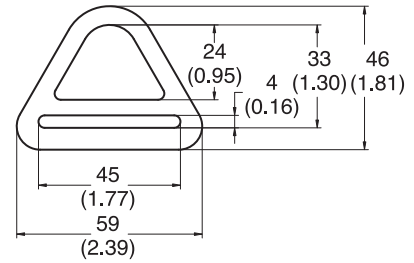


Zinc Plated

mm (inch)

**N-475
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.2 oz. / 120 g

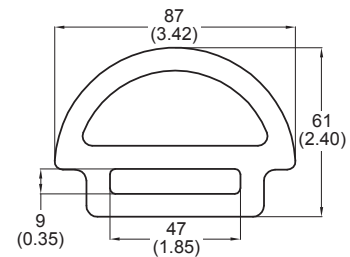


Zinc Plated

mm (inch)

**N-449
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.1 oz. / 60 g

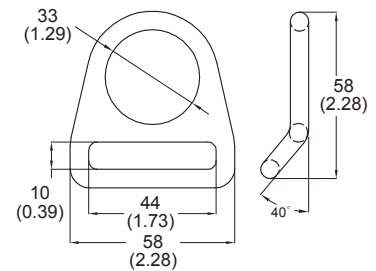


Zinc Plated

mm (inch)

**N-406
D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.0 oz. / 120 g




Zinc Plated

mm (inch)

**N-487
Stamped O Ring**

Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 2.0 oz. / 57 g




Zinc Plated

mm (inch)

**N-486
O Ring**

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 2.1 oz. / 60 g




Zinc Plated

mm (inch)

**N-453
O Ring**

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 5.0 oz. / 150 g




Zinc Plated

mm (inch)

**N-483
O Ring**

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 5.2 oz. / 146 g




Zinc Plated

mm (inch)

**N-489
O Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 7.0 oz. / 198 g




Zinc Plated

mm (inch)

**N-422
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.0 oz. / 28 g

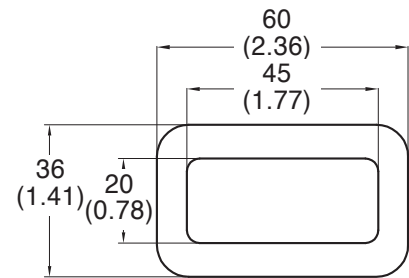


Zinc Plated

mm (inch)

**N-4226
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.4 oz. / 39 g

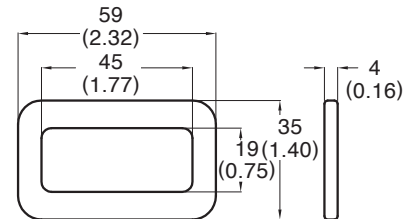


Zinc Plated

mm (inch)

**N-4224
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.9 oz. / 55.2 g

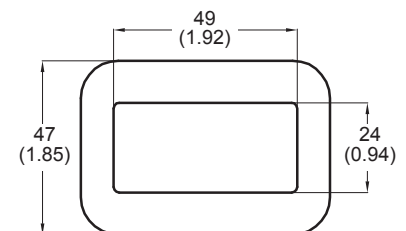


Zinc Plated

mm (inch)

**N-442
Loop Adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 0.6 oz. / 17 g

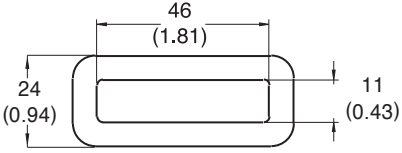


Zinc Plated

mm (inch)

**N-401
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.9 oz. / 54 g





Zinc Plated

*Supplied without sliding pin

mm (inch)

**N-4011
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.3 oz. / 38 g

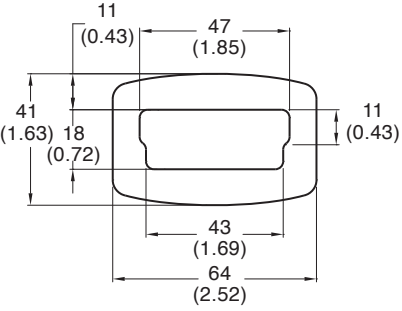


Zinc Plated

mm (inch)

**N-4012
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.9 oz. / 55 g


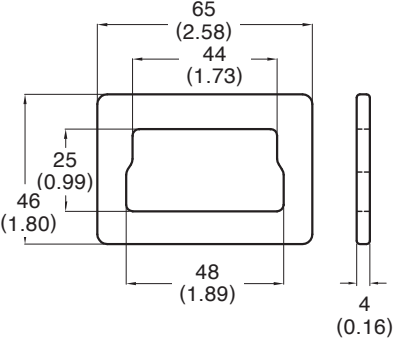


Zinc Plated

mm (inch)

**N-4016
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.9 oz. / 53 g

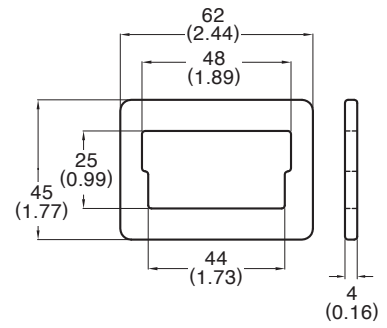


Zinc Plated

mm (inch)

**N-4013
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.3 oz. / 37 g

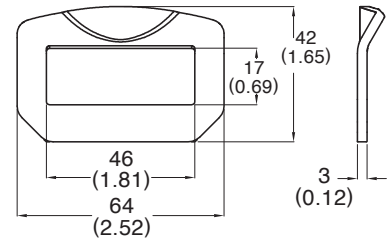


Zinc Plated

mm (inch)

**N-4014
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 0.8 oz. / 23 g

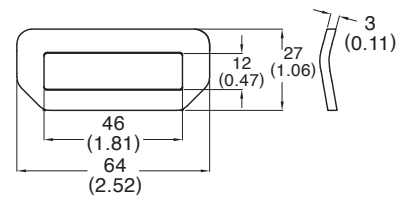


Zinc Plated

mm (inch)

**N-428
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 0.5 oz. / 15 g

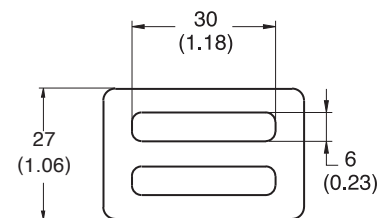


Zinc Plated

mm (inch)

**N-434
Stamped Adjuster**

Sheet steel, heat treated
 Min. Breaking Load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.4 oz. / 41 g

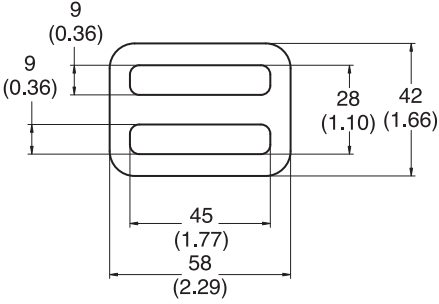


Zinc Plated

mm (inch)

**N-420
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.0 oz. / 27 g

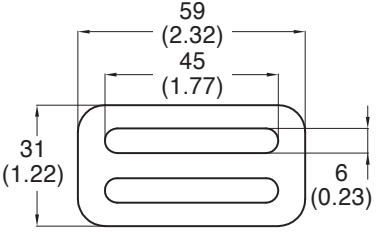


Zinc Plated

mm (inch)

**N-4201
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.3 oz. / 38 g




Zinc Plated

mm (inch)

**N-4206
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.4 oz. / 40 g

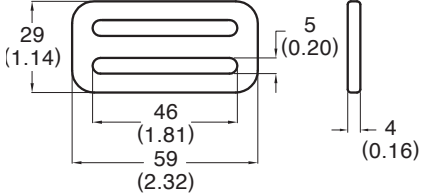


Zinc Plated

mm (inch)

N-435
Slide Buckle -Non-Rated

Sheet steel, heat treated
Min. Tensile strength : 40 lbs / 0.18 kN
Net weight : 0.5 oz. / 13 g

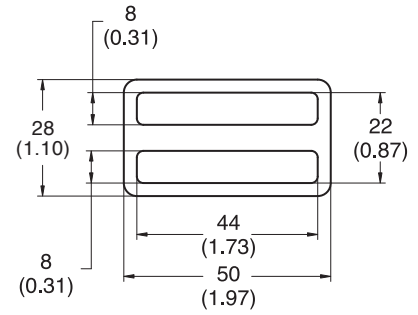


Zinc Plated

mm (inch)

N-421
Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 1.3 oz. / 36 g

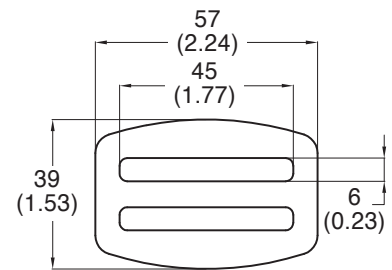


Zinc Plated

mm (inch)

N-4203
Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 1.3 oz. / 36 g

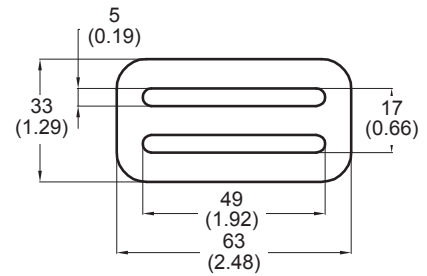


Zinc Plated

mm (inch)

N-4501
Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 2.5 oz. / 70 g

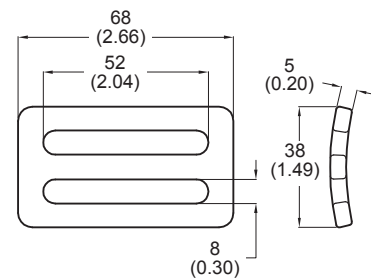


Zinc Plated

mm (inch)

**N-4502
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.3 oz. / 66 g




Zinc Plated

mm (inch)

**N-4207
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.0 oz. / 28 g

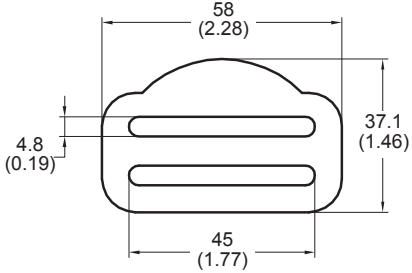


Zinc Plated

mm (inch)

**N-451
Oval Adjuster**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.9 oz. / 60 g

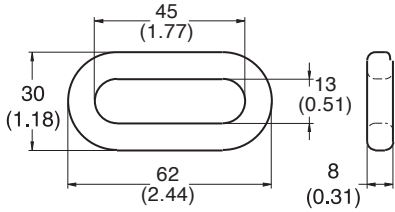


Zinc Plated

mm (inch)

**N-413
Adjuster**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 6.1 oz. / 170 g

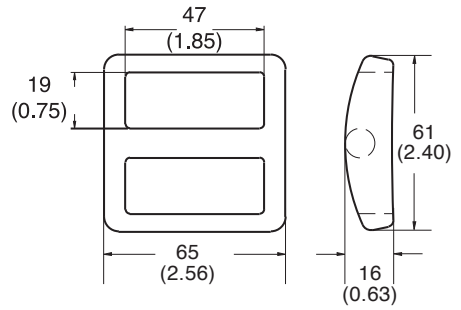


Zinc Plated

mm (inch)

**N-413X
Adjuster**

Sheet steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.5 oz. / 100 g





Zinc Plated

mm (inch)

**N-4135
Adjuster**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.9 oz. / 110 g

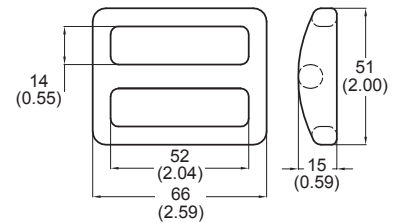


Zinc Plated

mm (inch)

**N-436
Quick Buckle**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.3 oz. / 65 g

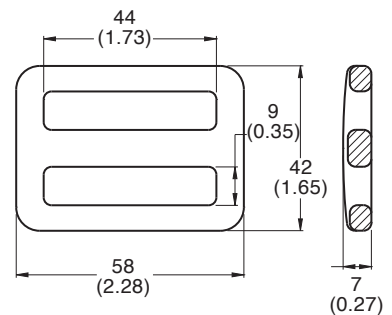


Zinc Plated

mm (inch)

**N-452
Adjuster**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.6 oz. / 46 g

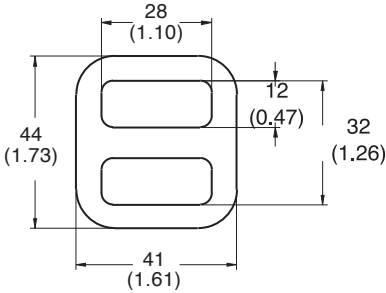


Zinc Plated

mm (inch)

**N-452L
Stamped Adjuster**

Sheet steel, heat treated
 Min. Breaking Load : 5000lbs / 23kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.9 oz. / 53 g




Zinc Plated

mm (inch)

**N-433
Adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.4 oz. / 95 g


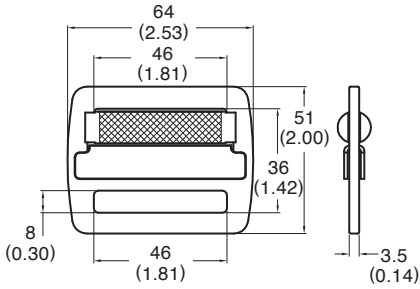


Zinc Plated

mm (inch)

**N-433L
Adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.2 oz. / 90 g

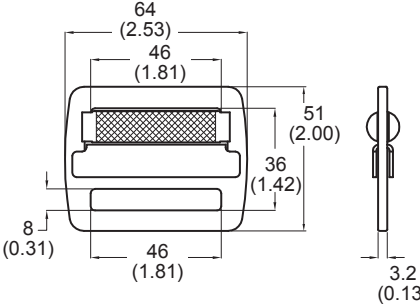


Zinc Plated

mm (inch)

**N-448
Offset Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.8 oz. / 51 g

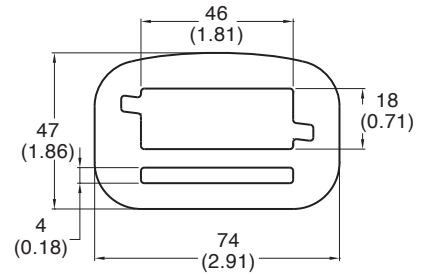


Zinc Plated

mm (inch)

**N-423
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.8 oz. / 51 g





Zinc Plated

mm (inch)

**N-424
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.2 oz. / 35 g




Zinc Plated

mm (inch)

**N-4237
Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.8 oz. / 50 g

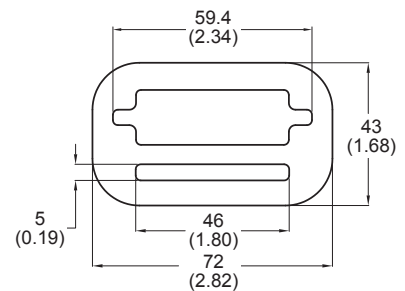


Zinc Plated

mm (inch)

**N-412
Adjuster**

Forged steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.1 oz. / 88 g

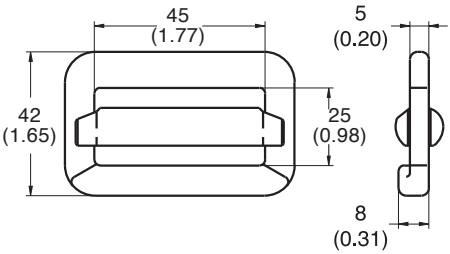


Zinc Plated

mm (inch)

**N-4910
Adjuster Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 0.9 oz. / 28 g

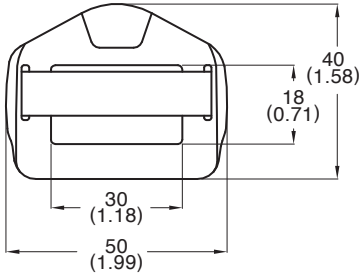


ED Black

mm (inch)

**N-4911
Adjuster Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.5 oz. / 45 g

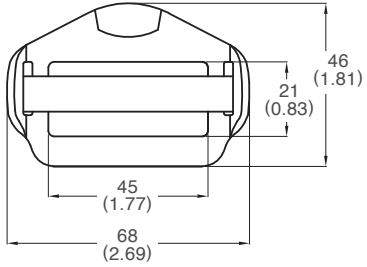


ED Black

mm (inch)

**N-4940-BZP
Quick Buckle**

Sheet steel, heat treated
 Net weight : 0.6 oz. / 16 g




Black Zinc

mm (inch)

New

**N-4941
Quick Buckle**

Sheet steel, heat treated
Net weight : 1.0 oz. / 29 g





Yellow Zinc

New

mm (inch)

**N-443
Adjuster Buckle**

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 1.8 oz. / 50 g

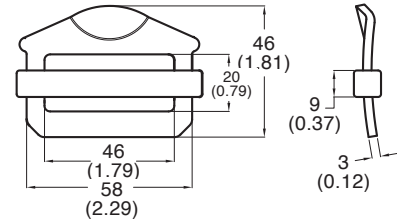



Zinc Plated

mm (inch)

**N-400
Adjuster**

Sheet steel, heat treated
 Min. Breaking Load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.3 oz. / 93 g

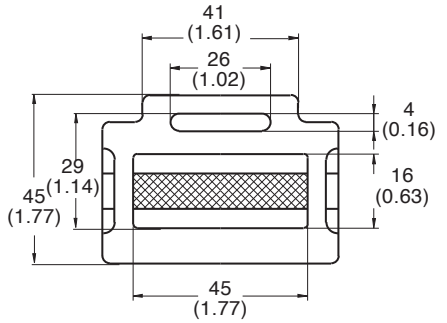



Zinc Plated

mm (inch)

**N-400 / S
Adjuster with spring**

Sheet steel, heat treated
 Min. Breaking Load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.4 oz. / 96 g

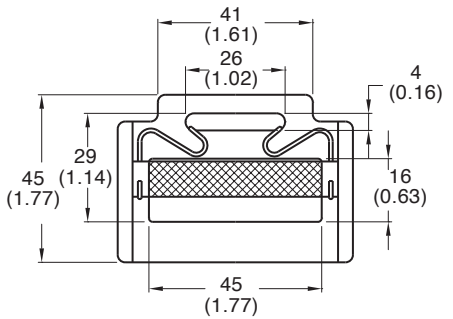



Zinc Plated

mm (inch)

**N-4001
Adjuster**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.8 oz. / 80 g

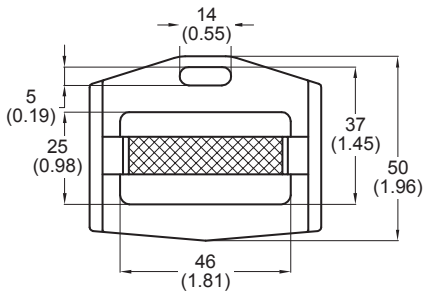


Zinc Plated

mm (inch)

**N-411
Adjuster D-Ring**

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.2 oz. / 118 g

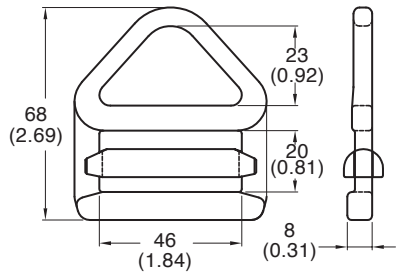

Zinc Plated

mm (inch)

N-4335

**Bent Adjuster Buckle
with silding bar adjuster**

Sheet steel, heat treated



Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.8 oz. / 78 g

Zinc Plated

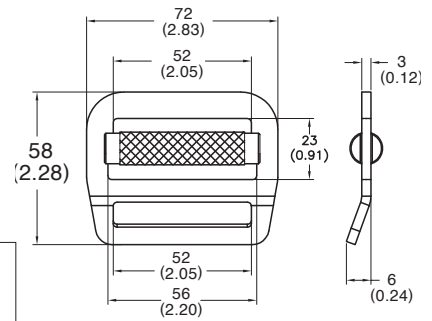

mm (inch)

N-425

**Adjuster Buckle
with silding bar adjuster**

Sheet steel, heat treated



Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.4 oz. / 67 g

Zinc Plated

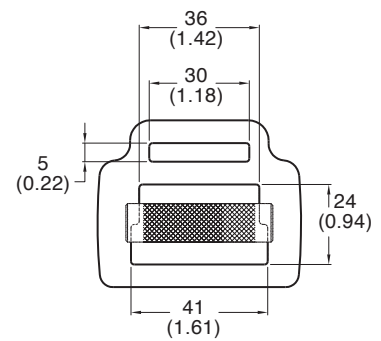

mm (inch)

N-426

**Bent Adjuster Buckle
with silding bar adjuster**

Sheet steel, heat treated



Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.1 oz. / 88 g

Zinc Plated

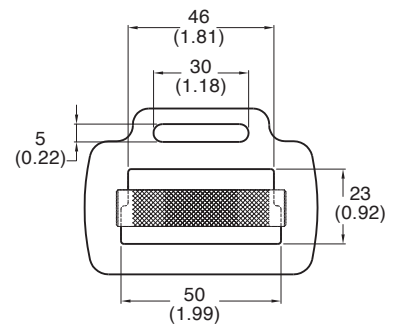

mm (inch)

N-427

**Adjuster Buckle
with silding bar adjuster**

Sheet steel, heat treated


Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.2 oz. / 90 g.

Zinc Plated

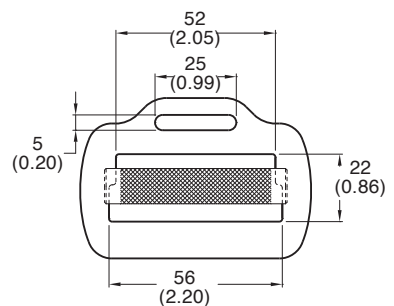


mm (inch)

N-4797

Extra Lock QR Buckle

Sheet steel, heat treated
 Min. Breaking Load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.5 oz. / 156 g
Patent US 9578929


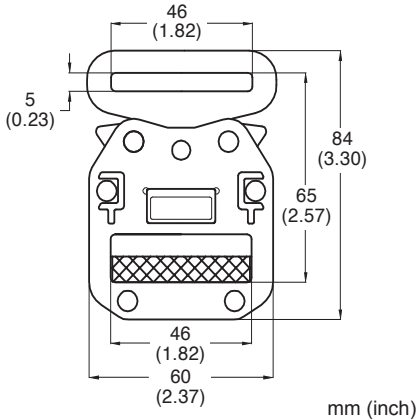


Zinc Plated

N-479

QRA Buckle (Adjust Buckle)

Sheet steel, heat treated
 Min. Breaking Load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.3 oz. / 122 g
Patent Pending

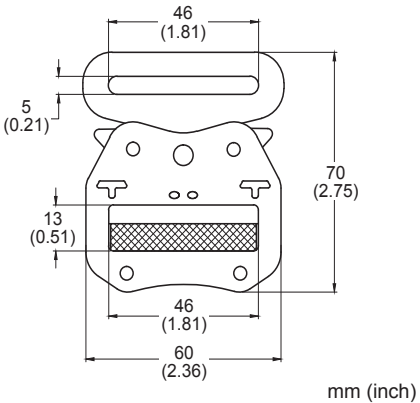


Zinc Plated

N-4793

QRA Buckle (Adjust Buckle)

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.5 oz. / 127 g
Patent Pending

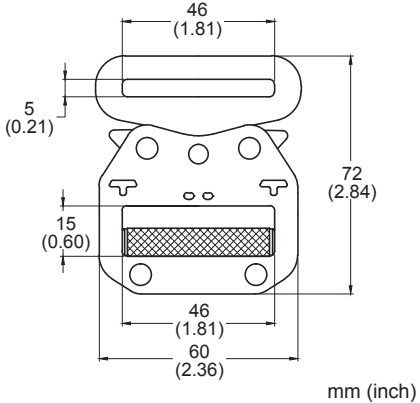


Zinc Plated

N-438

Safety Buckle with bayonet catch

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 6.3 oz. / 180 g


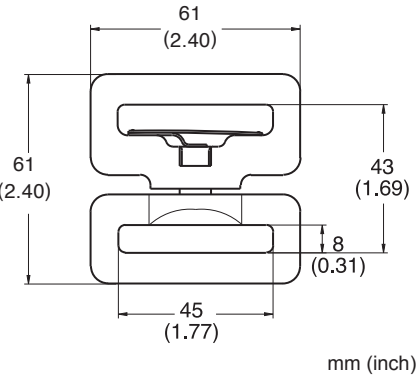


Zinc Plated

N-439X
Stamped Tongue Buckle, 1-7/8"

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.7 oz. / 78 g

Zinc Plated

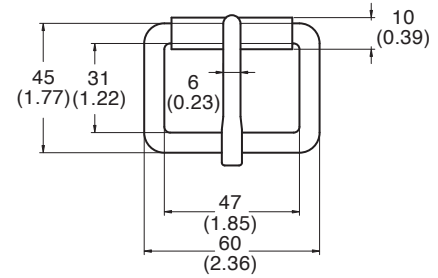



mm (inch)

N-439
Tongue Buckle, 1-7/8"

Forged steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.5 oz. / 99 g

Zinc Plated

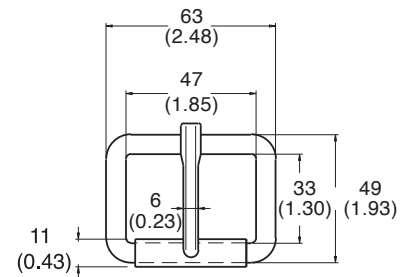


mm (inch)

N-441
Tongue Buckle, 2"

Forged steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.3 oz. / 96 g

Zinc Plated


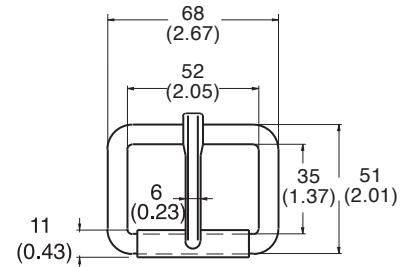


mm (inch)

N-440
Twin Tongue Buckle, 2"

Forged steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.0 oz. / 115 g

Zinc Plated

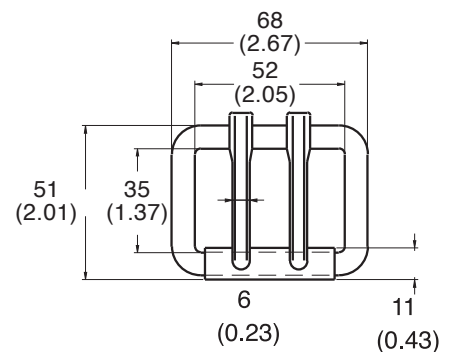

mm (inch)




**N-DE244-0
Dielectric Carabiner**

Alloy steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets:
 ● EN 362 : 2004
 Minimum 4kV Dielectric Resistance
 Net weight : 5.7 oz. / 163 g
Patent Pending


New

Plastic Over Molded

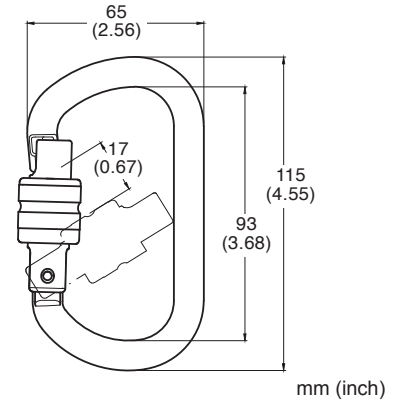

**N-DE360
Dielectric ANSI Rope Snap Hook**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Minimum 9kV Dielectric Resistance
 Net weight : 14.2 oz. / 404 g
Patent Pending




Plastic Over Molded

mm (inch)

**N-DE301
Dielectric Rebar Hook**

Forged steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN362 : 2004
 Minimum 9kV Dielectric Resistance
 Net weight : 19.2 oz. / 548g
Patent US 9199105

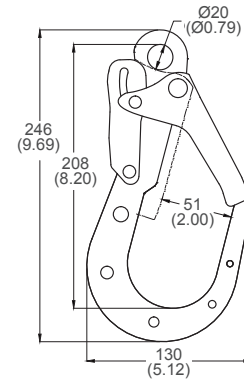


Plastic Over Molded

mm (inch)

**N-DE300
Dielectric Snap Hook**

Sheet steel, heat treated
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN362 : 2004
 Minimum 9kV Dielectric Resistance
 Net weight : 9.2 oz. / 264 g
Patent US 9199105




Plastic Over Molded

mm (inch)

**N-DE001
Dielectric D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 9kV Dielectric Resistance
 Net weight : 5.8 oz. / 164 g

Plastic Over Molded

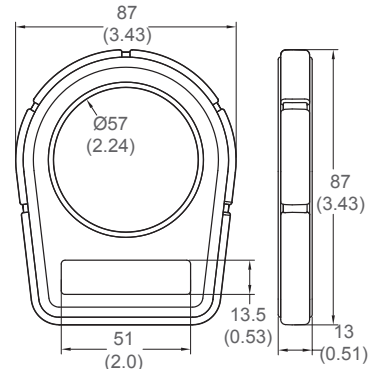


mm (inch)

**N-DE002
Dielectric Bent D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 9kV Dielectric Resistance
 Net weight : 6.1 oz. / 176 g

Plastic Over Molded

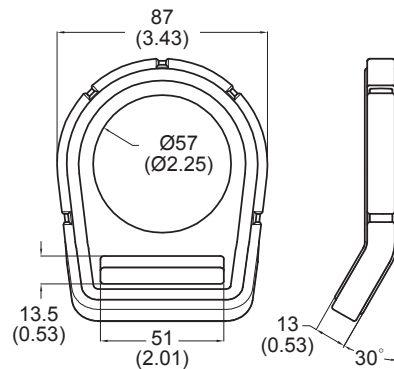


mm (inch)

**N-DE403
Dielectric D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 2.7 oz. / 77 g

Plastic Over Molded




mm (inch)

**N-DE403B
Dielectric Bent D-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 2.6 oz. / 76 g


Plastic Over Molded

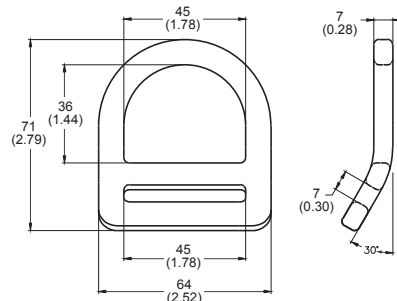

mm (inch)

**N-DE415
Dielectric D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 5.3 oz. / 152 g



mm (inch)

**N-DE415B
Dielectric Bent D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 5.2 oz. / 147 g



mm (inch)

**N-DE460
Dielectric D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 7.0 oz. / 200 g



mm (inch)

**N-DE460B
Dielectric Bent D-Ring**


Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 7.0 oz. / 200 g



mm (inch)

**N-DE007
Dielectric Quick Release Buckle**

Sheet steel, heat treated




Minimum 9kV Dielectric Resistance

Net weight : 4.5 oz. / 128 g

Patent Pending

Plastic Over Molded

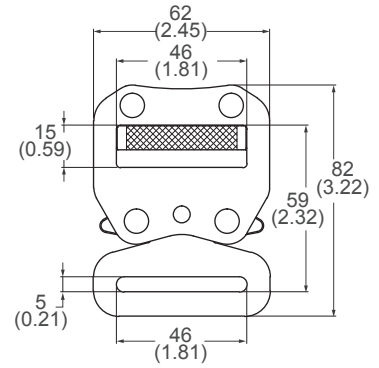

mm (inch)

**N-DE009
Dielectric Adjuster**

Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :


- ANSI Z359.12-2019
- CSA Z259.12-16

Minimum 9kV Dielectric Resistance

Net weight : 2.98 oz. / 85g

Patent Pending

Plastic Over Molded



mm (inch)

**N-DE518
Dielectric Alum D Ring**

Aluminum alloy

Min. Breaking load : 5000 lbs / 23 kN

Meets:


- ANSI Z359.12-2019
- CSA Z259.12-16

Minimum 4kV Dielectric Resistance

Net weight : 2.9 oz. / 84 g

Plastic Over Molded

New

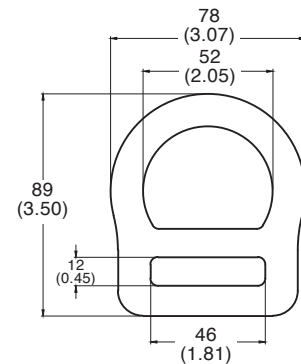

mm (inch)

**N-DE529
Dielectric Bent Alum D Ring**

Aluminum alloy

Min. Breaking load : 5000 lbs / 23 kN

Meets:


- ANSI Z359.12-2019
- CSA Z259.12-16

Minimum 4kV Dielectric Resistance

Net weight : 4.2 oz. / 120 g

Plastic Over Molded

New

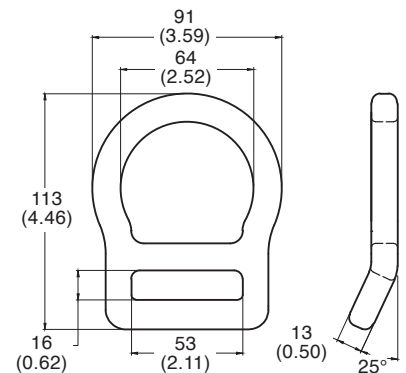


mm (inch)

**N-DE483
Dielectric O-Ring**

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 3.6 oz. / 103 g

Plastic Over Molded




mm (inch)

**N-DE005
Dielectric Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 9kV Dielectric Resistance
 Net weight : 1.6 oz. / 45 g

Plastic Over Molded

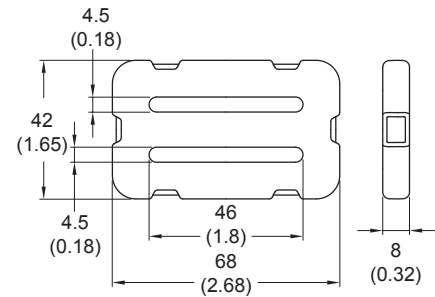


mm (inch)

**N-DE006
Dielectric Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 9kV Dielectric Resistance
 Net weight : 2.2 oz. / 61 g

Plastic Over Molded

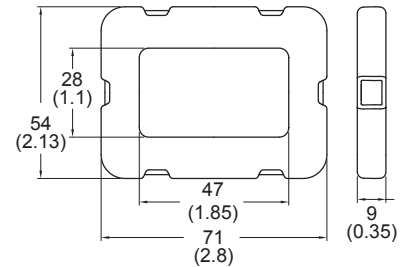


mm (inch)

**N-DE420
Dielectric Quick Buckle**

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 1.3 oz. / 36 g


Plastic Over Molded



mm (inch)

N-DE422
Dielectric Quick Buckle

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 1.1 oz. / 32 g




Plastic Over Molded

mm (inch)

N-DE448
Dielectric Quick Buckle

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 2.5 oz. / 70 g

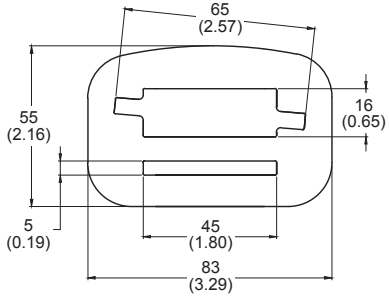


Plastic Over Molded

mm (inch)

N-DE4207
Dielectric Quick Buckle

Sheet steel, heat treated
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 1.3 oz. / 38 g




Plastic Over Molded

mm (inch)

N-DE452
Dielectric Quick Buckle

Sheet steel, heat treated
 Min. Breaking load: 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 1.3 oz. / 35.7g



Plastic Over Molded

mm (inch)


New



N-5271T
Aluminum Rebar Hook
3600 LBS gate/Transverse Load

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets:
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 22.3 oz. / 637 g

Anodized

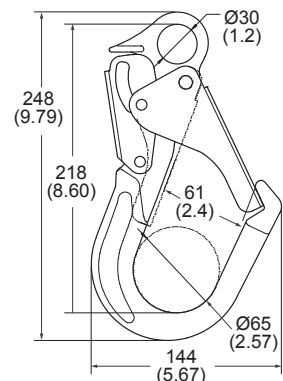


mm (inch)

N-5275T
Indicator Swivel Alum Rebar Hook
3600 LBS gate / Transverse Load

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weigh : 24.68oz. / 705 g


Anodized

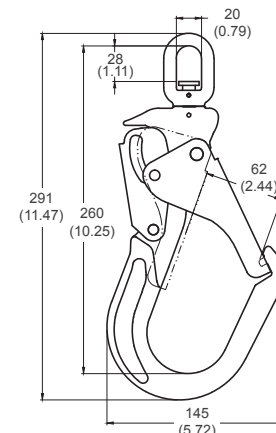

mm (inch)

N-5268
Aluminum Step Bolt Hook
3600 LBS gate strength


Specifically designed for step bolts 16 mm diameter
 Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 14.5 oz. / 414 g
 Anodized

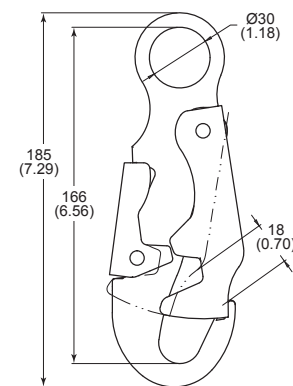

mm (inch)

N-5261
Aluminum Snap Hook
3600 LBS gate strength

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 8.7 oz. / 247 g
 Anodized




mm (inch)

N-5265
Alum Indicator Swivel Snap Hook
3600 LBS gate strength

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 10.6 oz. / 304 g

Anodized

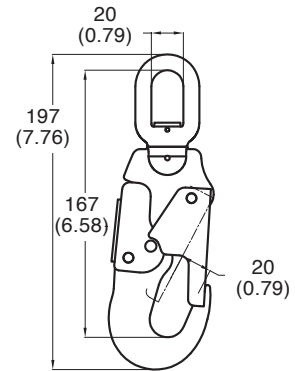


mm (inch)

N-5265 / 0
Aluminum Swivel Snap Hook
3600 LBS gate strength

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 10.5 oz. / 300 g

Anodized

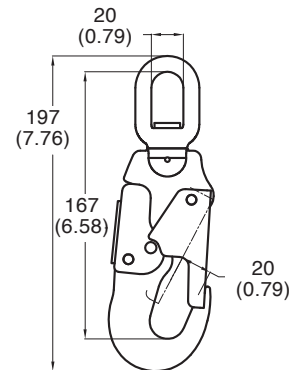


mm (inch)

N-5246
Aluminum Snap Hook

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 6.0 oz. / 169 g

Anodized




mm (inch)

N-5248
Aluminum Snap Hook

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 8.5 oz. / 244 g

Anodized



mm (inch)

Aluminum Components



N-331



SRD Attachment Bracket

Forged steel / aluminum alloy

Net weight : 5.6 oz. / 159 g

Patent Pending

Zinc Plated / Anodized

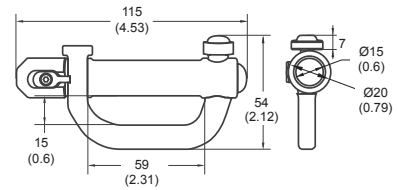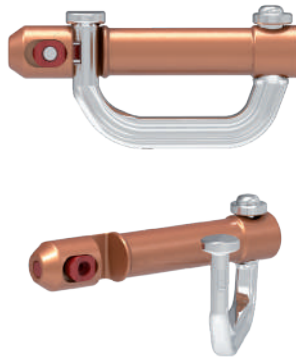

mm (inch)

N-339



SRD Attachment Bracket

Forged steel

Net weight : 6.0 oz. / 170 g

Patent Pending

Zinc Plated

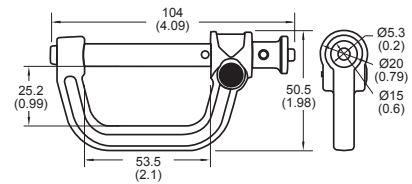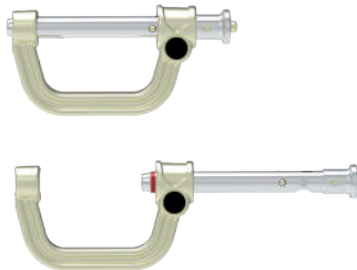

mm (inch)

N-502

Aluminum Snap Hook

Forged aluminum alloy


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 6.7 oz. / 189 g

Anodized




N-502-1
Blue



N-502-2
Green



N-502-3
Red



mm (inch)

N-504

Aluminum Snap Hook

Forged aluminum alloy


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 5.5 oz. / 158 g


Anodized



mm (inch)

**N-500
Aluminum Rebar Hook**

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 18 oz. / 520 g

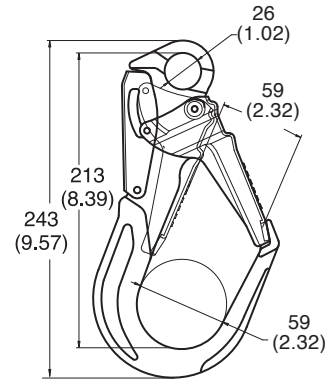


mm (inch)

Anodized

**N-501
Aluminum Rebar Hook**

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 16.2 oz. / 460 g

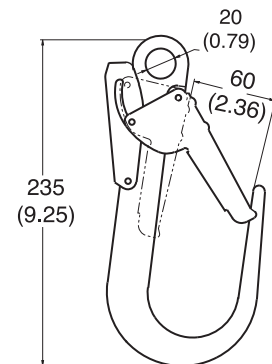


mm (inch)

Anodized

**N-50130
Aluminum Rebar Hook**

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 16.8 oz. / 480 g




mm (inch)

Anodized

**N-501110
Aluminum Huge Rebar Hook**

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 32.8 oz. / 930 g

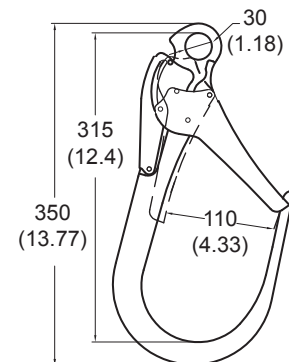

mm (inch)


Anodized

Aluminum Components



N-50110X Aluminum Huge Rebar Hook

Forged aluminum alloy
 Min. Breaking load : 4500 lbs / 20 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 32.8 oz. / 930 g

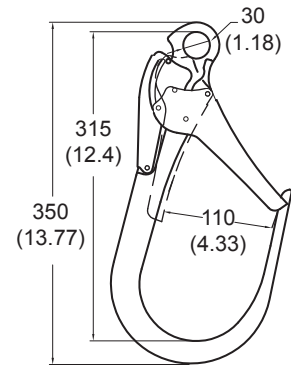


mm (inch)

Anodized

N-5015 Aluminum Indicator Swivel Rebar Hook

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 18.66 oz. / 529 g




mm (inch)

Anodized

New

N-5015 / 0 Aluminum Swivel Rebar Hook

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 18.66 oz. / 529 g




mm (inch)

Anodized

New

N-5018 Aluminum Rebar Hook

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 9.2 oz. / 260 g




mm (inch)

Anodized

New

**N-503
Aluminum Snap Hook**

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets EN 362 : 2004
 Net weight : 4.5 oz. / 130 g

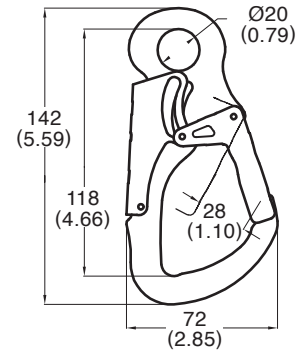


mm (inch)

Anodized

**N-5032
Aluminum Snap Hook**

Forged aluminum alloy
 Mini. Breaking load : 5000 lbs / 23 kN
 Meets EN 362 : 2004
 Net weight : 4.6 oz. / 134 g

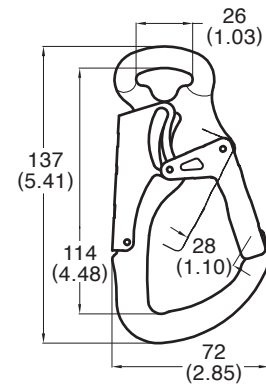


mm (inch)

Anodized

**N-5035
Aluminum Indicator Swivel
Snap Hook**

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets EN 362 : 2004
 Net weight : 6.4 oz. / 184 g

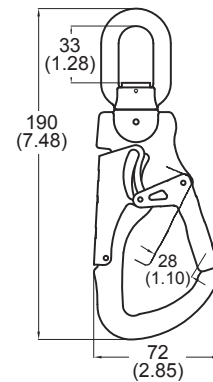


mm (inch)

Anodized

**N-5035 / 0
Aluminum Swivel Snap Hook**

Forged aluminum alloy
 Min. Breaking load : 5000 lbs / 23 kN
 Meets EN 362 : 2004
 Net weight : 6.3 oz. / 180 g

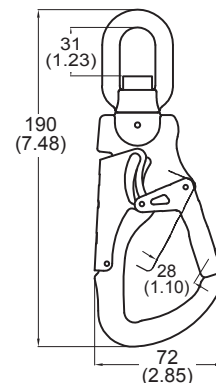


mm (inch)

Anodized

N-528 Aluminum D-Ring

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.6 oz. / 75 g


Anodized

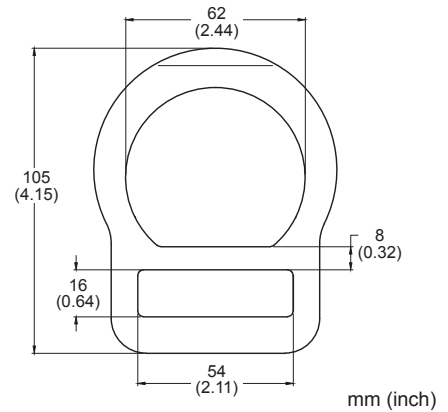

N-529 Aluminum Bent D-Ring

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.8 oz. / 78 g


Anodized

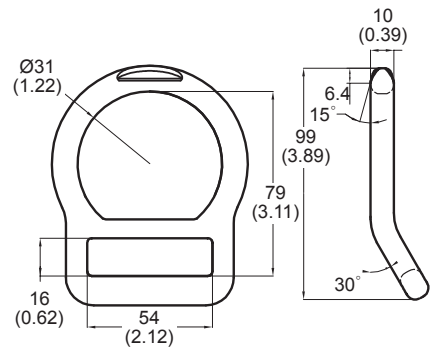

N-528A Alum D-Ring-5M Middle Bar

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.3 oz. / 94 g


Anodized

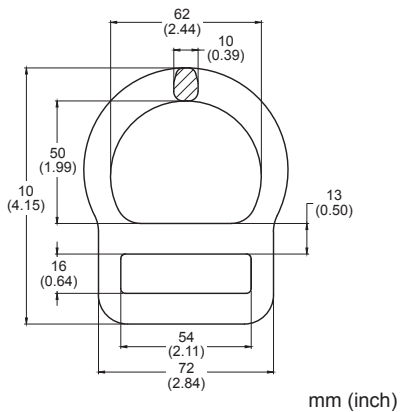

N-529A Alum Bent D-Ring-5M Middle Bar


Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.3 oz. / 94 g

Anodized

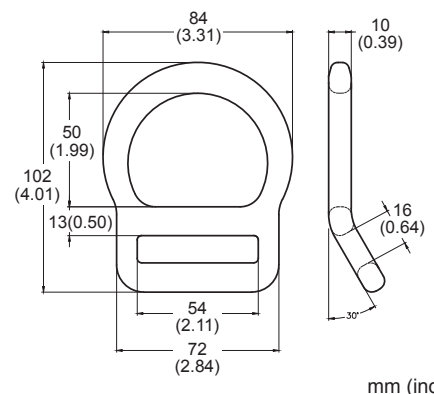

**N-518
Aluminum D-Ring**


Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 2.7 oz. / 76 g

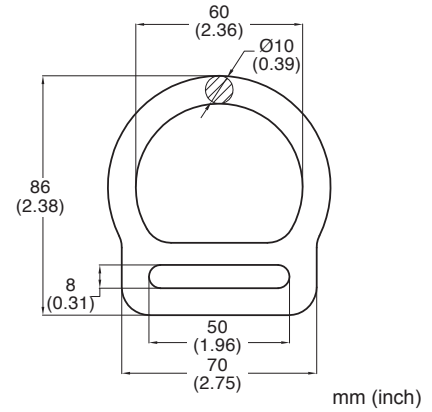

Anodized

**N-519
Aluminum Bent D-Ring**


Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 1.8 oz. / 74 g

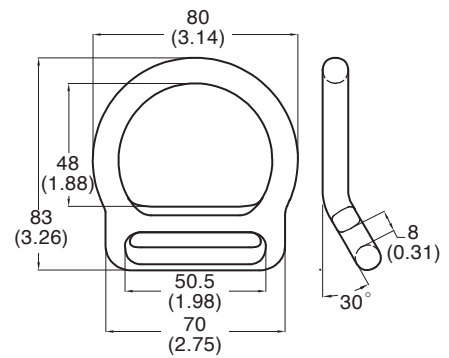

Anodized

**N-5416
Aluminum D-Ring**


Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.9 oz. / 83 g

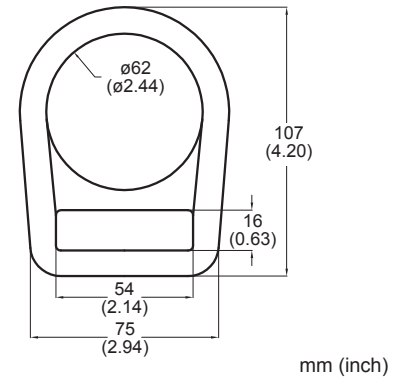

Anodized

**N-540
Aluminum D-Ring**

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.0 oz. / 114 g

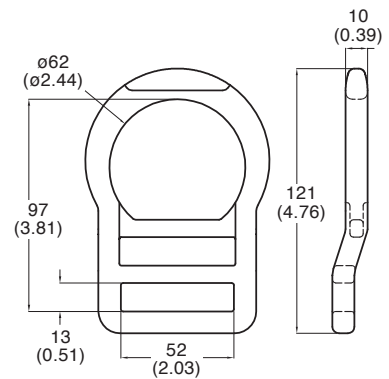


Anodized

N-5203

Aluminum D-Ring

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.2 oz. / 62 g

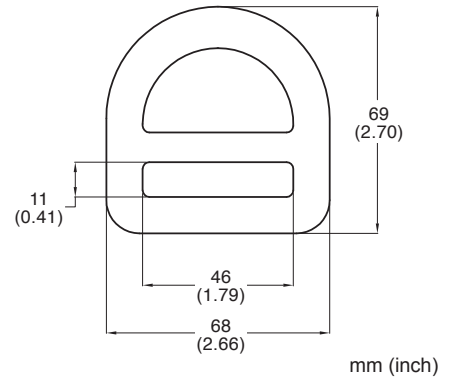


Anodized

N-5204

Aluminum Bent D-Ring

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.9 oz. / 53 g

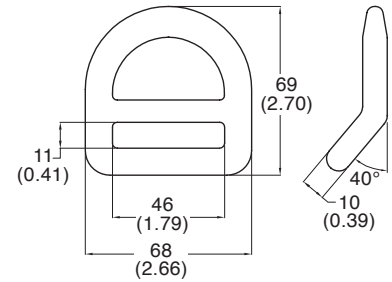


Anodized

N-507

Aluminum D-Ring

Forged aluminum alloy
 Min. Breaking load : 4000 lbs / 18 kN
 Net weight : 3.7 oz. / 106 g

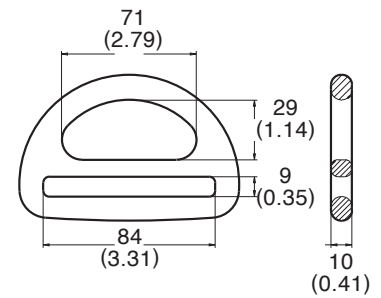


Anodized

N-512

Aluminum D-Ring


Forged aluminum alloy
 Min. Breaking load : 4000 lbs / 18 kN
 Net weight : 1.6 oz. / 44 g



Anodized

**N-5407
Aluminum D-Ring**

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.3 oz. / 65 g




Anodized

mm (inch)

**N-5407B
Aluminum Bent D-Ring**

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.2 oz. / 64 g

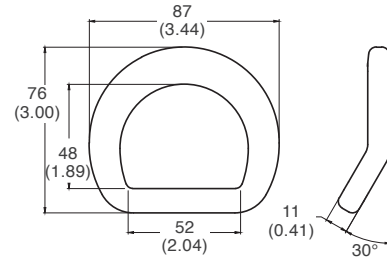


Anodized

mm (inch)

**N-5019
Aluminum Quick Buckle**

Sheet aluminum alloy
 Min. Breaking load : 2000 lbs / 9 kN
 Net weight : 0.3 oz. / 8g




Anodized

New

mm (inch)

**N-5020
Aluminum Quick Buckle**

Sheet aluminum alloy
 Min. Breaking load: 2000 lbs / 9 kN
 Net weight: 0.2 oz./ 5 g

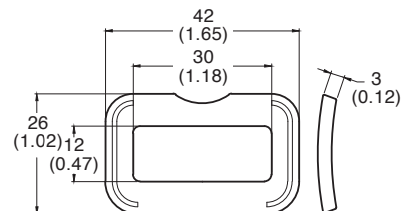

Anodized

New

mm (inch)


N-5719

Aluminum Quick Buckle

Sheet aluminum alloy

Min. Breaking load : 2000 lbs / 9 kN

Net weight : 0.2 oz. / 7 g



New

Anodized

mm (inch)


N-5721

Aluminum Quick Buckle

Sheet aluminum alloy

Min. Breaking load : 2000 lbs / 9 kN

Net weight : 0.2 oz. / 5 g



New

Anodized

mm (inch)


N-5720

Aluminum Quick Buckle

Forged aluminum alloy

Min. Breaking load : 2000 lbs / 9 kN

Net weight : 0.39 oz. / 11 g

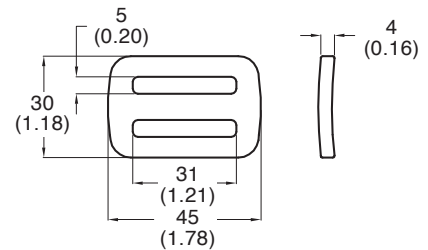

Anodized

mm (inch)


N-5722

Aluminum Quick Buckle

Forged aluminum alloy

Min. Breaking load : 2000 lbs / 9 kN

Net weight : 0.35 oz. / 10 g

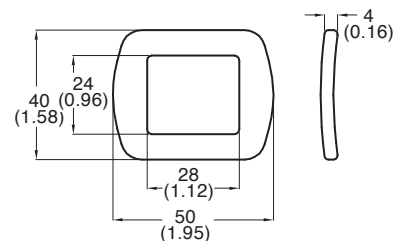


Anodized

mm (inch)

**N-5740
Aluminum Quick Buckle**

Forged aluminum alloy
 Min. Breaking load : 2000 lbs / 9 kN
 Net weight : 0.46 oz. / 13 g

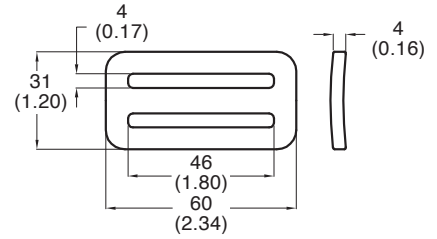


Anodized

mm (inch)

**N-5741
Aluminum Quick Buckle**

Forged aluminum alloy
 Min. Breaking load : 3400 lbs / 15 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 0.49 oz. / 14 g

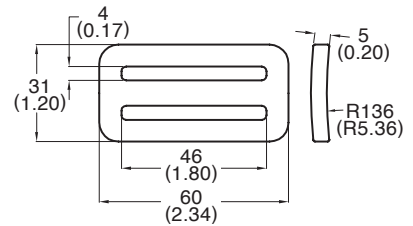


Anodized

mm (inch)

**N-5742
Aluminum Quick Buckle**

Forged aluminum alloy
 Min. Breaking load : 3400 lbs / 15 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 0.42 oz. / 12 g

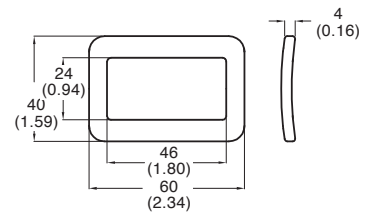


Anodized

mm (inch)

**N-5748
Aluminum Quick Buckle**

Forged aluminum alloy
 Min. Breaking load : 3400 lbs / 15 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 0.95 oz. / 27 g

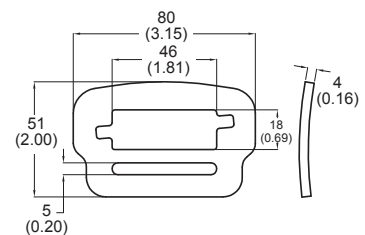

Anodized

mm (inch)


N-509

Aluminum Long Adjuster

Forged aluminum alloy

Min. Breaking load : 2200 lbs / 11 kN

Net weight : 2.0 oz. / 56 g



Anodized

mm (inch)


N-508

Aluminum Adjuster

Forged aluminum alloy

Min. Breaking load : 4500 lbs / 20 kN

Net weight : 1.3 oz. / 37 g



Anodized

mm (inch)


N-511

Aluminum Tongue Buckle with double tongue

Forged aluminum alloy


Min. Breaking load : 4000 lbs / 18 kN

Net weight : 2.0 oz. / 58 g



N-511

N-510

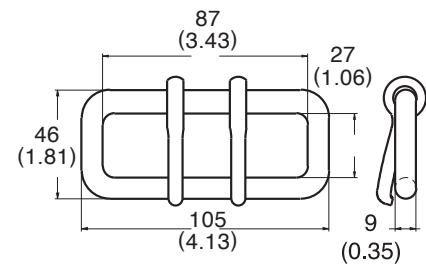

N-510

Aluminum Loop only.

without double tongue Anodized

mm (inch)

N-5439

Aluminum Tongue Buckle


Forged aluminum alloy

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.3 oz. / 67 g

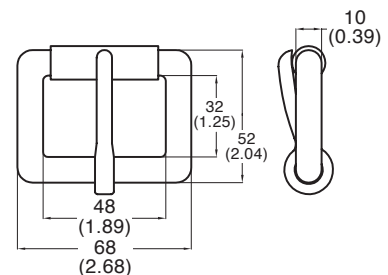


Anodized

mm (inch)

**N-5212
Aluminum Adjuster Buckle**

Forged aluminum alloy
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.7 oz. / 76 g




mm (inch)

Anodized

**N-533
Aluminum Adjuster Buckle**

Forged aluminum alloy
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.9 oz. / 54 g

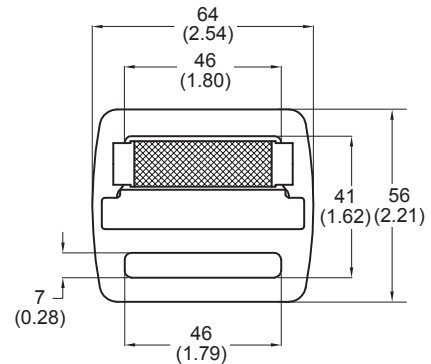


mm (inch)

Anodized

**N-51428 / N-51445 / N-51460
Aluminum O Ring**

Forged aluminum alloy
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16

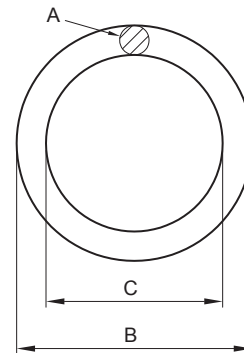

Art.No	Dimensions(mm)			Weight	
	A	B	C	(g)	(oz)
N-51428	ø12	52	28	38	1.3
N-51445	ø12	70	45	55	2.0
N-51460	ø10	80	60	50	1.8



N-51428

N-51445


N-51460

Anodized

N-5877

Extra Lock Aluminum QR Buckle

Aluminum alloy





Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 4.6 oz. / 131 g

Patent US 9521882

Anodized

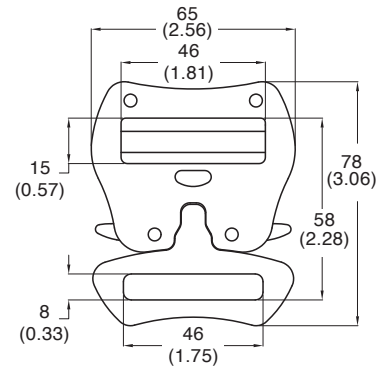

mm (inch)


N-5868

Aluminum QR Buckle

Aluminum alloy

Net weight : 1.82 oz. / 52 g

Anodized

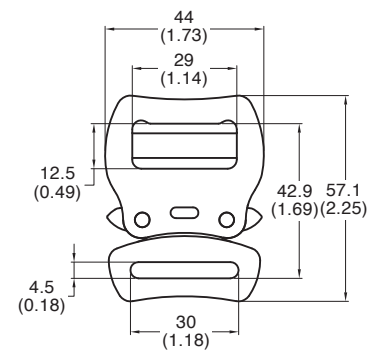

mm (inch)


N-5868T

Aluminum QR Buckle

Aluminum alloy

Net weight : 2.14 oz. / 61 g

Anodized

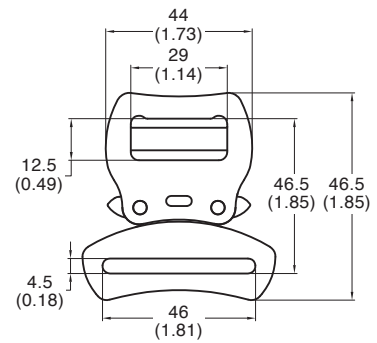

mm (inch)


N-5869T

Aluminum QR Buckle

Aluminum alloy

Net weight : 2.45 oz. / 70 g


Anodized

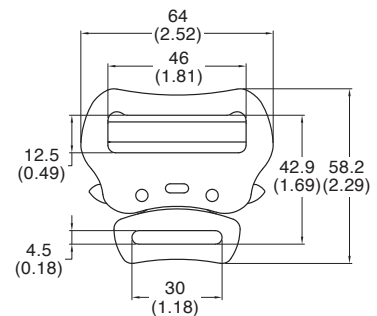


mm (inch)

**N-5869
Aluminum QR Buckle**

Aluminum alloy



Net weight : 2.8 oz. / 79g

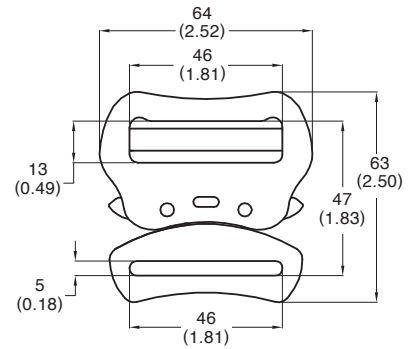


mm (inch)


Anodized

**N-5870A
Aluminum QR Buckle**

Forged aluminum alloy



Net weight : 2.7 oz. / 76 g

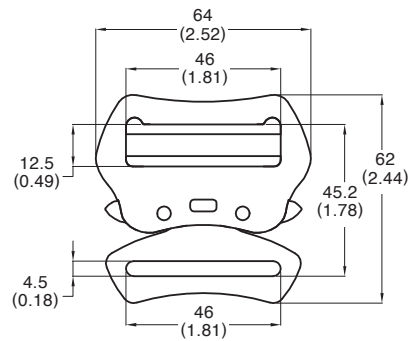


mm (inch)

Anodized

**N-5871
Aluminum QR Buckle**


Aluminum alloy



Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.2 oz. / 93 g

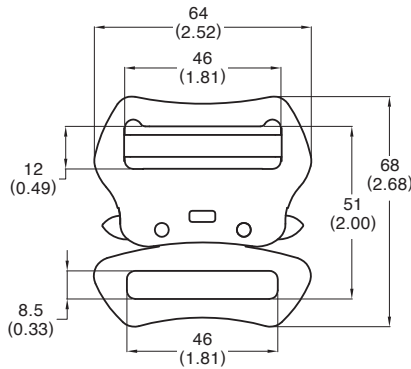


mm (inch)

Anodized

**N-479-S
QRA Buckle**

Stainless steel

Net weight : 4.4 oz. / 125 g

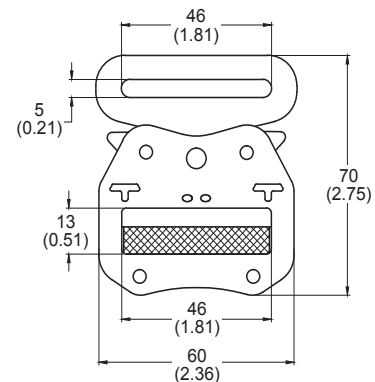

mm (inch)


Zinc Plated

Aluminum Components



N-5860 QRA Buckle

Forged aluminum alloy
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.3 oz. / 150 g

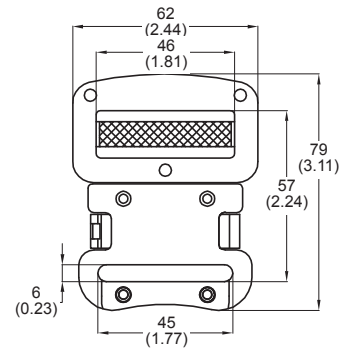


Anodized

mm (inch)

N-5861 QRA Buckle

Forged aluminum alloy
 Min. Breaking load : 3372 lbs / 15 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.9 oz. / 110 g

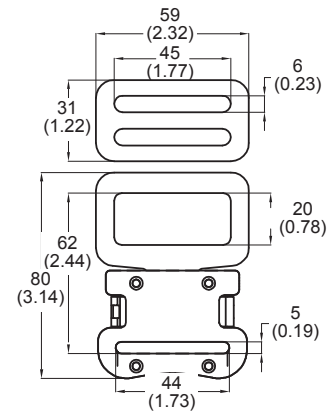


Anodized

mm (inch)

N-5862 QRA Buckle

Forged aluminum alloy
 Min. Breaking Load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.5 oz. / 100 g




Anodized

mm (inch)

N-5867 QRA Buckle

Forged aluminum alloy
 Min. Breaking load : 2000 lbs / 9 kN
 Net weight : 3.6 oz. / 103 g

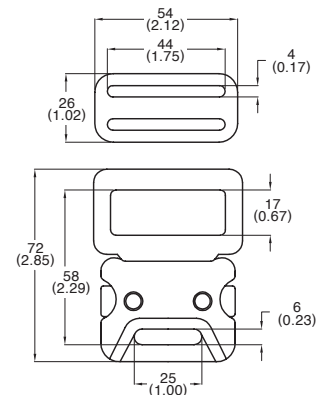


Anodized

mm (inch)

N-3591-S
Swivels - jaw to jaw

Stainless Steel, SUS 304
 Min Breaking load : 5000 lbs / 23 kN
 Net weight : 2.5 oz. / 74 g

Polished

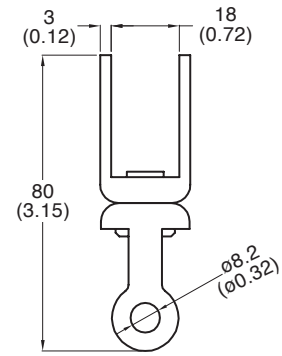


mm (inch)

N-904-S
Anchorage Connector (5 / 8")

Stainless steel
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 22.7 oz. / 645 g

Polished

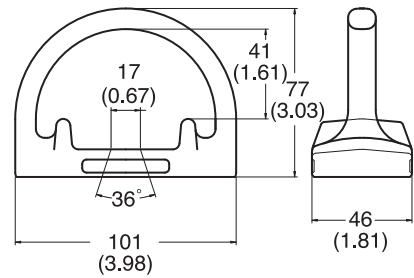


mm (inch)

N-430-S
D-Ring, with bar

Stainless steel, SUS 304
 Min. Breaking load : 3600 lbs / 16 kN
 Net weight : 3.1 oz. / 90 g


Polished

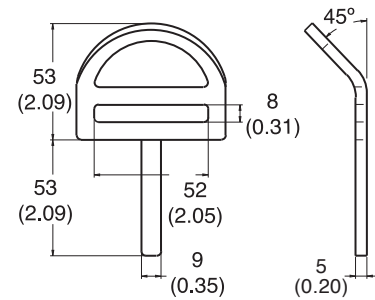

mm (inch)

**N-403-S
D-Ring**

Stainless steel, SUS 304
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 3.0 oz. / 85 g

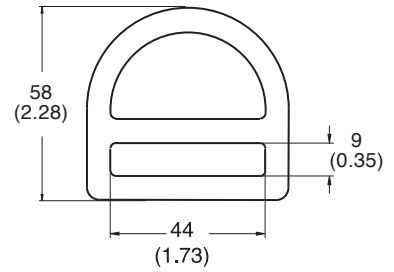


Polished

mm (inch)

**N-402-S
D-Ring**

Stainless steel, SUS 304
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 3.5 oz. / 98 g




Polished

mm (inch)

**N-432-S
D-Ring**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Net weight : 2.8 oz. / 80 g

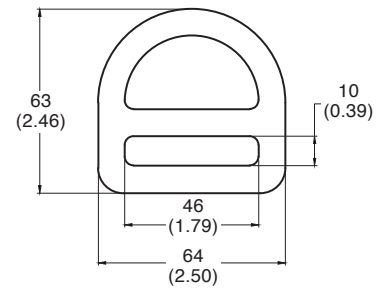


Polished

mm (inch)

**N-432A-S
D Ring**

Stainless steel, SUS 304
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 2.8 oz. / 80 g

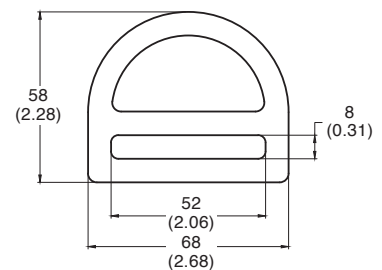


Polished

mm (inch)

New

**N-431-S
Bent D-Ring**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Net weight : 2.8 oz. / 80 g

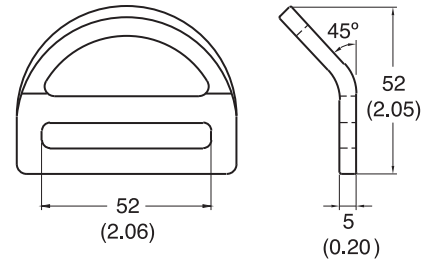


Polished

mm (inch)

**N-414-S
D-Ring**

Stainless steel, SUS 304
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.6 oz. / 159 g




Polished

mm (inch)

**N-415-S
D-Ring**

Stainless steel, SUS 304
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.9 oz. / 140 g

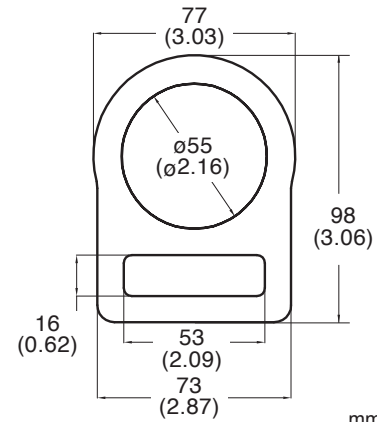


Polished

mm (inch)

**N-420-S
Quick Buckle**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.0 oz. / 28 g

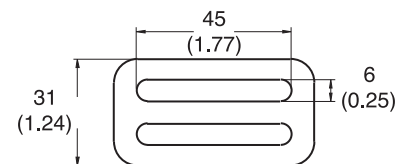


Polished

mm (inch)

**N-422-S
Quick Buckle**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.1 oz. / 31 g

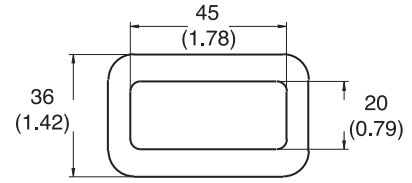


Polished

mm (inch)

**N-421-S
Quick Buckle**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 1.8 oz. / 50 g




Polished

mm (inch)

**N-423-S
Quick Buckle**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.4 oz. / 69 g

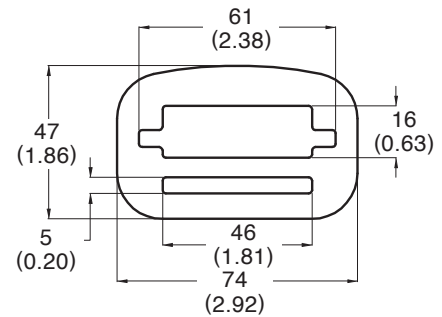


Polished

mm (inch)

**N-448-S
Carabiner**

Stainless steel, SUS 304
 Min. Breaking load : 4000 lbs / 18 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.4 oz. / 69 g

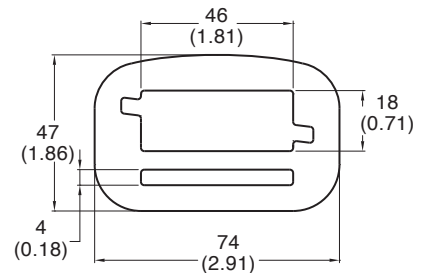


Polished

mm (inch)

New

**N-244-0-S
Carabiner**

Stainless steel, SUS 304
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 6.0 oz. / 169 g




Polished

mm (inch)

**N-252-S
Carabiner**

Stainless steel, SUS 304
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 9.0 oz. / 255 g




Polished

mm (inch)

**N-256-S
Carabiner**

Stainless steel, SUS 304
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● EN 362 : 2004
 Net weight : 8.8 oz. / 250 g




Polished

mm (inch)

**N-268G-S
Carabiner** 3600 LBS gate strength

Stainless steel, SUS 420
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets:
 ● EN Z359.12-16
 ● CSA Z259.12-16



Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Twist Locking	Triple Locking	Captive Pin	
N-268G-CP-S	✓	✓		✓	
N-268G-TRCP-S	✓		✓	✓	


Net weight : 8.9 oz. / 254 g
 Zinc Plated

mm (inch)

N-3610-S
Rope Snap Hook
3600 LBS gate strength

Forged Stainless steel, SUS 420
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 13.7 oz. / 391 g

Zinc Plated



mm (inch)


N-3615-S
Indicator Swivel Snap Hook
3600 LBS gate strength

Forged Stainless steel, SUS 420
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 18.0 oz. / 514 g

Zinc Plated



Indicator activation

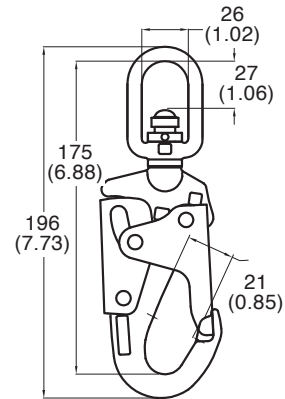


mm (inch)

N-3616-S
Swivel Snap Hook
3600 LBS gate strength

Forged stainless Steel, SUS 420
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 17.6 oz. / 504 g

Zinc plated

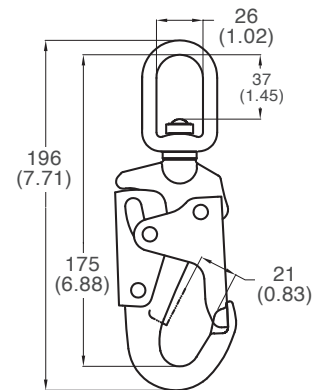

mm (inch)

YOKE



YOKE carabiners are tested by:






100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004




YOKE has expanded our carabiner offering to include Aluminum and Steel carabiners. YOKE also offers carabiners in four different versions to better meet varying workplace demands :

- Twist lock gate
- Screw lock gate
- Triple lock gate
- With or Without captive pin


YOKE Aluminum & Steel Carabiners the model with "G" are ANSI/CSA compliant for 3600 lbs gate strength.

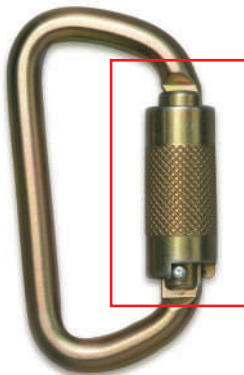

Screw Gate



Twist Locking



Triple Locking (TR)




Captive Pin (CP)

Nose Design



The "SNAG FREE" icon means that the carabiner body / gate has a smooth notch where the nose of the carabiner and gate meet. this smooth area prevents the carabiner from becoming 'snagged' on attachment points such as webbing, d-ring, etc.



100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004




N-250GK

Steel Carabiner 3600 LBS gate strength
 Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-250GK	✓		✓		
N-250GK-TR	✓			✓	
N-250GK-CP	✓		✓		✓
N-250GK-TRCP	✓			✓	✓

Zinc Plated

Net weight : 7.6 oz. / 216 g

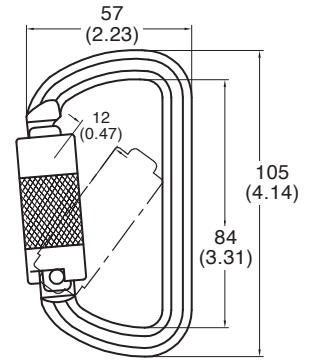

mm (inch)


N-250G

Steel Carabiner 3600 LBS gate strength
 Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-250-0		✓			
N-250			✓		
N-250G	✓		✓		
N-250G-TR	✓			✓	
N-250G-CP	✓		✓		✓
N-250G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 7.6 oz. / 215 g.

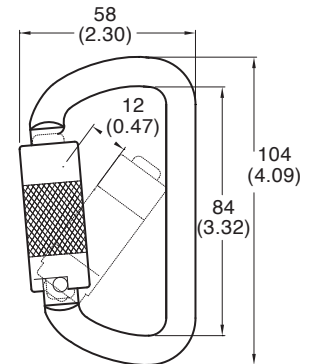

mm (inch)


N-244G

Steel Carabiner 3600 LBS gate strength
 Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-244-0		✓			
N-244			✓		
N-244G	✓		✓		
N-244G-TR	✓			✓	
N-244G-CP	✓		✓		✓
N-244G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 7.6 oz. / 215 g.

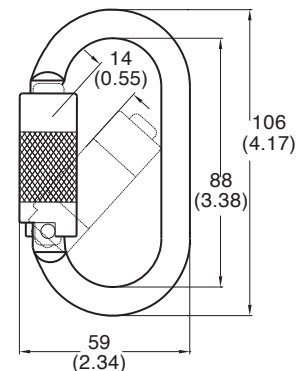

N-244-0

mm (inch)

YOKE carabiners are tested by :

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004



N-252GK


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-252GK	✓		✓		
N-252GK-TR	✓			✓	
N-252GK-CP	✓		✓		✓
N-252GK-TRCP	✓			✓	✓

Zinc Plated

Net weight : 8.8 oz. / 252 g.



mm (inch)

N-252G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-252-0		✓			
N-252			✓		
N-252G	✓		✓		
N-252G-TR	✓			✓	
N-252G-CP	✓		✓		✓
N-252G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 8.8 oz. / 250 g.



mm (inch)

N-256G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-256-0		✓			
N-256			✓		
N-256G	✓		✓		
N-256G-TR	✓			✓	
N-256G-CP	✓		✓		✓
N-256G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 9.8 oz. / 279 g.

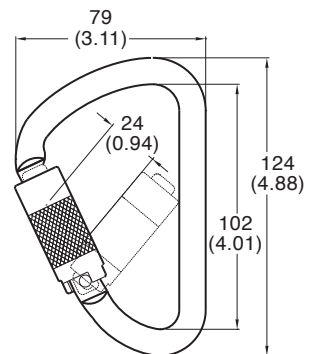

mm (inch)

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004



N-245G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-245-0		✓			
N-245			✓		
N-245G	✓		✓		
N-245G-TR	✓			✓	
N-245G-CP	✓		✓		✓
N-245G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 7.1 oz. / 200 g.



mm (inch)

N-251G



Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-251-0		✓			
N-251			✓		
N-251G	✓		✓		
N-251G-TR	✓			✓	
N-251G-CP	✓		✓		✓
N-251G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 8.0 oz. / 226 g.

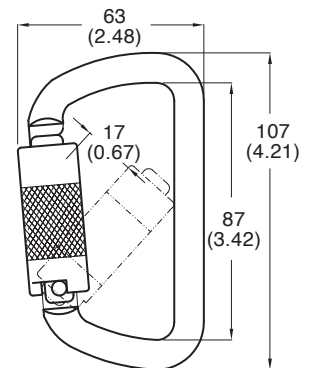

mm (inch)

N-268G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-268-0		✓			
N-268			✓		
N-268G	✓		✓		
N-268G-TR	✓			✓	
N-268G-CP	✓		✓		✓
N-268G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 9.9 oz. / 280 g.



mm (inch)

YOKE carabiners are tested by :

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004



N-267G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-267-0		✓			
N-267			✓		
N-267G	✓		✓		
N-267G-TR	✓				✓
N-267G-CP	✓		✓		✓
N-267G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 7.7 oz. / 219 g.



mm (inch)

N-246G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-246-0		✓			
N-246			✓		
N-246G	✓		✓		
N-246G-TR	✓				✓
N-246G-CP	✓		✓		✓
N-246G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 10.1 oz. / 288 g.

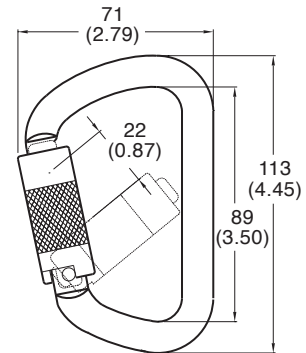

mm (inch)

N-254G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-254-0		✓			
N-254-CP			✓		✓
N-254-TRCP					✓
N-254G	✓	✓	✓		
N-254G-TR	✓				✓
N-254G-CP	✓		✓		✓
N-254G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 12.9 oz. / 369 g.



mm (inch)

N-248G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-248-0		✓			
N-248			✓		
N-248G	✓		✓		
N-248G-TR	✓			✓	
N-248G-CP	✓		✓		✓
N-248G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 10.5 oz. / 299 g.



mm (inch)

N-261G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-261-0		✓			
N-261			✓		
N-261G	✓		✓		
N-261G-TR	✓			✓	

Zinc Plated

Net weight : 10.7 oz. / 305 g.

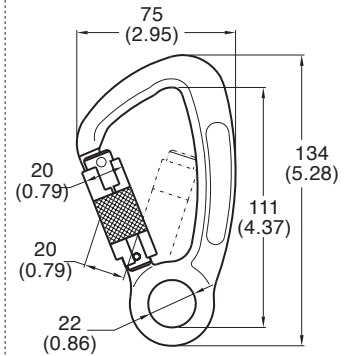

mm (inch)

N-2615G

Indicator Swivel Steel Carabiner


3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-2615-0		✓			
N-2615			✓		
N-2615G	✓		✓		
N-2615G-TR	✓			✓	

Zinc Plated

Net weight : 14.9 oz. / 423 g.

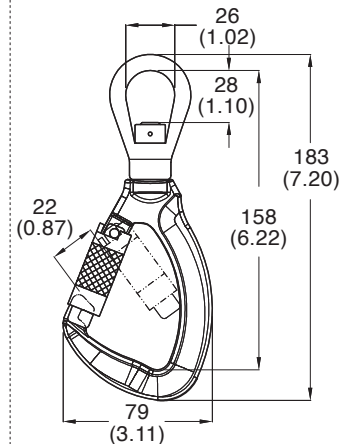

mm (inch)

YOKE carabiners are tested by :

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004




N-247G-CP

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-247-0		✓			
N-247			✓		
N-247G-CP	✓		✓		✓
N-247G-TRCP	✓			✓	✓



Zinc Plated

Net weight : 11.0 oz. / 313 g.


mm (inch)

N-258G-CP

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-258			✓		
N-258G-CP	✓		✓		✓
N-258G-TRCP	✓			✓	✓

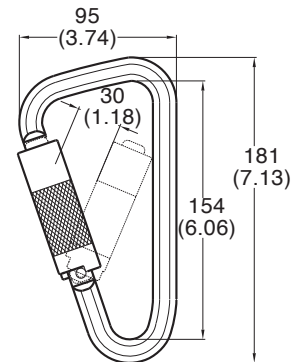

Zinc Plated

Net weight : 22.0 oz. / 625 g.


mm (inch)

N-263G-CP

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-263-0		✓			
N-263			✓		
N-263G-CP	✓		✓		✓
N-263G-TRCP	✓			✓	✓

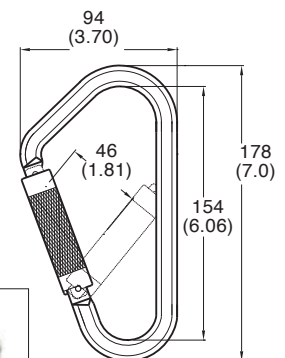

Zinc Plated

Net weight : 15.8 oz. / 447 g.

mm (inch)

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004




N-259G-CP

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-259			✓		
N-259G-CP	✓		✓		✓
N-259G-TRCP	✓			✓	✓

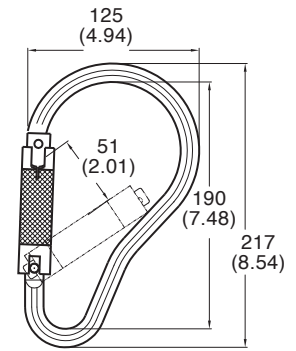

Zinc Plated

Net weight : 27.3 oz. / 774 g.


mm (inch)

N-265G-CP

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-265			✓		
N-265G-CP	✓		✓		✓
N-265G-TRCP	✓			✓	✓



Zinc Plated

Net weight : 28.8 oz. / 817 g.

mm (inch)

YOKE carabiners are tested by:

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004



Steel Carabiner

Art. NO.	N-250G	N-244G	N-245G	N-251G	N-267G	N-252G	N-246G	N-268G	N-248G
Ø mm (inch)	10 (0.39)	10 (0.39)	10 (0.39)	10 (0.39)	10 (0.39)	11 (0.43)	12 (0.47)	12 (0.47)	12 (0.47)
Breaking load minimum (kN)	40 (kN)	25 (kN)	25 (kN)	30 (kN)	30 (kN)	41 (kN)	45 (kN)	50 (kN)	50 (kN)
Gate opening mm (inch)	12 (0.47)	14 (0.55)	15 (0.59)	17 (0.67)	17 (0.67)	19 (0.75)	22 (0.87)	17 (0.67)	24 (0.94)
O.L. mm (inch)	104 (4.09)	106 (4.17)	106 (4.17)	107 (4.21)	108 (4.25)	111 (4.37)	113 (4.45)	113 (4.45)	119 (4.68)

Steel Carabiner

Art. NO.	N-247G	N-256G	N-254G	N-261G	N-263G	N-258G	N-2615G	N-259G	N265G
Ø mm (inch)	12 (0.47)	11 (0.43)	18 (0.71)	--	12 (0.47)	14 (0.55)	--	14 (0.55)	14 (0.55)
Breaking load minimum (kN)	35 (kN)	45 (kN)	50 (kN)	45 (kN)	35 (kN)	50 (kN)	35 (kN)	35 (kN)	45 (kN)
Gate opening mm (inch)	27 (1.06)	24 (0.94)	21 (0.82)	20 (0.79)	46 (1.81)	30 (1.18)	22 (0.87)	51 (2.01)	54 (2.13)
O.L. mm (inch)	123 (4.84)	124 (4.88)	134 (5.28)	134 (5.28)	178 (7.01)	181 (7.13)	183 (7.20)	217 (8.54)	221 (8.70)



YOKE Aluminum carabiners are tested by :


Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004



N-281
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-281-0	✓			
N-281		✓		
N-281-TR			✓	
N-281-CP		✓		✓
N-281-TRCP			✓	✓

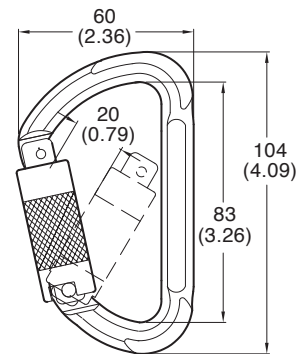


Anodized Net weight : 2.3 oz. / 66 g.

mm (inch)

N-271
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-271-0	✓			
N-271		✓		
N-271-TR			✓	
N-271-CP		✓		✓
N-271-TRCP			✓	✓



Anodized Net weight : 3.4 oz. / 96 g.


mm (inch)

**N-282
Aluminum Carabiner**

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-282-0	✓			
N-282		✓		
N-282-TR			✓	
N-282-CP		✓		✓
N-282-TRCP			✓	✓

Anodized Net weight : 3.0 oz. / 86 g.




mm (inch)

**N-283
Aluminum Carabiner**

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-283-0	✓			
N-283		✓		
N-283-TR			✓	
N-283-CP		✓		✓
N-283-TRCP			✓	✓

Anodized Net weight : 3.5 oz. / 98 g.




mm (inch)

**N-284
Aluminum Carabiner**

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-284-0	✓			
N-284		✓		
N-284-TR			✓	
N-284-CP		✓		✓
N-284-TRCP			✓	✓

Anodized Net weight : 3.5 oz. / 98 g.



mm (inch)

YOKE Aluminum carabiners are tested by :


Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004



N-274
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-274-0	✓			
N-274		✓		
N-274-TR			✓	
N-274-CP		✓		✓
N-274-TRCP			✓	✓




Anodized Net weight : 4.0 oz. / 114 g.

mm (inch)

N-272
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-272-0	✓			
N-272		✓		
N-272-TR			✓	
N-272-CP		✓		✓
N-272-TRCP			✓	✓




Anodized Net weight : 3.5 oz. / 98 g.

mm (inch)

N-276
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-276-0	✓			
N-276		✓		
N-276-TR			✓	
N-276-CP		✓		✓
N-276-TRCP			✓	✓



Anodized Net weight : 3.2 oz. / 91 g.


mm (inch)

**N-270
Aluminum Carabiner**

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-270-0	✓			
N-270		✓		
N-270-TR			✓	
N-270-CP		✓		✓
N-270-TRCP			✓	✓

Anodized Net weight : 2.8 oz. / 78 g.

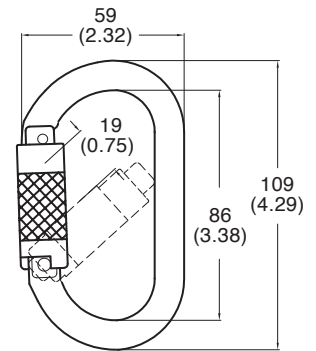


mm (inch)

**N-273
Aluminum Carabiner**

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-273-0	✓			
N-273		✓		
N-273-TR			✓	
N-273-CP		✓		✓
N-273-TRCP			✓	✓

Anodized Net weight : 3.0 oz. / 86 g.




mm (inch)

**N-275
Aluminum Carabiner**

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-275-0	✓			
N-275		✓		
N-275-TR			✓	

Anodized Net weight : 3.3 oz. / 93 g.

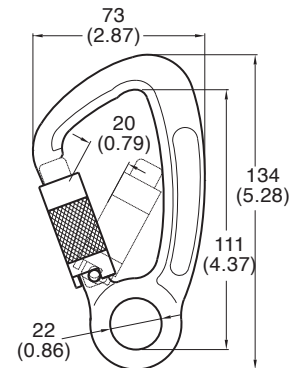

mm (inch)


YOKE Aluminum carabiners are tested by :

Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004



N-287
Aluminum Carabiner
 Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-287-0	✓			
N-287		✓		
N-287-TR			✓	
N-287-CP		✓		✓
N-287-TRCP			✓	✓

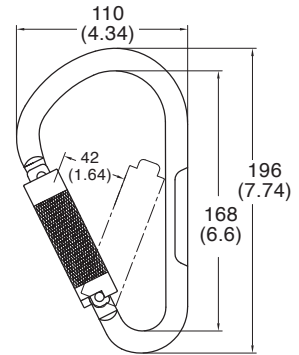


Anodized Net weight : 7.2 oz. / 205 g.

mm (inch)

N-277
Aluminum Carabiner
 Aluminum alloy, SAE 7075

Art. No.	Gate Feature		Body
	Twist Locking	Triple Locking	Captive Pin
N-277-CP	✓		✓
N-277-TRCP		✓	✓




Anodized Net weight : 13.5 oz. / 384 g.

mm (inch)

N-278
Aluminum Carabiner
 Aluminum alloy, SAE 7075

Art. No.	Gate Feature		Body
	Twist Locking	Triple Locking	Captive Pin
N-278-CP	✓		✓
N-278-TRCP		✓	✓

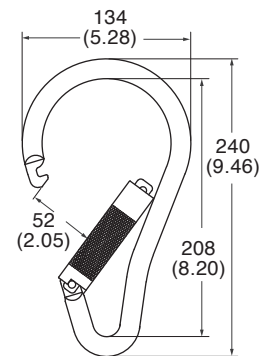

Anodized Net weight : 13.0 oz. / 368 g.


mm (inch)

N-2750
Swivel Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2750-0	✓			
N-2750		✓		
N-2750-TR			✓	

Anodized Net weight : 7.5 oz. / 214 g.

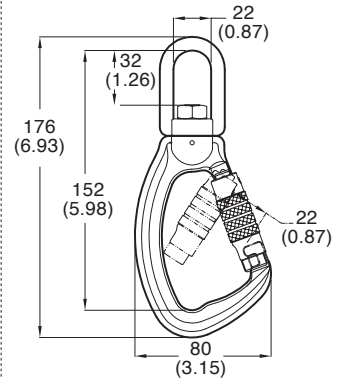


mm (inch)

N-2852
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2852-0	✓			
N-2852		✓		
N-2852-TR			✓	
N-2852-CP		✓		✓
N-2852-TRCP			✓	✓

Anodized Net weight : 3.7 oz. / 108 g.




mm (inch)

N-2854
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2854-0	✓			
N-2854		✓		
N-2854-TR			✓	
N-2854-CP		✓		✓
N-2854-TRCP			✓	✓

Anodized Net weight : 3.6 oz. / 103 g.



mm (inch)

YOKE Aluminum carabiners are tested by :


Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004



N-2855
Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2855-0	✓			
N-2855		✓		
N-2855-TR			✓	

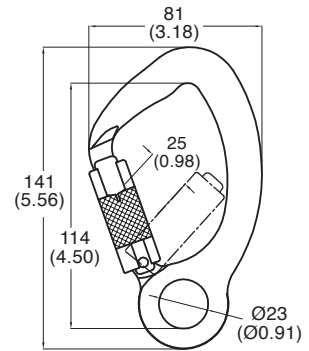


Anodized Net weight : 4.6 oz. / 132 g.

mm (inch)

N-2857
Aluminum Indicator Swivel Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2857-0	✓			
N-2857		✓		
N-2857-TR			✓	

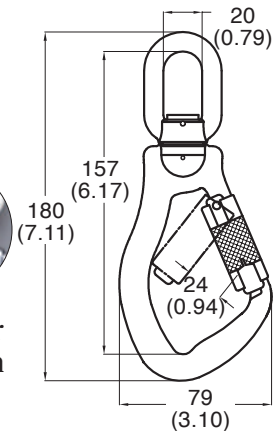


Anodized Net weight : 6.2 oz. / 177 g.

mm (inch)

N-2857 / 0
Aluminum Swivel Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2857 / 0-0	✓			
N-2857 / 0		✓		
N-2857 / 0-TR			✓	

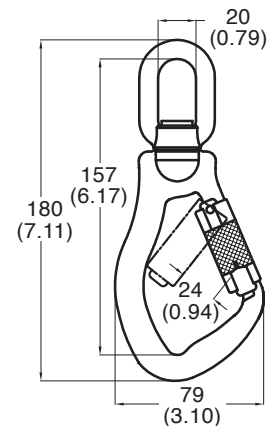


Anodized Net weight : 6.1 oz. / 172 g.

mm (inch)

N-2859
Aluminum Carabiner
 Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2859-0	✓			
N-2859		✓		
N-2859-TR			✓	
N-2859-CP		✓		✓
N-2859-TRCP			✓	✓



Anodized Net weight : 4.1 oz. / 118 g.

mm (inch)

YOKE Aluminum carabiners are tested by :

Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004



Aluminum Carabiner



Art. NO.	N-281	N-2859	N-270	N-282	N-272	N-273	N-276	N-271	N-283	N-2854
Ø mm (inch)	10 (0.39)	--	11 (0.43)	11 (0.43)	12 (0.47)	--	--	12 (0.47)	12 (0.47)	--
Breaking load minimum (kN)	23 (kN)	23 (kN)	23 (kN)	23 (kN)	23 (kN)	30 (kN)	24 (kN)	25 (kN)	23 (kN)	25 (kN)
Gate opening mm (inch)	20 (0.79)	26 (1.02)	19 (0.75)	18 (0.71)	23 (0.91)	22 (0.87)	23 (0.91)	22 (0.87)	22 (0.87)	27 (1.06)
O.L. mm (inch)	104 (4.09)	105 (4.13)	109 (4.29)	110 (4.33)	112 (4.41)	112 (4.41)	112 (4.41)	113 (4.45)	113 (4.45)	122 (4.80)

Aluminum Carabiner



Art. NO.	N-274	N-2852	N-284	N-275	N-2855	N-2750	N-2857	N-2857 / 0	N-287	N-277	N-278
Ø mm (inch)	12 (0.47)	--	11 (0.43)	--	--	--	--	--	15 (0.59)	16 (0.63)	16 (0.63)
Breaking load minimum (kN)	25 (kN)	23 (kN)	23 (kN)	28 (kN)	30 (kN)	23 (kN)	30 (kN)	30 (kN)	23 (kN)	35 (kN)	23 (kN)
Gate opening mm (inch)	23 (0.91)	25 (0.98)	25 (0.98)	20 (0.79)	25 (0.98)	22 (0.87)	24 (0.94)	24 (0.94)	42 (1.64)	52 (2.05)	52 (2.05)
O.L. mm (inch)	124 (4.88)	124 (4.88)	125 (4.92)	134 (5.28)	141 (5.55)	176 (6.93)	180 (7.09)	180 (7.09)	185 (7.74)	225 (8.85)	239 (9.41)



YOKE carabiners are tested by :

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004




N-2852G

Aluminum Carabiner 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2852G	✓	✓		
N-2852G-TR	✓		✓	
N-2852G-CP	✓	✓		✓
N-2852G-TRCP	✓		✓	✓

Anodized Net weight : 4.6 oz. / 131 g



mm (inch)


N-2853G

Aluminum Carabiner 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2853G	✓	✓		
N-2853G-TR	✓		✓	
N-2853G-CP	✓	✓		✓
N-2853G-TRCP	✓		✓	✓

Anodized Net weight : 5.3 oz. / 149.1 g



mm (inch)


N-2854G

Aluminum Carabiner 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2854G	✓	✓		
N-2854G-TR	✓		✓	
N-2854G-CP	✓	✓		✓
N-2854G-TRCP	✓		✓	✓

Anodized Net weight : 4.37 oz. / 124 g



mm (inch)

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004




N-2855G

Aluminum Carabiner 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature		
	3600Lbs Gate Strength	Twist Locking	Triple Locking
N-2855G	✓	✓	
N-2855G-TR	✓		✓



mm (inch)


Anodized Net weight : 5.3 oz. / 149.1 g

N-2857G


Aluminum Indicator Swivel Carabiner

3600 LBS gate strength Aluminum alloy, SAE 7075

Art. No.	Gate Feature		
	3600Lbs Gate Strength	Twist Locking	Triple Locking
N-2857G	✓	✓	
N-2857G-TR	✓		✓



Indicator activation

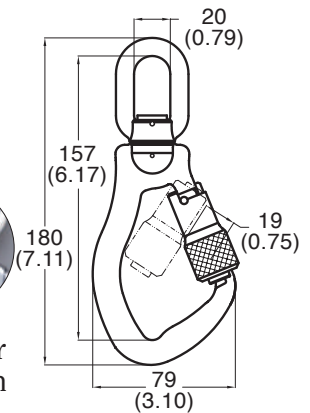

mm (inch)


Anodized Net weight : 7.2 oz. / 205 g

N-2857 / 0G

Aluminum Swivel Carabiner

3600 LBS gate strength Aluminum alloy, SAE 7075

Art. No.	Gate Feature		
	3600Lbs Gate Strength	Twist Locking	Triple Locking
N-2857 / 0G	✓	✓	
N-2857 / 0G-TR	✓		✓

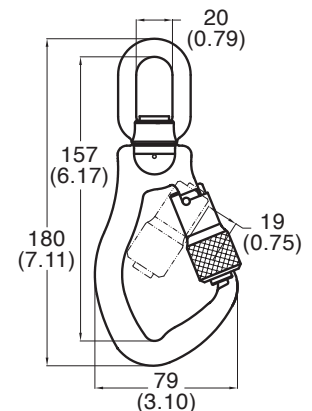

mm (inch)

Anodized Net weight : 7.0 oz. / 200 g

YOKE carabiners are tested by :

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004




N-2859G

Aluminum Carabiner 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2859G	✓	✓		
N-2859G-TR	✓		✓	
N-2859G-CP	✓	✓		✓
N-2859G-TRCP	✓		✓	✓

Anodized Net weigh : 5.0 oz. / 142 g



mm (inch)

N-2868G

Aluminum Carabiner 3600 LBS gate strength


Aluminum alloy, SAE 7075

Meets :

- CSA 259.12-11

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2868G-CP	✓	✓		✓
N-2868G-TRCP	✓		✓	✓

Anodized Net weight : 15.9 oz. / 450 g



mm (inch)

SNAG FREE Aluminum Carabiner



Art.NO.	N-2859G	N-2854G	N-2852G	N-2853G	N-2855G	N-2857G	N-2868G
Breaking load minimum(kN)	23 kN	25 kN	23 kN	40 kN	30 kN	30 kN	25 kN
Gate opening mm(inch)	21 (0.83)	24 (0.94)	20 (0.79)	22 (0.87)	22 (0.87)	19 (0.75)	51 (2.01)
O.L mm(inch)	105 (4.13)	122 (4.80)	124 (4.88)	124 (4.88)	141 (5.55)	180 (7.09)	237 (9.33)




N-610
Panic Rope Grab
(Open type)

Stainless steel
 For Rope : 16 mm (5 / 8 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 20.2 oz. / 572 g

Polished



Open for attachment

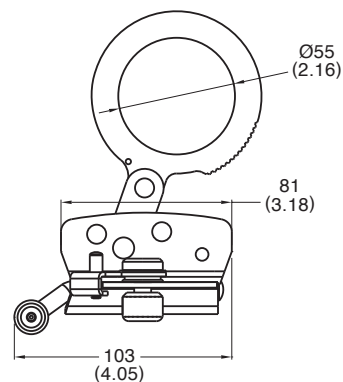

mm (inch)

N-610LY
Rope grab with integral lanyard

Stainless steel
 For Rope : 16 mm (5 / 8 ")
 Max elongation : 61 in (156 cm)
 Max arresting force : 1300 lbs (6 kN)
 Max freefall : 3.28 ft (1 m)
 Worker mass range : 100-350 lbs (45-160 kgs)
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● CSA Z259.2.5-17
 ● ANSI Z359.15-14
 Net weight : 42.28 oz. / 1208g

Polished




mm (inch)


N-630
Panic Rope Grab
(Open type)

Steel
 For Rope : 16 mm (5 / 8 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weigh : 20.2 oz. / 572 g

Zinc Plated

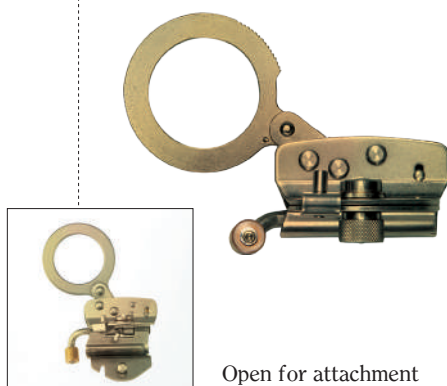

Open for attachment

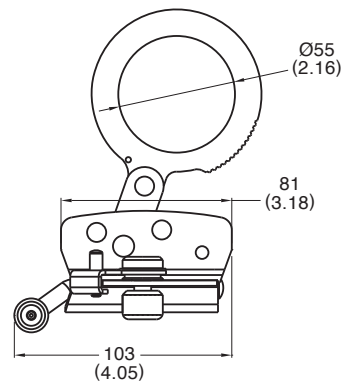

mm (inch)

N-630LY
Rope grab with integral lanyard

Steel
 For Rope : 16 mm (5 / 8 ")
 Max elongation : 61 in (156 cm)
 Max arresting force : 1300 lbs (6 kN)
 Max freefall : 3.28 ft (1 m)
 Worker mass range : 100-350 lbs (45-160 kgs)
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● CSA Z259.2.5-17
 ● ANSI Z359.15-14
 Net weight : 42.67 oz. / 1208 g

Zinc Plated



mm (inch)


**N-616
Panic Rope Grab
(Open type)**

Stainless steel
 For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 20.2 oz. / 572 g

Polished



Open for attachment

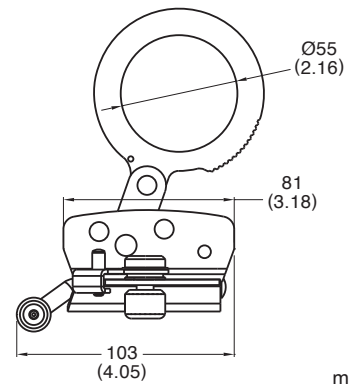


mm (inch)


**N-636
Panic Rope Grab
(Open type)**

Steel
 For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 20.8 oz. / 589 g

Zinc Plated



Open for attachment

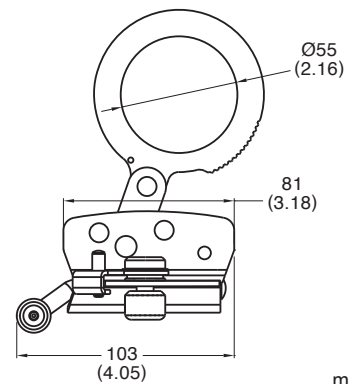

mm (inch)


**N-617
Rope Grab
(Open type)**

Stainless steel
 For Rope : 14 - 16 mm (9 / 16 " - 5 / 8 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 15.1 oz. / 428 g

Polished



Open for attachment




mm (inch)


**N-637
Rope Grab
(Open type)**

Steel
 For Rope : 14 - 16 mm (9 / 16 " - 5 / 8 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 15.1 oz. / 428 g

Zinc Plated



Open for attachment




mm (inch)


N-618
Rope Grab
(Open type)

Stainless steel
 For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 20.3 oz. / 580 g

Polished

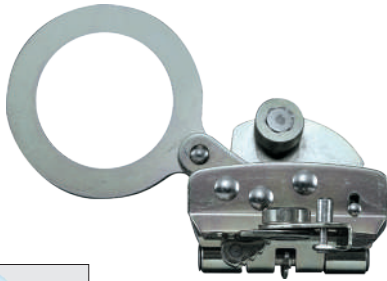

Open for attachment





mm (inch)


N-638
Rope Grab
(Open type)

Steel
 For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 20.5 oz. / 586 g

Zinc Plated

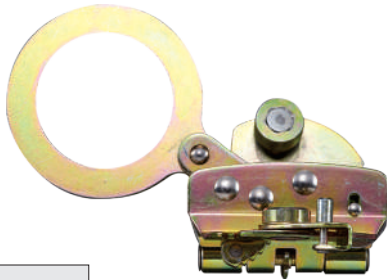

Open for attachment




mm (inch)


N-619T
Rope Grab With Parking Feature
(Open type)

Stainless Steel
 For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 17.5 oz. / 499 g

Polished



Open for attachment




mm (inch)


N-619
Rope Grab
(Open type)

Stainless Steel
 For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 14.9 oz. / 428 g

Polished



Open for attachment




mm (inch)


**N-639
Rope Grab
(Open type)**

Steel
 For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 15.1 oz. / 428 g

Zinc Plated



Open for attachment



mm (inch)


**N-606AP
Panic Rope Grab-Positioning**

Stainless steel
 For Rope : 16 mm (5/8")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets:
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 25.9 oz. / 733 g

Polished



Open for attachment




mm (inch)

**N-602-12
Rope Grab with Eye**

Steel
 For Rope : 12 mm (1 / 2 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 358
 Net weight : 14.4 oz. / 441 g

Zinc Plated

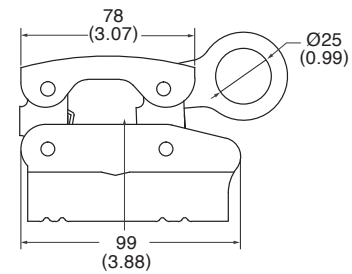


mm (inch)

**N-602
Rope Grab with Eye**

Steel
 For Rope : 16 mm (5 / 8 ")
 Min. Breaking load : 3600 lbs / 16 kN
 Meets :
 ● ANSI Z359.1
 ● EN 353-2
 Net weight : 16.2 oz. / 458 g


Zinc Plated

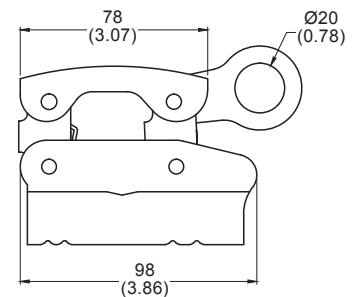

mm (inch)

**N-668
Rope Grab**

Aluminum alloy
Rope size : 11-13 mm
Net weight : 5.6 oz. / 159g

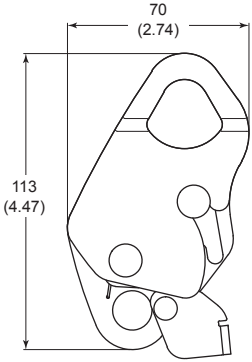


mm (inch)

Anodized

**N-620/N-622
Cable Grab With Eye**

Stainless steel
Min. Breaking load : 3600 lbs / 16 kN
Meets :
● EN 353-2

Art No.	Wire Rope	Net Weight
N-620	8mm(5/16")	16.4 oz./465g
N-622	10mm(3/8")	16.9oz./478g

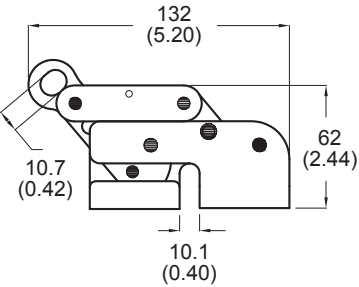


mm (inch)

Polished


**N-621/N-623
Cable Grab With Eye**

Stainless steel
Min. Breaking load : 3600 lbs / 16 kN
Meets :
● ANSI Z359.1
● EN 353-2

Art No.	Wire Rope	Net Weight
N-621	8mm(5/16")	16.8 oz./477g
N-623	10mm(3/8")	17.3oz./490g



Anti-upside down

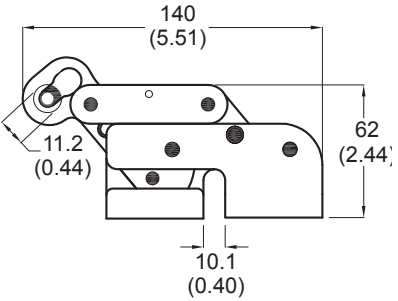


mm (inch)

Polished

**N-604
Rope Grab with Hook**

Steel
For Rope : 16 mm (5 / 8 ")
Min. Breaking load : 3600 lbs / 16 kN
Meets :
● ANSI Z359.1
● EN 353-2
Net weight : 19.3 oz. / 547 g

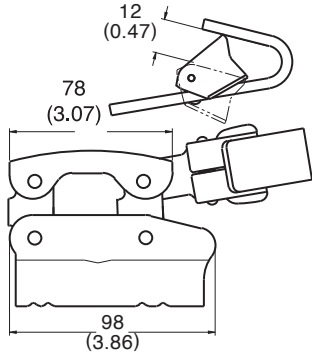


mm (inch)

Zinc Plated

**N-650
Rope Grab With Fixed Cam**

Aluminum alloy
Rope size : Ø 9 mm — Ø 13 mm
Net weight : 5.8 oz. / 166 g




Anodized

mm (inch)

**N-650B
Rope Grab With Removable Cam**

Aluminum alloy
Rope size : Ø 9 mm — Ø 13 mm
Net weight : 6.2 oz. / 177 g




Anodized

mm (inch)

**N-651
Rope Adjustor Grab With
Fixed Cam**

Aluminum alloy
Rope size : Ø 9 mm — Ø 13 mm
Net weight : 6.1 oz. / 173 g
Not for fall arrest




Anodized

mm (inch)

**N-651B
Rope Adjustor Grab With
Removable Cam**

Aluminum alloy
Rope size : Ø 9 mm — Ø 13 mm
Net weight : 6.4 oz. / 182 g
Not for fall arrest




Anodized

mm (inch)

N-670
Positioning Grab

Stainless steel / Aluminum alloy
Rope size : Ø 14 mm — Ø 16 mm
Net weight : 8.3 oz. / 238 g

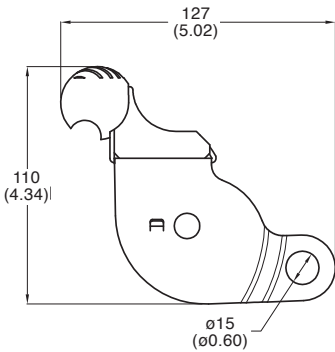


mm (inch)

Polished

N-660
Rope Grab

Aluminum alloy
Rope size : Ø 12 mm
Net weight : 7.4 oz. / 210 g

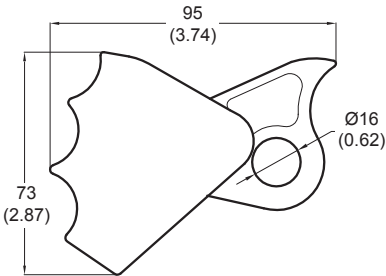



mm (inch)

N-660-16
Rope size : Ø 16 mm

Anodized

N-608
Rope Tensioner

Steel, heat treated
Rope Size : 16 mm (5 / 8 ")
Net weight : 58.6 oz. / 1.66 kg

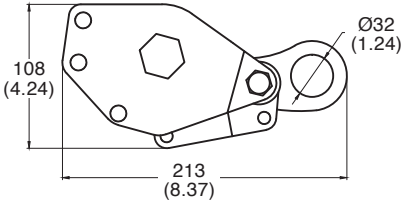

mm (inch)

Zinc Plated

New




N-351

**Swivels - Eye to Eye
(non-indicator)**

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 6.2 oz. / 176 g



N-3035M

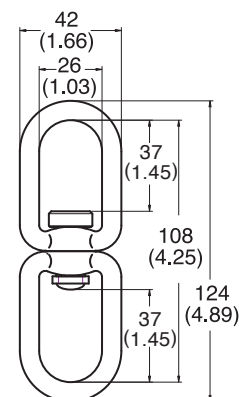


mm (inch)

N-352

**Swivels - Jaw to Jaw
(non-indicator)**

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 6.3 oz. / 180 g




mm (inch)

N-353

**Swivels - Jaw to Eye
(non-indicator)**

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 6.2 oz. / 175 g

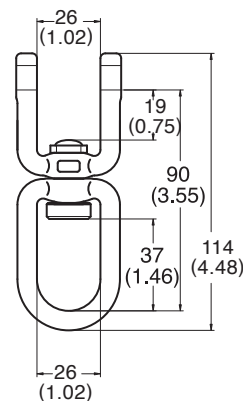


mm (inch)

N-354

**Swivels - Eye to Eye
(non-indicator)**

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 7.1 oz. / 200 g

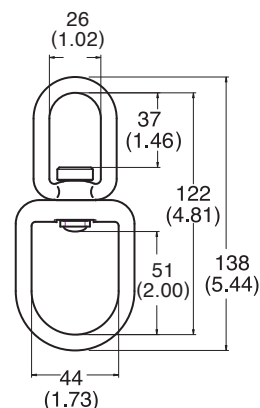


mm (inch)

Zinc Plated


N-355
Indicator Swivels - Eye to Eye

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 7.4 oz. / 211 g

Zinc Plated



Indicator activation

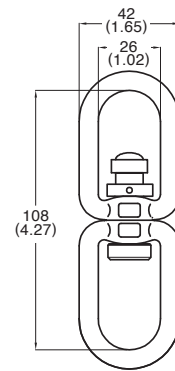

mm (inch)


N-356
Indicator Swivels - Jaw to Jaw

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 6.7 oz. / 190 g

Zinc Plated



Indicator activation



mm (inch)


N-357
Indicator Swivels - Jaw to Eye

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 6.5 oz. / 185 g

Zinc Plated



Indicator activation

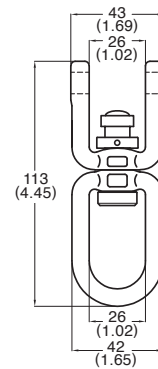

mm (inch)


N-358
Indicator Swivels - Eye to Eye

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 7.4 oz. / 210 g

Zinc Plated




Indicator activation

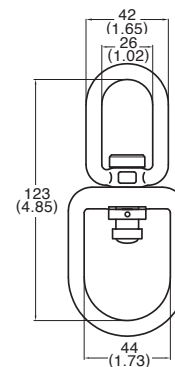

mm (inch)

N-903
Anchorage Connector (1 / 2")

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 for 1 / 2 : (M13) bolt.
 Net weight : 21.2 oz. / 600 g

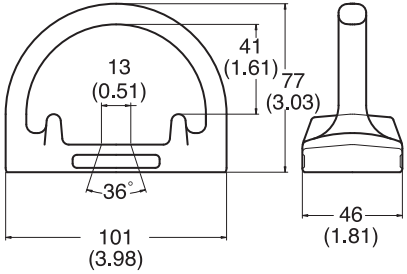


mm (inch)

Zinc Plated

"Warning: Bolts for anchorage connector installation to be minimum grade 8 quality with lock washer."

N-904
Anchorage Connector (5 / 8")

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 for 5 / 8 : (M16) bolt.
 Net weight : 21.3 oz. / 582 g

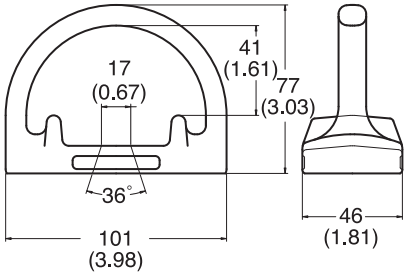


mm (inch)

Zinc Plated

"Warning: Bolts for anchorage connector installation to be minimum grade 8 quality with lock washer."

N-905
Anchorage Connector (3 / 4")

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 for 3 / 4 : (M19) bolt.
 Net weight : 19.6 oz. / 563 g

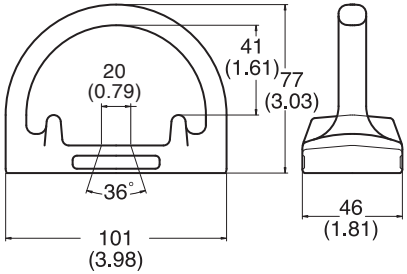


mm (inch)

Zinc Plated

"Warning: Bolts for anchorage connector installation to be minimum grade 8 quality with lock washer."

N-907
Anchorage Connector

Completed with grade 8 nut & lock washer
 Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Net weight : 21.3 oz. / 604 g

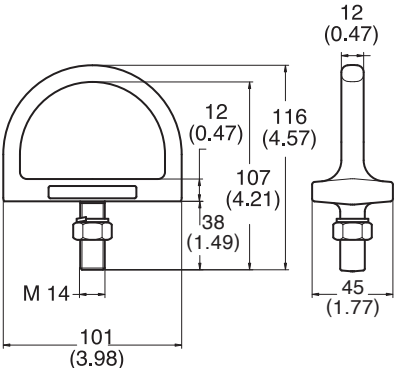


mm (inch)

Zinc Plated

**N-481
N-481R
Roof Anchor-reusable**

Net weight : 39.1 oz. / 1108 g

Art. No.	Color
N-481	Zinc plated
N-481R	Red Powder Coated




mm (inch)

**N-485
Swivel Roof Anchor Bracket**

Net weight : 39.2 oz. / 1120 g

Patent Pending

Zinc Plated

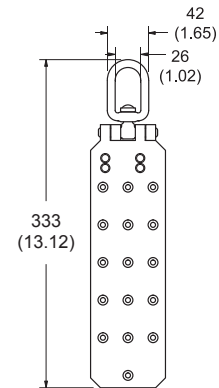


mm (inch)

**N-5072R
Roof Anchor Bracket**

Net weight : 39.5 oz. / 1120 g

Red Powder Coated




mm (inch)

**N-5072F
Roof Anchor Bracket**

Net weight : 39.5 oz. / 1120 g

Zinc Plated

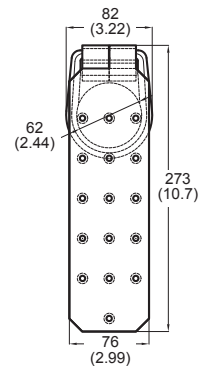


For Flat Surface

mm (inch)

**N-480
Roof Anchor-disposable**


Net weight : 12.6 oz. / 357 g

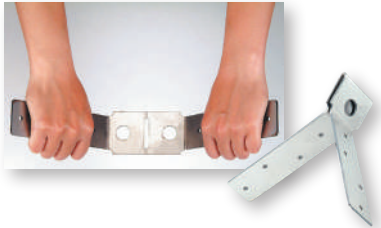

Zinc Plated

**N-4805
Roof Anchor**

Net weight : 12.5 oz. / 335 g





Zinc Plated

For Flat Surface

**N-350 / N-3501 / N-3502
Anchorage Connector**

Stainless steel, SUS 304
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 12.9 oz. / 366 g





mm (inch)

Polished

**N-459
Steel Plate**

Net weight : 9.5 oz. / 271 g

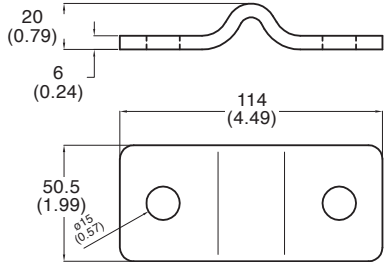


mm (inch)

Zinc Plated

N-5372
Rescue Hauler Pulley-2 way
Auto Locking

Stamping aluminum alloy
 Rope size : 11 mm
 Working load limit : 250 kg
 Net weight : 55.6 oz. / 1588 g

Anodized

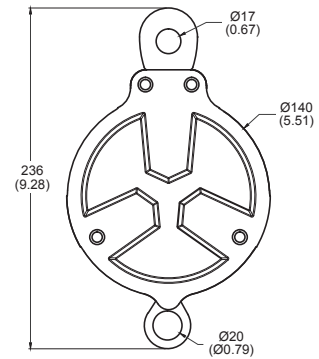


mm (inch)

N-5331
Big Mobile Double Pulley

Stamping aluminum alloy
 Rope size : Maximum to 13 mm
 Min. Breaking load : 50 kN
 Net weight : 18.9 oz. / 539g

Anodized

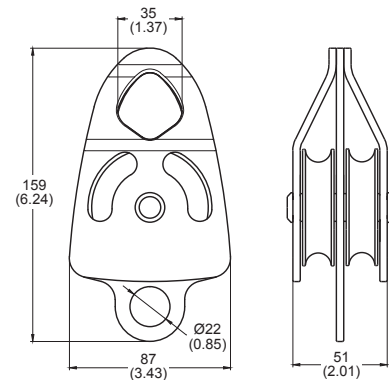


mm (inch)

N-5331B
Big Mobile Double Pulley

With Ball Bearing
 With Stainless Sheave
 Stamping aluminum alloy
 Rope size : Maximum to 13 mm
 Min. Breaking load : 50 kN
 Net weight : 29.4 oz. / 834 g

Anodized


New

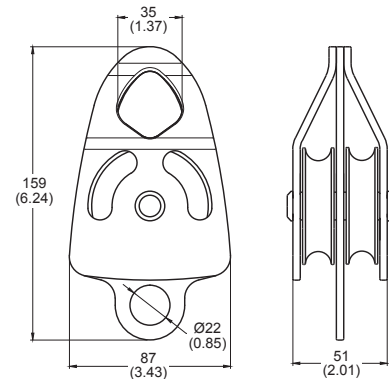

mm (inch)

**N-6901
Cable Glider**

Stainless Steel
Net weight : 8.5 oz. / 241 g

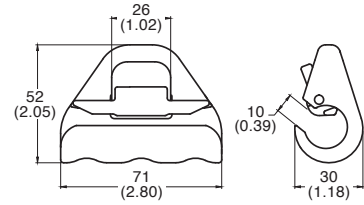


New

Polished

mm (inch)

**N-908
Roof Ring Anchor**

Steel, heat treated
Net weight : 34.71 oz. / 984 g

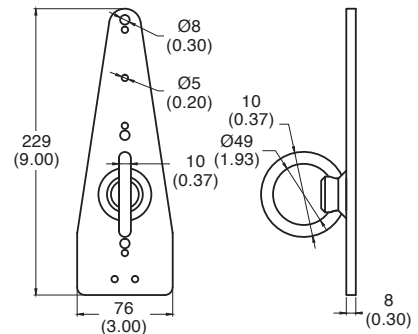



New

Zinc Plated

mm (inch)

**N-5340
Tyrolean Pulleys**

Stamping aluminum alloy
Rope size : Maximum to 13 mm
Min. Breaking load : 24 kN
Net weight : 8.6 oz. / 245 g





Anodized

mm (inch)

**N-5340B
Tyrolean Pulleys**

With Ball Bearing
With Stainless Sheave
Stamping aluminum alloy
Rope size : Maximum to 13 mm
Min. Breaking load : 24 kN
Net weight : 12.63 oz. / 358 g




New

Anodized

mm (inch)

**N-5320
Fixed Pulley**

Stamping aluminum alloy
 Rope size : Maximum to 12 mm
 Min. breaking load : 20 kN
 Net weight : 3.1 oz. / 88 g




Anodized

mm (inch)

**N-5322
Mobile Pulley**

Stamping aluminum alloy
 Rope size : Maximum to 12 mm
 Min. breaking load : 20 kN
 Net weight : 4.1 oz. / 117 g




Anodized

mm (inch)

**N-5330
Mobile Pulley**

Stamping aluminum alloy
 Rope size : Maximum to 16 mm
 Min. breaking load : 30 kN
 Net weight : 9.6 oz. / 272 g




Anodized

mm (inch)

**N-5332
Mobile Double Pulley**

Stamping aluminum alloy
 Rope size : Maximum to 16 mm
 Min. breaking load : 30 kN
 Net weight : 16.8 oz. / 476 g




Anodized

mm (inch)

N-5300
Handled Ascender - Right Hand

Stamping aluminum alloy
Rope size : 9 mm to 12mm
● Meets : EN 567
Net weight : 6.9 oz. / 196 g

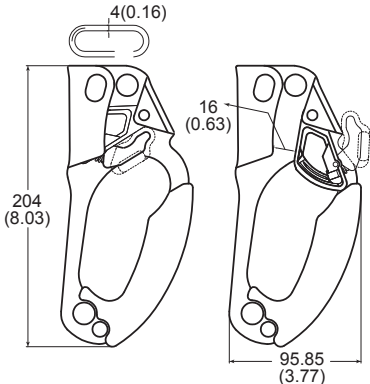


mm (inch)

Anodized

N-5302
Handled Ascender - Left Hand

Stamping aluminum alloy
Rope size : 9 mm to 12mm
● Meets : EN 567
Net weight : 6.9 oz. / 196 g

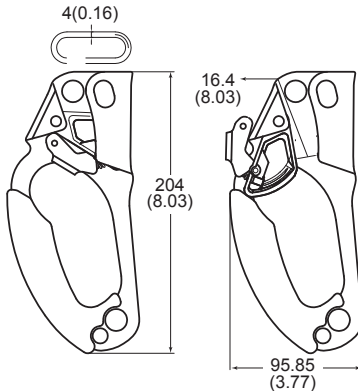


mm (inch)

Anodized

N-5306
Chest Ascender

Stamping aluminum alloy
Rope size : 9 mm to 12mm
● Meets : EN 567
Net weight : 5.8 oz. / 165 g

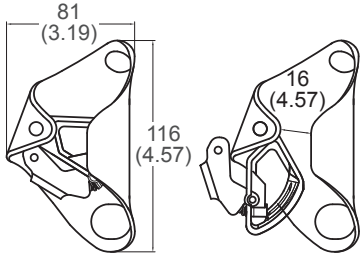

mm (inch)


Anodized

N-5350
Swivel

Forged aluminum alloy
Min. breaking load : 6000 lbs / 30 kN
Net weight : 5.6 oz. / 158 g



N-5350B

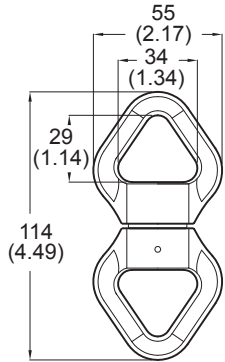

mm (inch)


N-5350B
Swivel With Ball Bearing

Forged aluminum alloy
Min. Breaking load : 6000 lbs / 30kN
Net weight : 5.7 oz. / 163 g

Anodized

**N-5310
Belay Tube**

Forged aluminum alloy
Rope size : 8 mm to 11 mm
Net weight : 2.0 oz. / 58 g

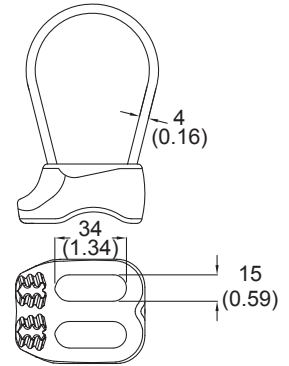


Anodized

mm (inch)

**N-5312
Belay Tube**

Forged aluminum alloy
Rope size : 8 mm to 11 mm
Net weight : 1.9 oz. / 53 g

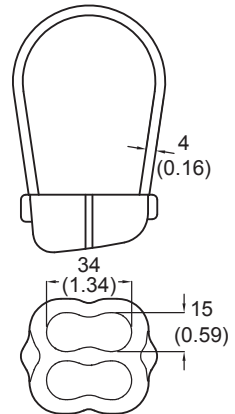


Anodized

mm (inch)

**N-2301-CP
Aluminum Carabiner**

Aluminum alloy
Min. Breaking load : 1800lbs / 8kN
Net weight : 1.02 oz. / 24 g




Anodized

mm (inch)

**N-220
Forged Accessory Hook**

Aluminum alloy
Min. breaking load : 5kN
Net weight : 0.7 oz. / 20 g




Anodized

mm (inch)

**N-5380
Rigging Plate**

Forged aluminum alloy
Min. breaking load : 35 kN
Net weight : 2.3 oz. / 65 g

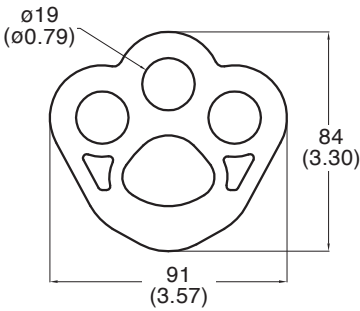


Anodized

mm (inch)

**N-5381
Rigging Plate**

Forged aluminum alloy
Min. breaking load : 35 kN
Net weight : 7.7 oz. / 220 g

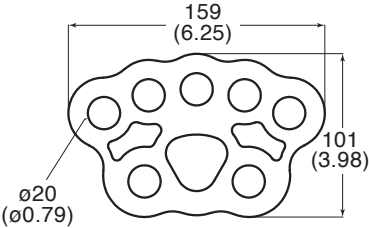


Anodized

mm (inch)

**N-5382
Rigging Plate**

Forged aluminum alloy
Min. breaking load : 45 kN
Net weight : 16.1 oz. / 460 g

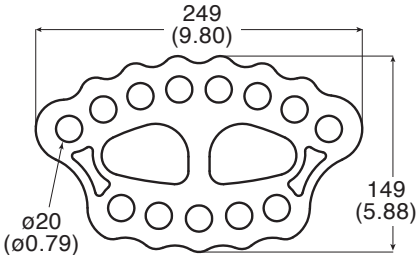


Anodized

mm (inch)

**N-505
Figure 8 Descender**

Forged aluminum alloy
 For Rope : 3 / 8 " - 5 / 8 " (9 - 16 mm)
 Min. Breaking load : 7500 lbs / 35 kN
 Net weight : 4.1 oz. / 116 g

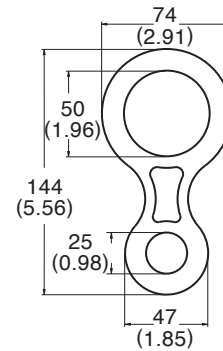


Anodized

mm (inch)

**N-5052
Figure 8 Descender**

Forged aluminum alloy
 For Rope : 3 / 8 " - 5 / 8 " (9 - 16 mm)
 Min. Breaking load : 5500 lbs / 25 kN
 Net weight : 3.5 oz. / 100 g




Anodized

mm (inch)

**N-506
Big Figure 8 Descender**

Forged aluminum alloy
 For Rope : 3 / 8 " - 5 / 8 " (9 - 16 mm)
 Min. breaking load : 9000 lbs / 40 kN
 Net weight : 9.5 oz. / 270 g

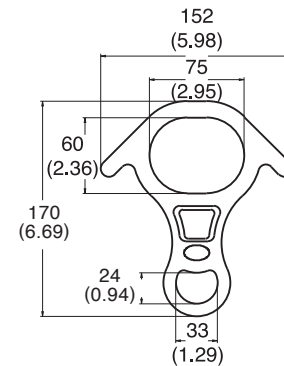


Anodized

mm (inch)

**N-4506
Big Figure 8 Descender**

Steel
 For Rope : 3 / 8 " - 5 / 8 " (9 - 16 mm)
 Min. breaking load : 11000 lbs / 50 kN
 Net weight : 24.2 oz. / 691 g




Zinc Plated

mm (inch)

S-7786-16
Rigging Screw Jaw and Stud

Stainless steel, SUS 316
 For wire rope : 8mm (5 / 16")
 Net weight : 32.0 oz. / 908 g

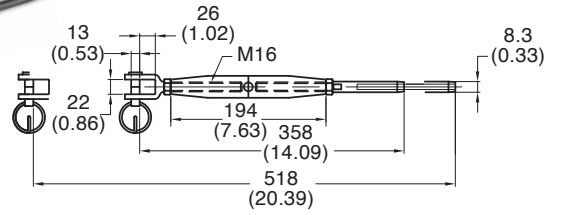


Polished

mm (inch)

S-7789-16
Rigging Screw Stud and Stud

Stainless steel, SUS 316
 For wire rope : 8mm (5 / 16")
 Net weight : 30.0 oz. / 850 g

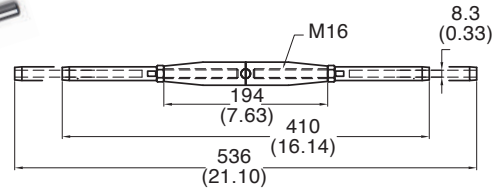


Polished

mm (inch)

S-7801-16
Swage Stud (right thread)

Stainless steel, SUS 316
 For wire rope : 8mm (5 / 16")
 Net weight : 9.0 oz. / 256 g

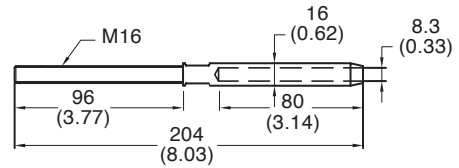


Polished

mm (inch)

S-7802-08
Eye Swage Stud

Stainless steel, SUS 316
 For wire rope : 8mm (5 / 16")
 Net weight : 3.4 oz. / 95 g

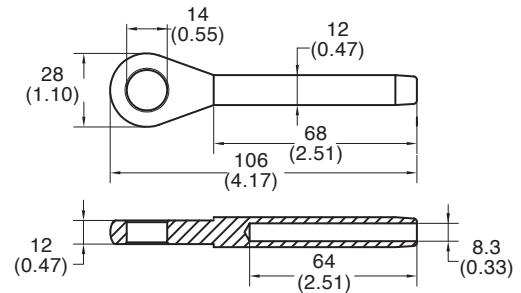


Polished

mm (inch)

S-7805-08
Jaw Swage Stud

Stainless steel, SUS 316
 For wire rope : 8mm (5 / 16")
 Net weight : 7.9 oz. / 223 g

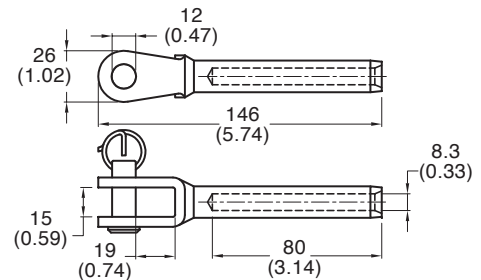


Polished

mm (inch)

N-704
Plastic shoulder pad

Colored : Black
Net weight : 1.8 oz. / 51 g

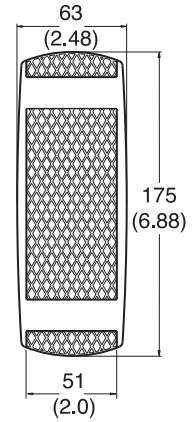


mm (inch)

N-703
Plastic Back pad

Net weight : 2.9 oz. / 83 g

Art. No.	Color
N-703.black	Black
N-703.red	Red
N-703.blue	Blue
N-703.yellow	Yellow
N-703.trans	Transparent

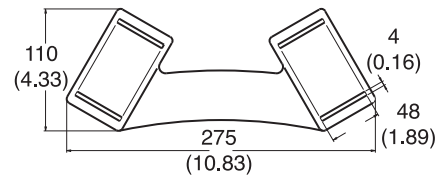


mm (inch)

N-701
Plastic Back pad

Net weight : 1.5 oz. / 44 g


Art. No.	Color
N-701.black	Black
N-701.red	Red
N-701.blue	Blue
N-701.yellow	Yellow

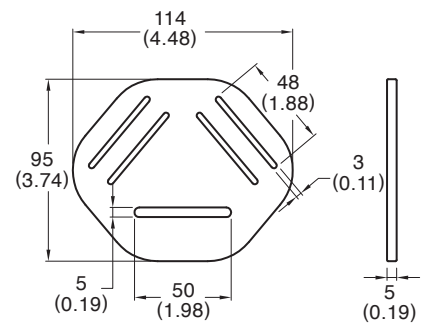

mm (inch)

N-Roller01 / N-Roller02 / N-Roller03 / N-Roller04 / N-Roller05 / N-Roller06 / N-Roller07
Plastic Roller



Art No.	A. Inner Dimension (Ø)	B. Overall Length (mm)
N-Roller01	10	25
N-Roller02	10	51
N-Roller03	12	42
N-Roller04	12	51
N-Roller05	12	65
N-Roller06	12	75
N-Roller07	15	49

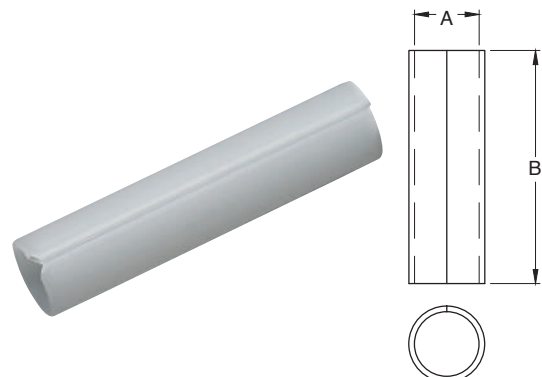

N-710
Plastic Back pad

Net weight : 0.80 oz. / 22 g


Art. No.	Color
N-710.black	Black
N-710.red	Red
N-710.blue	Blue
N-710.yellow	Yellow

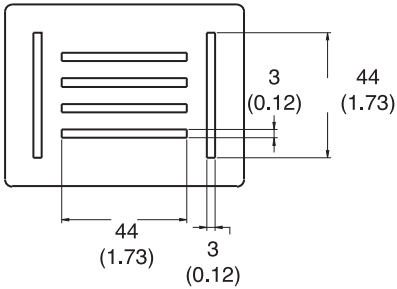

mm (inch)

N-705
Plastic Pad Black

Net weight : 0.4 oz. / 10 g




mm (inch)

N-706
Plastic Keeper

Net weight : 0.3 oz. / 9 g

Art. No.	Color
N-706.black	Black
N-706.red	Red
N-706.blue	Blue
N-706.yellow	Yellow




mm (inch)

N-707
Plastic Back pad

Net weight : 0.1 oz. / 3.5 g

Art. No.	Color
N-707.black	Black
N-707.red	Red
N-707.blue	Blue
N-707.yellow	Yellow




mm (inch)

**N-410
Plastic Thimble**


Net weight : 0.2 oz. / 7 g

Art. No.	Color
N-410.white	White
N-410.red	Red
N-410.blue	Blue
N-410.black	Black

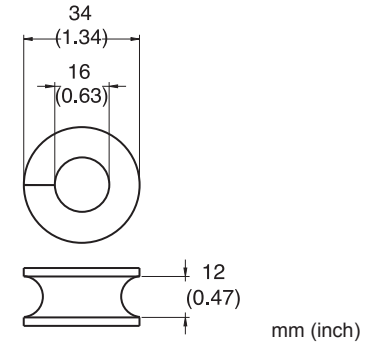

**N-4101
Brass Thimble**


Net weight : 0.21 oz. / 6 g

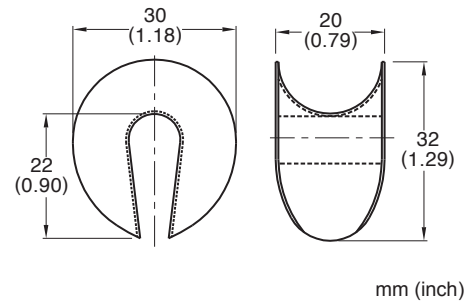

**N-708
Plastic Protector Sleeve**

Net weight : 0.5 oz. / 15 g


Art. No.	Color
N-708.black	Black
N-708.red	Red
N-708.blue	Blue
N-708.yellow	Yellow

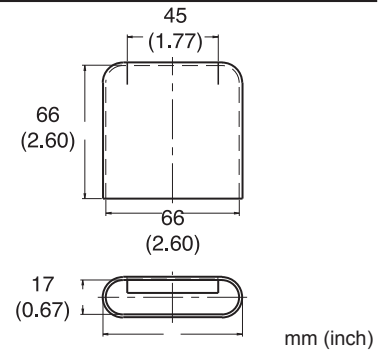

**N-709
Plastic Protector Sleeve**

Net weight : 0.56 oz. / 16 g


Art. No.	Color
N-709.black	Black
N-709.red	Red
N-709.blue	Blue
N-709.yellow	Yellow

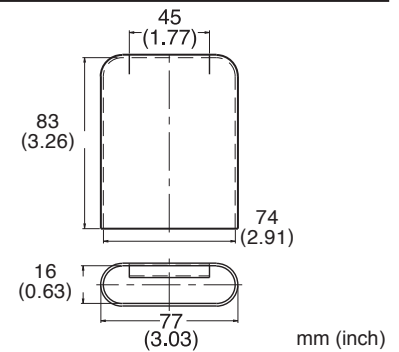

**N-482
Double Lockout Jaw**


Net weight : 4.1 oz. / 117 g

Red Painted.

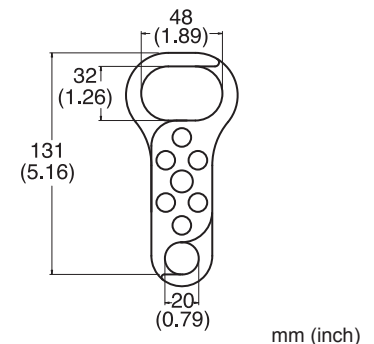

N-252GM-CP
Geomet Carabiner
3600 LBS gate strength


Steel Carabiner
 Alloy steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 Kn
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 8.96 oz. / 254 g
Geomet



mm (inch)

N-248GL
Lifting Carabiner

Alloy steel, heat treated
 Net weight : 10.7 oz. / 303 g.
 Working Load Limit 2500 lbs
 Safety Factor 4 : 1
 For Material Handling



mm (inch)

New


Zinc Plated

N-483-ZN
O Ring

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● Net weight : 5.2 oz. / 148 g



500 Hours Salt Spray




mm (inch)

New

Zinc Nickel

7350-08
Quick Link

Steel
 Net weight : 2.82 oz. / 80g




mm (inch)

Zinc Plated

**7355-08
Delta Link**

Steel
Net weight : 3 oz. / 85g




Zinc Plated

mm (inch)

**N-980
Anchor Point**

Material	Art No.	Net Weight	Ø
Steel	N-980-10	1.9 oz./55 g	10
	N-980-12	2.0 oz./58 g	12
Stainless Steel	N-980-S-10	1.8 oz./50 g	10
	N-980-S-12	1.9 oz./53 g	12

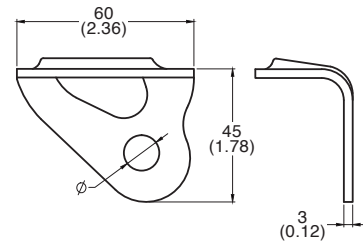

New

Anodized

mm (inch)

INDEX

Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page		
N-220	122	N-3035 / 0	11	N-4013	36	N-425	46	N-489	34	N-533	70	N-651B	110
N-2301-CP	122	N-3036	14	N-4014	36	N-426	46	N-4910	43	N-5330	120	N-660	111
N-244-0-S	78	N-3039	12	N-4016	36	N-427	46	N-4911	43	N-5331	118	N-668	109
N-244G	82	N-3040	12	N-402	31	N-428	36	N-492	25	N-5331B	118	N-670	111
N-245G	84	N-3040-1	13	N-402-S	75	N-429	32	N-492-BT	26	N-5332	120	N-6901	119
N-246G	85	N-3041	13	N-4021L	29	N-430	28	N-493	25	N-5340	119	N-701	126
N-247G-CP	87	N-3049	14	N-402W	31	N-430-S	74	N-493-BT	25	N-5340B	119	N-703	126
N-248G	86	N-3056	12	N-403	26	N-431	28	N-4940-BZP	43	N-5350	121	N-704	126
N-248GL	129	N-3058	13	N-403-S	75	N-431-S	76	N-4941	44	N-5350B	121	N-705	127
N-250G	82	N-3059	13	N-403XL	26	N-432	28	N-500	60	N-5372	118	N-706	127
N-250GK	82	N-306	10	N-403L	26	N-432A-S	75	N-501	60	N-5380	123	N-707	127
N-251G	84	N-314-MX	17	N-404	31	N-432-S	75	N-501110	60	N-5381	123	N-708	128
N-252-S	78	N-315	10	N-404R	31	N-433	41	N-501110X	61	N-5382	123	N-709	128
N-252G	83	N-3155	14	N-405	28	N-433L	41	N-50130	60	N-540	64	N-710	127
N-252GK	83	N-315X	10	N-4052	29	N-434	37	N-5015	61	N-5407	66	N-903	115
N-252GM-CP	129	N-3161	14	N-4053	24	N-435	38	N-5015/0	61	N-5407B	66	N-904	115
N-254G	85	N-3167	11	N-406	32	N-435	38	N-5018	61	N-5416	64	N-904-S	74
N-256-S	78	N-3167 / 0	11	N-407	30	N-436	40	N-5019	66	N-5439	69	N-905	115
N-256G	83	N-325 / 0	17	N-407L	29	N-437	23	N-502	59	N-5719	67	N-907	115
N-258G-CP	87	N-326	17	N-407R	30	N-438	47	N-5020	66	N-5720	67	N-908	119
N-259G-CP	88	N-331	59	N-408	30	N-439	48	N-503	62	N-5721	67	N-980	130
N-261G	86	N-339	59	N-408R	30	N-439X	48	N-5032	62	N-5722	67	N-DE001	51
N-2615G	86	N-350	117	N-409	20	N-440	48	N-5035	62	N-5740	68	N-DE002	51
N-263G-CP	87	N-3501	117	N-410	128	N-441	48	N-5035 / 0	62	N-5741	68	N-DE005	54
N-265G-CP	88	N-3502	117	N-4101	128	N-442	35	N-504	59	N-5742	68	N-DE006	54
N-267G	85	N-351	113	N-411	45	N-443	44	N-505	124	N-5748	68	N-DE007	53
N-268G	84	N-352	113	N-412	43	N-445	27	N-5052	124	N-5860	73	N-DE009	53
N-268G-S	78	N-353	113	N-413	40	N-445L	27	N-506	124	N-5861	73	N-DE244-0	50
N-270	94	N-354	113	N-4135	40	N-448	42	N-507	65	N-5862	73	N-DE300	50
N-271	91	N-355	114	N-413X	40	N-448-S	77	N-5072F	116	N-5867	73	N-DE301	50
N-272	93	N-356	114	N-414	20	N-449	32	N-5072R	116	N-5868	71	N-DE360	50
N-273	94	N-357	114	N-414-S	76	N-4501	38	N-508	69	N-5868T	71	N-DE403	51
N-274	93	N-358	114	N-414R	20	N-4502	39	N-509	69	N-5869	72	N-DE403B	51
N-275	94	N-3591-S	74	N-414X	20	N-4506	124	N-511	69	N-5869T	71	N-DE415	52
N-2750	96	N-360	17	N-415	21	N-451	39	N-512	65	N-5870A	72	N-DE415B	52
N-276	93	N-3610	7	N-415-S	76	N-452	41	N-51428	70	N-5871	72	N-DE420	54
N-277	95	N-3610-S	79	N-415R	21	N-452L	41	N-51445	70	N-5877	71	N-DE4207	55
N-278	95	N-3615	8	N-415X	21	N-453	33	N-51460	70	N-602	108	N-DE422	55
N-281	91	N-3615-S	79	N-416	19	N-455	23	N-518	64	N-602-12	108	N-DE448	55
N-2817	29	N-3616	8	N-416L	19	N-459	117	N-519	64	N-604	109	N-DE452	55
N-282	92	N-3616-S	79	N-416L-R	19	N-460	24	N-5203	65	N-606AP	108	N-DE460	52
N-283	92	N-3617	8	N-416R	19	N-461	24	N-5204	65	N-608	111	N-DE460B	52
N-284	92	N-3618	8	N-417	22	N-469	24	N-5212	70	N-610	105	N-DE483	54
N-2852	96	N-3620T	16	N-418	21	N-475	32	N-5246	58	N-610LY	105	N-DE518	53
N-2852G	101	N-3625T	16	N-419	22	N-476	23	N-5248	58	N-616	106	N-DE529	53
N-2853G	101	N-3625T/0	16	N-419R	22	N-476R	23	N-5261	57	N-617	106	N-RCT27337	9
N-2854	96	N-3630T	15	N-420	37	N-477	22	N-5265	58	N-618	107	N-Roller01	126
N-2854G	101	N-3633T	15	N-420-S	76	N-478	25	N-5265 / 0	58	N-619	107	N-Roller02	126
N-2855	97	N-3633T/0	15	N-4201	37	N-479	47	N-5268	57	N-619T	107	N-Roller03	126
N-2855G	102	N-3658	9	N-4203	38	N-479-S	72	N-5271T	57	N-620	109	N-Roller04	126
N-2857	97	N-3660	9	N-4206	37	N-4793	47	N-5275T	57	N-621	109	N-Roller05	126
N-2857G	102	N-3680	16	N-4207	39	N-4797	47	N-528	63	N-622	109	N-Roller06	126
N-2857 / 0	97	N-3710	7	N-421	38	N-480	117	N-528A	63	N-623	109	N-Roller07	126
N-2857 / OG	102	N-3810	7	N-421-S	77	N-4805	117	N-529	63	N-630	105	S-7786-16	125
N-2859	98	N-3810X	7	N-422	34	N-481	116	N-529A	63	N-630LY	105	S-7789-16	125
N-2859G	103	N-3830T	15	N-422-S	77	N-481R	116	N-5300	121	N-636	106	S-7801-16	125
N-2868G	103	N-400	45	N-4224	34	N-482	128	N-5302	121	N-637	106	S-7802-08	125
N-2817	29	N-400 / S	45	N-4226	34	N-483	33	N-5306	121	N-638	107	S-7805-08	125
N-287	95	N-4001	45	N-423	42	N-483-ZN	129	N-5310	122	N-639	108	7350-08	129
N-3032	10	N-401	35	N-423-S	77	N-485	116	N-5312	122	N-650	110	7355-08	130
N-3033	12	N-4011	35	N-4237	42	N-486	33	N-5320	120	N-650B	110		
N-3035	11	N-4012	35	N-424	42	N-487	33	N-5322	120	N-651	110		



YOKE INDUSTRIAL CORP.

#39, 33rd Road, Taichung Industrial Park,

Taichung 407, TAIWAN

Tel : +886-4-2350-8088

Fax : +886-4-2350-1001

E-mail : info@mail.yoke.net

<http://www.yoke.net>



An ISO 9001 Certified Company